


## XAGA 500

### Joint closure system for unpressurised copper telephone networks


- Heat-shrinkable composite joint closure system for environmental and mechanical protection of joints in the unpressurised telephone network: aerial, buried or ducted, non filled or jelly filled cables with polyethylene, lead, steel or aluminium sheaths
- Composite structure of the reinforced Rayfort sleeve offers an excellent resistance to mechanical abuse during and after the installation
- Integrated moisture barrier completely reconstitutes the cable sheath over the total splice area
- Hot-melt adhesive forms a watertight seal to the cable sheath
- Supporting liner insulates, shapes and compacts the splice bundle
- Up to 3 cables at each end can be accommodated using three finger clips with hot-melt adhesive
- Installation indication: heat sensitive paint and adhesive flow, white line
- Extended size range can accommodate splices up to 800 pairs
- Unlimited shelf life

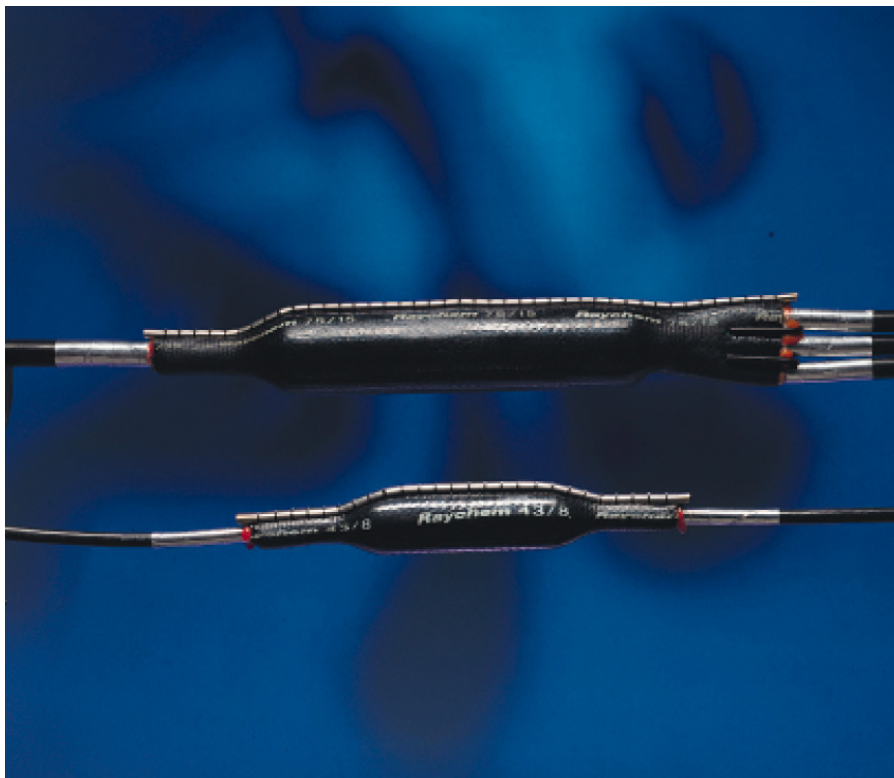


## Sizing/ordering information

Selection chart dimensions (mm)

Description	Max. splice bundle	Min. cable	Nominal
	diameter(A)	diameter (B)	sheath opening (L)
XAGA 500-43/8-150	43	8	150
XAGA 500-43/8-300	43	8	300
XAGA 500-55/12-150	55	12	150
XAGA 500-55/12-300	55	12	300
XAGA 500-75/15-240	75	15	240
XAGA 500-75/15-300	75	15	300
XAGA 500-75/15-400	75	15	400
XAGA 500-100/25-260	100	25	260
XAGA 500-100/25-460	100	25	460
XAGA 500-100/25-500	100	25	500
XAGA 500-125/30-265	125	30	265
XAGA 500-125/30-460	125	30	460
XAGA 500-125/30-500	125	30	500




## Kit content

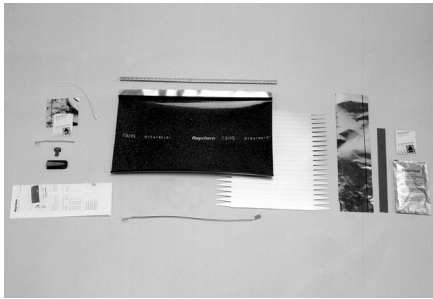

- Heat-shrinkable sleeve
- Channels with underclip
- Flexible liner
- Cleaning tissue
- Abrasive strip
- Desiccant (Silicagel)
- Aluminium foil
- Branch-off kit
- Shield continuity wire
- Installation instruction

## BOKT kit content

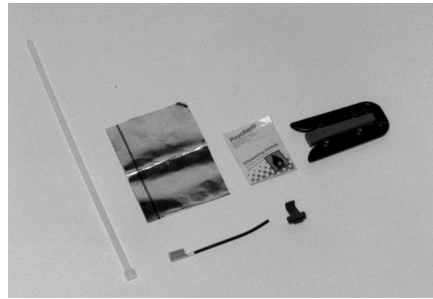


- Branch off clip
- Shield continuity wire + connector
- Cleaning tissue
- Aluminium foil
- Tie wrap

### \* Note for branched joints

1 The standard XAGA 500 kit is designed for max. 2 cables branched at one end only. Branched joints with more cables require the use of one additional branch-off kit (BOKT-5S or 5M) per added cable.

2 For joints with 2 or more cables in one end the overall diameter must be determined. Add 6 mm for every small clip or 8 mm for every medium clip. In each case the total diameter may not exceed the maximum joint diameter. See below.

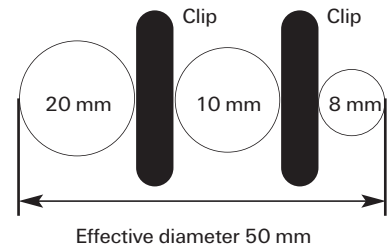

Use kit XAGA 500-75/15-xxx depending on joint length.

### \* Note for filled joints (optional)

A special filling compound RSS and filling kit components are available.

Description:

XAGA-500-xx/xx-xxx-S

## Sizing/ordering information BOKT kit

Description	
BOKT-5S-43/8-75/15	XAGA 500-43/8-xxx and XAGA 500-75/15-xxx
BOKT-5M-92/25-125/30	XAGA 500-100/25-xxx and XAGA 500-125/30-xxx

**tyco**

Electronics

Tyco Electronics Raychem NV

Diestsesteenweg 692

3010 Kessel-Lo, Belgium

Tel 32-16 351 011 (USA) 1-919-557-8900

Fax 32-16 351 697 (USA) 1-919-557-8498

www.tycoelectronics.com

www.telecomosp.com

*a vital part of your world*

© 2005 Tyco Electronics  
TC 195/DS/6 08/04

Tyco and XAGA are trademarks

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.