

TJP 5.x

Indoor voltage transformers



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK

Highest voltage for equipment	[kV]	12 - 17,5
Power frequency test voltage, 1 min.	[kV]	28 - 38
Fuses	[A]	0.3, 0.6 or 2 or 6,3 (IEC)
Lightning impulse test voltage	[kV]	75 - 95
Max. rated burden, classes	[VA/cl]	25/0.2 - 50/0.5 - 100/1
Residual winding	[VA/cl]	50 - 200/6P



Description

The TJP 5.x epoxi insulated voltage transformers are cast in epoxi resin and designed mostly for insulation voltages of 12 kV to 17,5 kV.

If no a different value is required the transformers are manufactured with a overvoltage factor of $1.9 \times U_n/8$ hrs. One outlet of the primary winding, including the respective terminal is insulated from the earth to a level which corresponds to the rated insulation value. The other outlet of primary winding with its terminal is earthed during the operation. Most of the transformers are equipped with two secondary windings, the first one for either measuring or protection purposes, the other for being connected into an open-delta connection in a three-phase system. One terminal of each secondary winding and one of the open-delta connected terminals have to be earthed during the transformer operation.

The secondary windings are lead out into a cast-type secondary terminal board. The secondary terminal board is covered with a sealed plastic over.

The transformer can be mounted in any position. The transformer body is fixed by four screws, the bolted M8 earthing clamp is located on the transformer base plate. The TJP 5.0 transformer is equipped with a fuse conformably to IEC standard. The design of TJP 5.0 is suitable for ABB AIS panels (see HV terminal and the position of the secondary terminals)

The TJP 5.1 transformer is equipped with a special fuse of either 0.3A or 0.6 A rated current (JT 6 type). The design of TJP 5.1 is suitable for the „cable“ connection (see HV terminal and the position of the secondary terminals)

The TJP 5.2 transformer is equipped with a fuse conformably to IEC standard. The design of TJP 5.2 is suitable for the „cable“ connection (see HV terminal and the position of the secondary terminals)

Rated primary voltages ... $10/\sqrt{3}$ kV; $11/\sqrt{3}$ kV; $13,8/\sqrt{3}$ kV; $15/\sqrt{3}$ kV; Other primary voltages can also be supplied on request.

Rated secondary voltages... $100/\sqrt{3}$ V; $110/\sqrt{3}$ V – accuracy classes 0.2; 0.5; 1 (measuring winding) or 3P; 6P (protection winding).

Other secondary voltages can also be supplied on request.

Rated voltages for open-delta connection: ... $100/3$ V; $110/3$ V- class 6P


Other voltages for open-delta connection can also be supplied based on customer requirement.

Rated frequency ... 50 Hz; 60 Hz

Based on a discussion with the manufacturer the transformer can also be provided with primary winding designed for two different primary voltages (with secondary side changeover). The transformers are manufactured conformably to the requirements and recommendations of the following standards and regulations: IEC, VDE, ANSI, BS, GOST and CSN.


Dimensions

TJP5.0: fuse IEC 60282-1

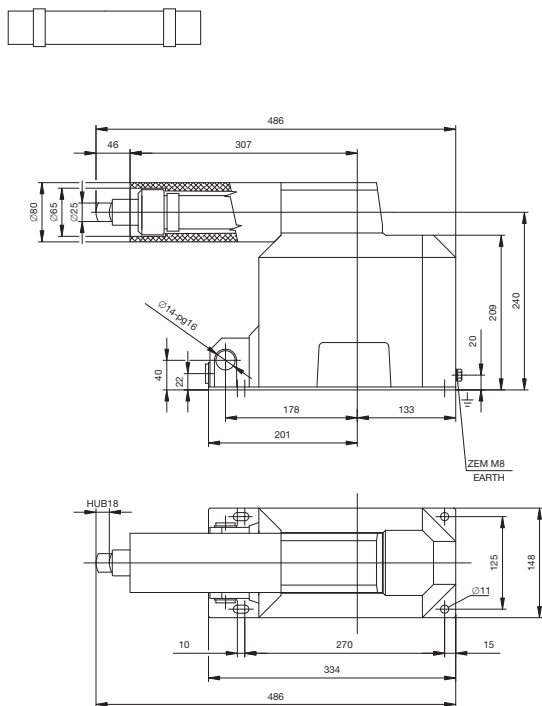


Drawing n. 44204060
Weight: 27 kg

TJP5.1: fuse JT6 300,600mA

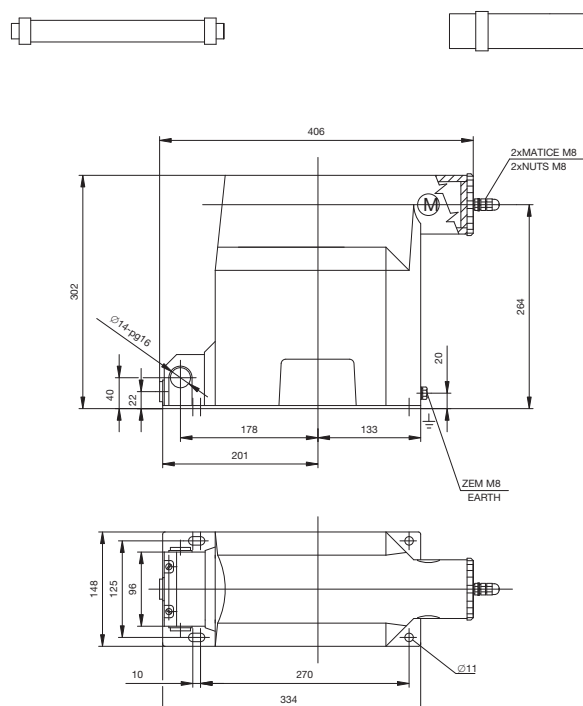


TJP5.1:
Drawing n. 44204080
Weight: 24 kg

TJP5.2: fuse IEC 60282-1

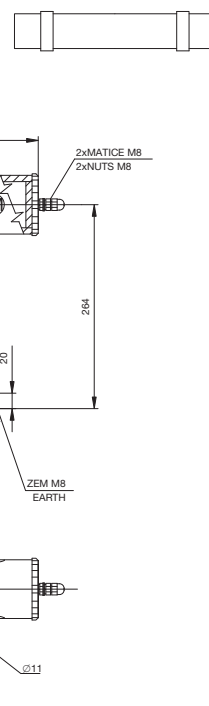

TJP5.2:
Drawing n. 44204090


Marking of the voltage transformer outlets

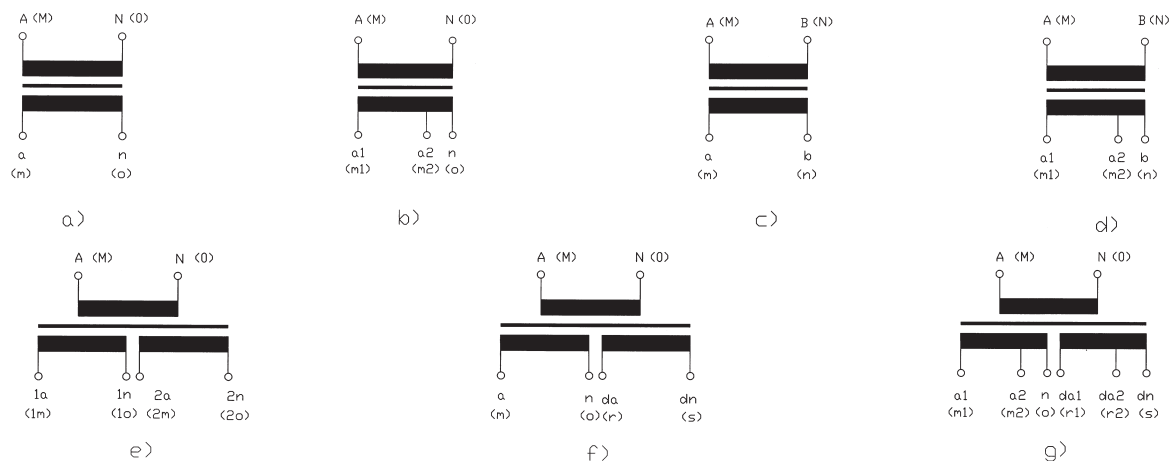

a) Single-pole insulated transformer | b) Single-pole insulated transformer with a tap | c) Double-pole insulated transformer | d) Double-pole insulated transformer with a tap | e) Single-pole insulated transformer with two secondary windings | f) Single-pole insulated transformer with two secondary windings, with one of which being the auxiliary (residual) winding | g) Single-pole insulated transformer with two secondary, tapped windings, with one which being the auxiliary (residual) winding.

Standard execution of the transformers

Primary voltage,V	Secondary voltage			Residual winding		
	voltage,V	accuracy	burden, VA	voltage,V	accuracy	burden, VA
10000/√3	100/√3	0,2	10,15,25			
10000/√3	100/√3	0,2	10,15,25	100/3	6P	50
10000/√3	100/√3	0,2	10,15,25	100/3	6P	100
10000/√3	110/√3	0,2	10,15,25			
10000/√3	110/√3	0,2	10,15,25	110/3	6P	50
10000/√3	110/√3	0,2	10,15,25	110/3	6P	100
10000/√3	100/√3	0,5	15,25,50			
10000/√3	100/√3	0,5	15,25,50	100/3	6P	50
10000/√3	100/√3	0,5	15,25,50	100/3	6P	100
10000/√3	110/√3	0,5	15,25,50			
10000/√3	110/√3	0,5	15,25,50	110/3	6P	50
10000/√3	110/√3	0,5	15,25,50	110/3	6P	100
10000/√3	100/√3	1	50,75,100			
10000/√3	100/√3	1	50,75,100	100/3	6P	50
10000/√3	100/√3	1	50,75,100	100/3	6P	100
10000/√3	110/√3	1	50,75,100			
10000/√3	110/√3	1	50,75,100	110/3	6P	50
10000/√3	110/√3	1	50,75,100	110/3	6P	100
11000/√3	100/√3	0,2	10,15,25			
11000/√3	100/√3	0,2	10,15,25	100/3	6P	50
11000/√3	100/√3	0,2	10,15,25	100/3	6P	100
11000/√3	110/√3	0,2	10,15,25			
11000/√3	110/√3	0,2	10,15,25	110/3	6P	50
11000/√3	110/√3	0,2	10,15,25	110/3	6P	100
11000/√3	100/√3	0,5	15,25,50			
11000/√3	100/√3	0,5	15,25,50	100/3	6P	50
11000/√3	100/√3	0,5	15,25,50	100/3	6P	100
11000/√3	110/√3	0,5	15,25,50			
11000/√3	110/√3	0,5	15,25,50	110/3	6P	50
11000/√3	110/√3	0,5	15,25,50	110/3	6P	100
11000/√3	100/√3	1	50,75,100			
11000/√3	100/√3	1	50,75,100	100/3	6P	50
11000/√3	100/√3	1	50,75,100	100/3	6P	100
11000/√3	110/√3	1	50,75,100			
11000/√3	110/√3	1	50,75,100	110/3	6P	50
11000/√3	110/√3	1	50,75,100	110/3	6P	100
13800/√3	100/√3	0,2	10,15,25			
13800/√3	100/√3	0,2	10,15,25	100/3	6P	50
13800/√3	100/√3	0,2	10,15,25	100/3	6P	100
13800/√3	110/√3	0,2	10,15,25			
13800/√3	110/√3	0,2	10,15,25	110/3	6P	50
13800/√3	110/√3	0,2	10,15,25	110/3	6P	100
13800/√3	100/√3	0,5	15,25,50			
13800/√3	100/√3	0,5	15,25,50	100/3	6P	50
13800/√3	100/√3	0,5	15,25,50	100/3	6P	100
13800/√3	110/√3	0,5	15,25,50			
13800/√3	110/√3	0,5	15,25,50	110/3	6P	50
13800/√3	110/√3	0,5	15,25,50	110/3	6P	100
13800/√3	100/√3	1	50,75,100			
13800/√3	100/√3	1	50,75,100	100/3	6P	50
13800/√3	100/√3	1	50,75,100	100/3	6P	100
13800/√3	110/√3	1	50,75,100			
13800/√3	110/√3	1	50,75,100	110/3	6P	50
13800/√3	110/√3	1	50,75,100	110/3	6P	100
15000/√3	100/√3	0,2	10,15,25			
15000/√3	100/√3	0,2	10,15,25	100/3	6P	50
15000/√3	100/√3	0,2	10,15,25	100/3	6P	100
15000/√3	110/√3	0,2	10,15,25			
15000/√3	110/√3	0,2	10,15,25	110/3	6P	50
15000/√3	110/√3	0,2	10,15,25	110/3	6P	100
15000/√3	100/√3	0,5	15,25,50			
15000/√3	100/√3	0,5	15,25,50	100/3	6P	50
15000/√3	100/√3	0,5	15,25,50	100/3	6P	100
15000/√3	110/√3	0,5	15,25,50			
15000/√3	110/√3	0,5	15,25,50	110/3	6P	50
15000/√3	110/√3	0,5	15,25,50	110/3	6P	100
15000/√3	100/√3	1	50,75,100			
15000/√3	100/√3	1	50,75,100	100/3	6P	50
15000/√3	100/√3	1	50,75,100	100/3	6P	100
15000/√3	110/√3	1	50,75,100			
15000/√3	110/√3	1	50,75,100	110/3	6P	50
15000/√3	110/√3	1	50,75,100	110/3	6P	100

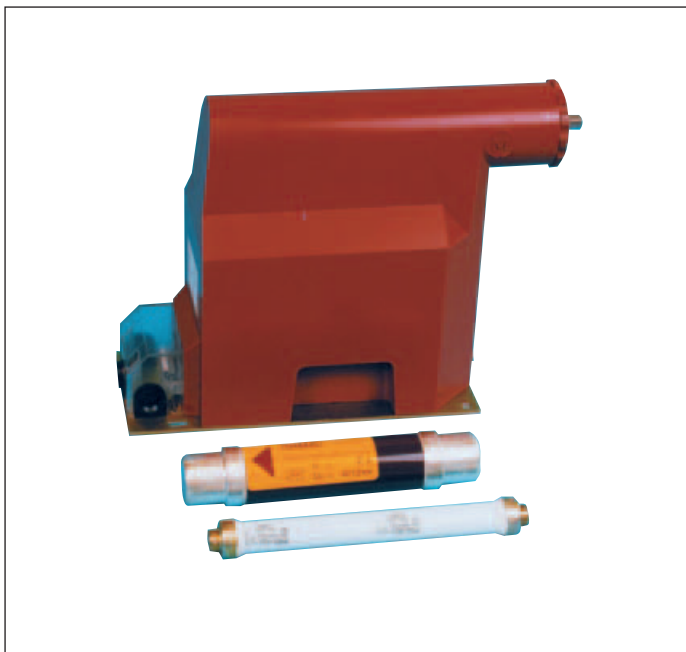

Voltage transformer with suitable fuses

ABB s.r.o.

PPMV Brno

Videnska 117

619 00 Brno, Czech Republic

Tel.: +420 547 152 602

+420 547 152 614

Fax: +420 547 152 626

E-mail: info.ejf@cz.abb.com

www.abb.com

The data and illustrations in this catalogue are not binding. We reserve the right to make changes of the content, in the course of technical development of the product.