

Kit Contents – Single Core Heat Shrink Terminations for XLPE or Epr Cables 7.2 to 33kV


Indoor



Kit Contents	
Anti-Track Core Tubes	Qty 3
Stress Control Tubes	Qty 3
Yellow Stress Relief Tape for Screen Ends	Qty 3
Red Mastic Sealing Tape	Qty 1
De-Grease Tissues	Qty 3
Box, Label, Instructions	Qty 1

Optional Accessories
Earth Spring Kit For Cu Tape Screens
Bushing Protection Boots
Bolt On Heat Shrink Earth Gland
Stand Off Bracket / Insulators
Armour Earthing (Outdoor)
MV Water Blocked Lugs
MV Mechanical Shearbolt Lugs

Outdoor

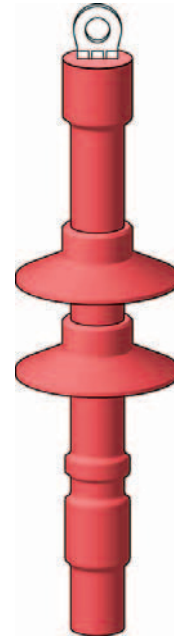

Kit Contents	
Anti-Track Core Tubes	Qty 3
Stress Control Tubes	Qty 3
Stress Relief Tape for Screen Ends	Qty 3
Red Mastic Sealing Tape	Qty 1
De-Grease Tissues	Qty 3
Rain Sheds	Qty *
Box, Label, Instructions	Qty 1

* See table below for number of sheds

Per Phase	Indoor	Outdoor
7.2kV	0	1
12kV	0	2
17.5kV	0	2
24kV	0	3
36kV	1	4