

# Installation Instructions





# BAND-IT Ties

Maximum Operating Temperature: Coating = 300°F (149°C)

Rated Load (Loop Tensile Strength, single wrap) :  
1/4" Tie = 75 LBS  
3/8" Tie = 100 LBS  
5/8" Tie = 200 LBS

Rated Load (Loop Tensile Strength, double wrap) :  
1/4" Tie = 300 LBS  
3/8" Tie = 500 LBS  
5/8" Tie = 800 LBS

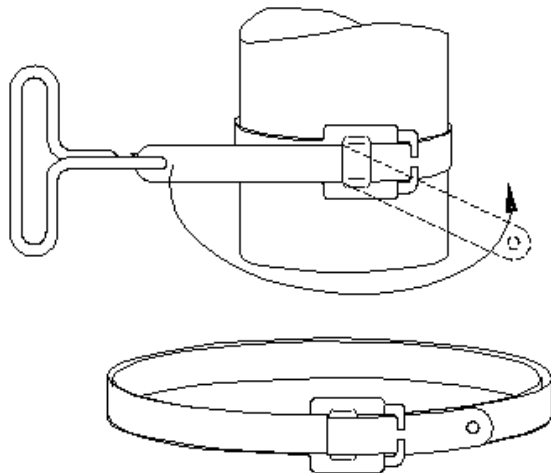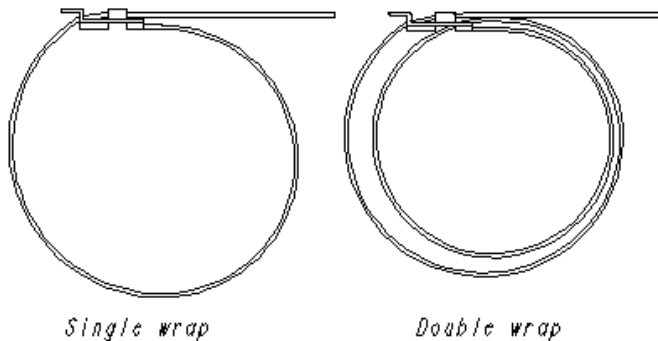

1. Wrap BAND-IT tie around object with the locking ears up. Wrap per diagram at left.
2. Tighten BAND-IT ties with one of these (listed in order of increasing tension):
  - By hand,
  - BAND-IT AE201 Tensioning Hook,
  - BAND-IT AE200 Tensioning Tool,
  - BAND-IT C075 Bantam Tool.

3. Bend tail back over raised bridge.

4. Secure tail under ears by slightly pushing the tail sideways and down, first one way then the other.

5. Tail may be left on for re-use.

6. Optional: Hammering down the bridge may increase the strength of the lock, but will not allow the clamp to be re-used.

Refer to website for warranty information: <http://www.band-it-idex.com/warranty.html>

BAND-IT-IDEX, Inc.  
A Unit of IDEX Corporation  
4799 Dahlia Street  
Denver, CO 80216-3070 USA  
P: 1-800-525-0758  
F: 1-800-624-3925



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS  
FURSE EARTHING  
www.cablejoints.co.uk  
Thorne and Derrick UK  
Tel 0044 191 490 1547 Fax 0044 191 477 5371  
Tel 0044 117 977 4647 Fax 0044 117 9775582

BAND-IT Clamps (Asia) Pte. Ltd.  
11 Second Chin Bee Road  
Singapore 618777  
P: 65-6265-8853  
65-6265-8783  
F: 65-6265-8902

[www.BAND-IT-IDEX.com](http://www.BAND-IT-IDEX.com)

[www.BAND-IT-clamps.com](http://www.BAND-IT-clamps.com)