



ALROC - MV - Bonded semi-conductor ASC



ISO 9001

BUREAU VERITAS
Certification



**THORNE &
DERRICK
INTERNATIONAL**

www.cablejoints.co.uk
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582

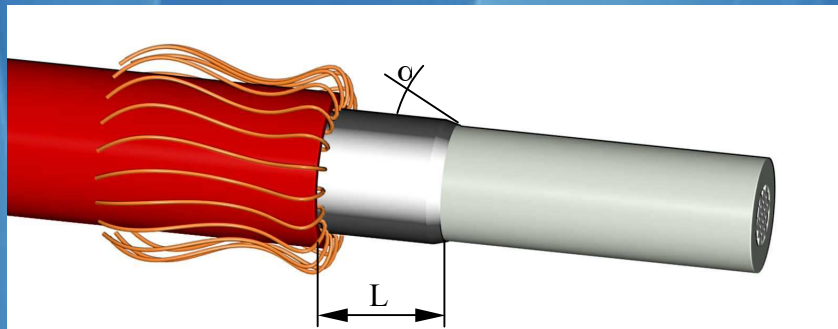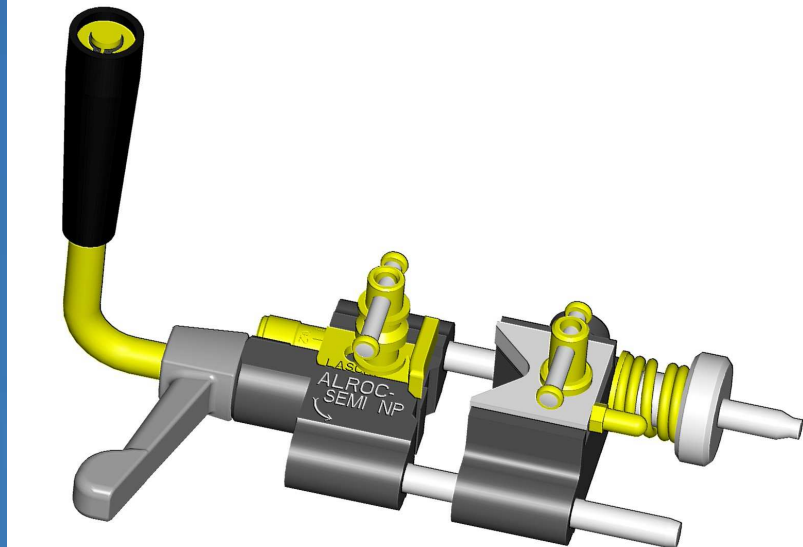

FUNCTIONS

ASC tool removes the bonded semi-conductor from MV and HV cables and chamfers the semi-conductor in a clean and swift manner.

CHARACTERISTICS

- ☞ Removal of the bonded semi-conductor
- ☞ The blade is adjustable from
- ☞ 0.4mm to 1.4mm

ASC
CHOICE

L Length of semi-con left	Cable Ø14 to 40mm	Cable Ø38 to 60mm
15 mm	ASC 15R1	
20 mm	ASC 20R1	
25 mm	ASC 25R1	ASC 25R2
30 mm	ASC 30R1	ASC 30R2
40 mm	* ASC 40R1	* ASC 40R2
* Weight	650 g	850 g