


Armoured Cables CM range

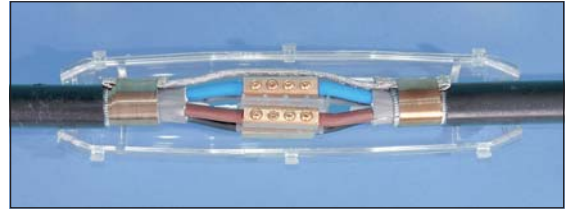


Max Cable Size 4 core (mm ²)	Basic Joints		Basic Joints plus Mechanical Connectors	
	Part No	Earth Kit included	Part No	Connectors included
1.5 - 6	CM0	Braid & Constant Force Springs	CM0+C	4 x MC1/0 & Allen Key
10 - 16	CM1	Braid & Constant Force Springs	CM1+C	4 x MC1/1 & Allen Key
25	CM2	Braid & Constant Force Springs	CM2+C	4 x MC1/2 & Allen Key
35 - 95	CM3	Braid & Constant Force Springs	CM3+C	4 x MC1/3 & Allen Key
120	CM4	Braid & Constant Force Springs	CM4+C	4 x MC1/3 & Allen Key
150	CM5	Braid & Constant Force Springs	CM5+C	4 x MC1/5
185 - 240	CM6	Braid & Constant Force Springs	CM6+C	4 x MC1/6
300 - 400	CM7	Braid & Constant Force Springs	CM7+C	4 x MC1/7

Basic joints with compression ferrules instead of mechanical connectors are also available

		Quick Selection															
No of cores	Cable size (mm ²)																
	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300	400
2	CM0				CM1			CM2		CM3			CM4		CM5		
3	CM0			CM1		CM2	CM3				CM4	CM5		CM6			
4	CM0			CM1		CM2	CM3				CM4	CM5	CM6		CM7		

Unarmoured Cables CM EX range

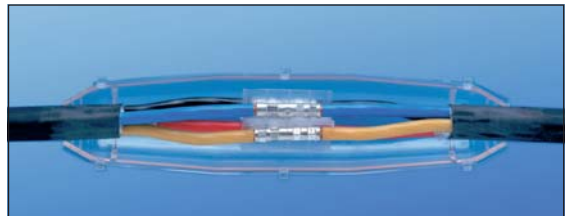

Max Cable Size 4 core (mm ²)	Basic Joints		Basic Joints plus Mechanical Connectors	
	Part No		Part No	Connectors included
1.5 - 10	CM0EX		CM0EX+C	4 x MC1/0 & Allen Key
16	CM1EX		CM1EX+C	4 x MC1/1 & Allen Key
25 - 35	CM2EX		CM2EX+C	4 x MC1/2 & Allen Key
50 - 95	CM3EX		CM3EX+C	4 x MC1/3 & Allen Key
120	CM4EX		CM4EX+C	4 x MC1/3 & Allen Key
150 - 185	CM5EX		CM5EX+C	4 x MC1/5
240 - 300	CM6EX		CM6EX+C	4 x MC1/6
400	CM7EX		CM7EX+C	4 x MC1/7

Basic joints with compression ferrules instead of mechanical connectors are also available

		Quick Selection															
No of cores	Cable size (mm ²)																
	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300	400
2	CM0EX				CM1EX			CM2EX		CM3EX			CM4EX		CM5EX		
3	CM0EX			CM1EX		CM2EX	CM3EX				CM4EX	CM5EX		CM6EX			
4	CM0EX			CM1EX		CM2EX	CM3EX				CM4EX	CM5EX	CM6EX		CM7EX		

LV Straight