


A-M

RING TONGUE TERMINALS WITH CONTAINED PALM

for L.V. circuit breakers
for copper conductors

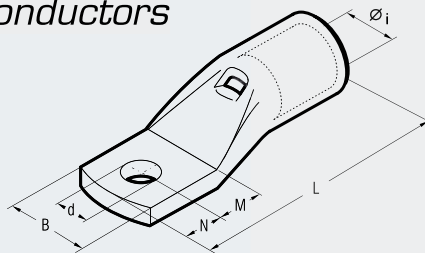

This range of lugs features contained palm width.

Our lugs have been specifically developed for application on L.V. circuit breakers with reduced space terminal blocks. In fact the contained palm width allows an immediate and easier installation. Our lugs are manufactured from electrolytic copper tube.

The specifically designed section of the barrel and the choice of principal dimensions are optimising the best combination of mechanical strength and electrical conductivity.

Our lugs are annealed to guarantee optimum ductility and are electrolytically tin-plated to avoid oxidation.

The barrel is provided with an internal taper to ease the introduction of the conductor; furthermore, its length grants a comfortable and correct positioning between dies, during crimping operations.

Each lug palm is marked with the Cembre logo and part number.

Conductor Size Flexible sqmm	Ø Stud mm	Ref.	Dimensions mm							Quantity Box/Bag	Mechanical Tools	Hydraulic Tools				
			Øi	B	M	N	L	d	TN 70 SE			TN 120 SE	B 15	HT 45-E	HT 51 RH 50 B 51	HT 81-J RHU 81
10	5	A 2-M 5/9	4,6	9,0	6,5	6,0	26,0	5,3		1000/100	TN 70 SE					
16	5	A 3-M 5/9	5,8	9,0	6,5	6,0	29,0	5,3	1000/100							
25	5	A 5-M 5/9	7,0	9,0	6,5	6,0	31,5	5,3	500/100							
35	6	A 7-B-M 6/11,5	8,9	11,5	8,0	7,0	36,5	6,4	400/100							
50	6	A 10-B-M 6/11,5	10,0	11,5	8,0	7,0	40,5	6,4	200/50							
70	6	A 14-B-M 6/11,5	11,3	11,5	8,0	7,0	44,0	6,4	200/50							
95	8	A 19-B-M 8/15,5	13,5	15,5	9,0	8,0	52,5	8,4	100/25							
120	8	A 24-B-M 8/19	15,2	19,0	14,0	9,0	60,0	8,4	100/25							
	10	A 24-B-M 10/19	15,2	19,0	14,0	9,0	60,0	10,5	100/25							
150	8	A 30-B-M 8/19	16,7	19,0	18,0	9,0	70,0	8,4	50/25							
	10	A 30-B-M 10/19	16,7	19,0	18,0	9,0	70,0	10,5	50/25							
185	10	A 37-B-M 10/24,5	19,2	24,5	18,0	9,0	77,0	10,5	50/25							
	10	A 48-M 10/31	21,1	31,0	13,0	9,0	80,0	10,5	30/15							
240	12	A 48-M 12/31	21,1	31,0	16,0	12,0	86,0	13,2	30/15							
	16	A 48-M 16/31	21,1	31,0	19,0	17,0	94,0	17,0	30/15							
300	12	A 60-B-M 12/31	23,7	31,0	16,0	12,0	95,0	13,2	20/10							



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK