



The World of Electrical safety



CATU™

T&D

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk

Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582





First and largest european specialist in Electrical safety equipment

CATU was created in 1919 and, since the beginning, it has dedicated its activity to the manufacture of material and equipment for electricity networks and installations.

Since 1936, CATU's activity has been concentrated on equipment for personal protection against electrical hazards and accordingly, has now 70 years experience in this field.

After the end of World War II, many French companies involved in Production, Transmission and Distribution of Electrical Energy were amalgamated into one National Company, called "Electricité de France" (EDF).

A short time later, a central department for Safety and Prevention of Accidents was created within EDF. Because of the experience that CATU already had in this field, a very close cooperation was forged between EDF and CATU which resulted in joint development and improvement of all the important Safety Material and Equipment now used in France.

The international recognition gained by EDF in this field has contributed to giving CATU a foremost position at the World Wide level.

At the present time, CATU Safety Equipment, including all the range of short-circuiting and earthing systems, the DETEX™ voltage detectors and testers, the live working tools and the individual equipment for linesmen, is used by the Main Power Utilities, Electrical Contractors, Large Industries and Railways in about 100 countries spread over the 5 continents.

CATU's experience and level of investment and research is unmatched. As a member of the main national and international technical committees (such as UTE, CENELEC, IEC and ASTM), CATU is contributing to the development and application of the latest technologies. This quest for continuous improvement is now reinforced with the ISO 9001 Quality Insurance Certification.

Our endeavours to be the Specialist in Electrical Safety Equipment are made with genuine dedication to all aspects of Safety Engineering Principles. Together with our network of distributors, we acknowledge our commitment and obligations to our customers.

CATU is a Group Sicame Company

www.catuelec.com



AFAQ N°1995/4795 b



N°: 1-0897



| | | | |
|---------------------------------|----------|---------------------|-----------|
| General Products index | 4 | IEC Standard | 9 |
| General References index | 6 | Golden rules | 10 |

Low voltage

Below 1000 V

| | | | |
|--|-----------|--|-----------|
| Equipment guide | 14 | Installation testers | 28 |
| Personal protective equipment | 18 | - insulation tester | 28 |
| - head and eyes protection | 18 | - installation testers identifier | 29 |
| - insulating rubber gloves | 20 | - multimeter clamp-meter | 31 |
| - insulating mats and boots | 21 | Short-circuiting and earthing systems | 32 |
| Safety padlocks and warning signs | 22 | - for bare overhead lines | 32 |
| - padlocks | 22 | - for insulated overhead lines | 33 |
| - warning signs and delineators | 23 | - for consumer units | 34 |
| - self adhesive warning signs | 24 | - ISOSTOP™ system | 34 |
| Voltage detectors and testers | 25 | - jumper systems | 34 |
| - 6 to 690 V detectors and testers | 25 | - mini jumper clamps | 36 |
| - voltage detectors accessories | 27 | Bimaterial insulated tools | 38 |
| | | Insulated tools | 41 |

Medium voltage

From 1kV to 52 kV

| | | | |
|--|-----------|---|-----------|
| Equipment guide | 54 | Voltage detectors | 79 |
| Personal protective equipment | 58 | - IEC electronic voltage detectors | 79 |
| - head and eyes protection | 58 | - standard electronic voltage detectors | 80 |
| - insulating rubber gloves | 60 | - insulating sticks | 81 |
| - insulating mats and platforms | 61 | - phase comparators | 82 |
| - arc flash equipment | 62 | Short-circuiting and earthing systems | 84 |
| - equipment for working on pole | 63 | - cables | 84 |
| - padlocks | 67 | - IEC overhead lines systems (work from pole) | 85 |
| Substation equipment | 68 | - clamps and accessories | 86 |
| - warning signs and delineators | 68 | - over head line system (work from ground) | 87 |
| - safety equipment | 71 | - insulating sticks | 88 |
| - IEC short-circuiting and earthing systems | 72 | - disconnect and measuring sticks | 89 |
| - clamps and earth clamps | 73 | - underground systems | 90 |
| - insulating sticks | 74 | General tools | 91 |
| - special short-circuiting and earthing systems (for 200 and 400 A separable connectors) | 75 | - sticks accessories | 91 |
| - voltage detectors and indicators | 76 | - tensioning equipment | 93 |
| - life saving kits | 78 | - handling and uncoiling blocks | 95 |
| | | Earth rods | 96 |
| | | - earth rods and connectors | 96 |
| | | - earthing clip and earth tester | 97 |

High voltage

Above 52 kV

| | | | |
|--|------------|--|------------|
| Equipment guide | 100 | Voltage detectors | 113 |
| Personal protective equipment | 102 | - electronic voltage detectors | 113 |
| - head and eyes protection | 102 | - insulating sticks | 114 |
| - insulating rubber gloves | 104 | Short-circuiting and earthing systems | 115 |
| - insulating mats and boots | 105 | - HV and EHV clamps | 115 |
| - equipment for working on pole | 106 | - insulating sticks | 116 |
| Safety padlocks and warning signs | 110 | - earth clamps | 116 |
| - padlocks | 110 | - fixed points and cables | 117 |
| - warning signs | 111 | - accessories | 118 |
| - delineators | 112 | | |

A

| | |
|--|---------|
| Adhesive tape (safety) | .23 |
| Adaptors for insulating sticks | .91 |
| Adjustable spanner (insulated tools) | .46 |
| Anti-fall grip | .63/106 |
| Anti-fall device | .65/108 |
| Arc flash equipment | .62 |

B

| | |
|--|------------|
| Bags | |
| - For tools | .50 |
| - Carrying for rubber gloves | .20/60/104 |
| - For earthing systems | .118 |
| - For insulated sticks | .89 |
| - For insulating mats | .21/61 |
| Bent snipe nose pliers (insulated tools) | .39/42 |
| Bimaterial insulated tool set | .40 |
| Blocks | |
| - Opening | .95 |
| - Uncoiling | .95 |
| Boots, insulating | .21/61 |
| Boundary post | .23/70/112 |
| Brushes | |
| - For conductors | .92 |
| - Cleaning | .92 |

C

| | |
|--|------------|
| Cable cutters (insulated tools) | .39/43/44 |
| Cable launcher projector | .118 |
| Cables | |
| - Copper for earthing systems | .84/117 |
| - Aluminium for earthing systems | .84/117 |
| Chain delineator | .23/70/112 |
| Clamps, short-circuiting systems | |
| - Medium Voltage | |
| . For installations and substations | .73 |
| . Automatic | .85 |
| - High voltage | |
| . Manoeuvrable by insulating sticks | .115 |
| . Rope operated | .118 |
| Clamp dispenser heads | .86 |
| Climbers | |
| - For wooden poles | .66 |
| - For rectangular shaped concrete poles | .66 |
| - For round and hexagonal concrete poles | .66 |
| - For H profile pole | .66 |
| Come-along | |
| - Automatic clamp | .93 |
| - Adjustment | .93 |
| - Parallel jaws | .94 |
| Combination wrench (insulated tools) | .46 |
| Comparator, sound phase | .77 |
| Comparators, Two poles phase | .82/83 |
| Comparator single pole | .83 |
| Connector with stick adapter | .65 |
| Connectors for earth rods | .96 |
| Constraint tie | .65/108 |
| Covers for insulating sticks | .88 |
| Cranked ring wrench (insulated tools) | .47 |
| Crocodile clamps (safety) | .27 |

D

| | |
|-------------------------------|------------|
| Delineators | .23/70/112 |
| Descent device | .63/106 |
| Diameter gauge | .92 |
| Digital clamp meter | .31 |
| Digital multimeter | .31 |

E

| | |
|--|----------|
| Earth clamps, High Voltage | .116 |
| Earth clamps, Medium voltage | .73 |
| Earth rod for low voltage earthing systems | .33 |
| Earth rods for medium voltage earthing clip | .97 |
| Earthing systems | .86 |
| Earth rods | .96 |
| Earthing systems | |
| - Low voltage | |
| . For overhead lines | .32/33 |
| - Medium Voltage | |
| . For overhead lines IEC | .85 |
| . For overhead lines | .87 |
| . For substations IEC | .72 |
| . For substations (for 250 and 400 A connectors) | .75 |
| . For underground cables | .90 |
| - High Voltage | |
| . High voltage systems | .115/116 |
| Electrician's scissors | .45 |
| End cutting pliers (insulated tools) | .43 |

F

| | |
|--|------------|
| Face shield | .18/58/102 |
| Fall arrester | .64/107 |
| Fixing tools for warning signs | .23 |
| Fixed points | |
| - Medium Voltage | .73 |
| - High Voltage | .117 |
| Flags, warning | .70/112 |
| Flat nose pliers (insulated tools) | .39/42 |
| Frontal ratchet cable cutter | .44 |
| Fuse holder for substation | .71 |
| Fuse puller | .92 |

G

| | |
|--------------------------------------|------------|
| Glasses | |
| - Safety glasses | .18/58/102 |
| - Safety overglasses | .18/58/102 |
| Gloves | |
| - Insulating rubber gloves | .20/60/104 |
| - Overgloves | .20/60/104 |
| - Undergloves | .20/60/104 |
| - Working gloves | .20/61/104 |
| Gloves storage box | .20/60/104 |
| Gloves tester | .20/60/104 |
| Guying equipment | .95 |

H

| | |
|--|------------|
| Hacksaw (insulated tools) | .44 |
| Handle for padlocks | .22/67/110 |
| Harness | |
| - Full body fall arrest | .63/106 |
| - Pro electric full body fall arrest | .63/106 |
| Headlamps | |
| - With adjustable focus | .19/59/103 |
| - With leds | .19/59/103 |
| - Atex with leds | .19/59/103 |
| Helmets | |
| - ABS | .18/58/102 |
| - Polycarbonate | .18/58/102 |
| Hexagonal spanner (insulated tools) | .47 |
| Hooks | |
| - Manoeuvring | .92 |
| - Pig tail | .92 |

I

| | |
|---|--------|
| Indicator phase rotation, low voltage | .26 |
| Indicators | |
| - Permanent luminous | .76 |
| - Permanent for medium voltage cubicles | .77 |
| Insulated tools | |
| - Bimaterial insulated tools | .38 |
| - Bimaterial insulated tools kits | .40 |
| - Insulated tools | .41 |
| - Insulated tools kits | .50 |
| Insulating mats | |
| - Low voltage | .21 |
| - Medium voltage | .61 |
| - High voltage | .105 |
| Insulating platforms | |
| - Medium Voltage | .61 |
| - High Voltage | .105 |
| Insulating sticks | |
| - Medium voltage | |
| . Clampsticks | .74/89 |
| . Disconnect telescopic | .89 |
| . Measuring telescopic | .89 |
| . For substation short-circuiting systems | .74 |
| . For overhead lines short circuiting systems | .88 |
| . For voltage detectors | .81 |
| . Rescue stick | .78 |
| - High Voltage | |
| . For short-circuiting systems | .116 |
| . For voltage detectors | .114 |
| . Rescue sticks | .105 |
| Intervention kit (substation equipment) | .71 |
| (for electricians) | .51 |

J

| | |
|--|-----|
| Jumper cables with clamps | .34 |
| Jumper cables with threaded ferrules | .36 |
| Jumper cables with insulated clamps | .37 |
| Jumper connecting box | .37 |

K

| | |
|--------------------------------|---------|
| Kits | |
| - Intervention for substations | .71 |
| - Insulated tools | .50 |
| - For working on pole | .65/108 |

L

| | |
|--|---------|
| Ladders | .66/109 |
| Lamp, safety for substations | .71 |
| Lanyard | .64/107 |
| Life saving kits for substations | .78 |
| Long nose pliers (insulated tools) | .42 |
| Lockout for single pole breaker | .22 |
| Lockout with padlock for single pole breaker | .22 |
| Low voltage complete set | .51 |

M

| | |
|----------------------|------------|
| Markers | .22/67/110 |
| Mats, insulating | .21/61/105 |
| Mechanical adjusters | .94 |
| Mini jumper clamps | .36 |
| Multimeter | .31 |

O

| | |
|------------------------------------|-----|
| Open end spanner (insulated tools) | .47 |
|------------------------------------|-----|

P

| | |
|--|------------|
| Padlocks, safety | .22/67/110 |
| Platform, insulating | |
| - Medium Voltage | .61 |
| - High Voltage | .105 |
| Plug pliers (insulated tools) | .43 |
| Probes | |
| - Contact probes for L.V testers | .27 |
| - Safety test probes for voltage detectors | .27 |
| - Safety test probes for multimeter | .31 |
| Pruning saw | .92 |

R

| | |
|--|---------|
| Ratchet cable cutter (insulated tools) | .44 |
| Ratchet lift-chain hoist | .95 |
| Reel launcher | .118 |
| Rescue sticks | |
| - Medium voltage | .78 |
| - High voltage | .105 |
| Right angle hexagonal key wrench (insulated tools) | .46 |
| Rope | |
| - Safety | .64/107 |
| - Straps with lever stretcher | .63/106 |
| - With energy absorber | .63/106 |
| Round nose pliers (insulated tools) | .39/42 |
| Reversible hexagonal ratchet handle | .46 |

S

| | |
|--|----------|
| Screwdrivers (insulated tools) | .38/41 |
| Short-Circuiting Systems | |
| - Low voltage | |
| . For bare conductors | .32 |
| . For insulated conductors | .33 |
| . For consumer units | .34 |
| . Isostop system | .34 |
| . Equipment for consumer units | .35 |
| - Medium Voltage | |
| . For overhead lines IEC | .85 |
| . For substations IEC | .72 |
| . For substations (for 250 and 400 A connectors) | .75 |
| . For underground cables | .90 |
| - High Voltage | |
| . High voltage systems | .115/116 |
| Shunt telescopic probe | .37 |
| Side cutters (insulated tools) | .39/43 |
| Snap hooks | .64/107 |
| Sockets 3/8" long series (insulated tools) | .49 |
| Sockets 3/8" U.S standard (insulated tools) | .49 |
| Sockets 6 sided Male (insulated tools) | .49 |
| Sockets wrench set (insulated tools) | .48/49 |
| Stepladders, insulating | .21 |
| Stick case | .114 |
| Sticks, Insulating | |
| - Medium voltage | |
| . Clampsticks | .74/89 |
| . Disconnect telescopic | .89 |
| . Measuring telescopic | .89 |
| . For substation short-circuiting systems | .74 |
| . For overhead lines short circuiting systems | .88 |
| . For voltage detectors | .81 |
| High Voltage | |
| . For short circuiting systems | .116 |
| . For voltage detectors | .114 |
| Stripping pliers (insulated tools) | .45 |
| Stripping knives (insulated tools) | .45 |
| Switching devices identifier (L.V.) | .29 |

T

| | |
|-------------------------------------|---------|
| Tap off box | .37 |
| Testers, Low Voltage | |
| - For electrical installations | .29 |
| - For voltage | .25/26 |
| - Earth tester | .30/97 |
| - For insulation | .28 |
| Threaded adapter | .37 |
| Testing device for phase comparator | .82 |
| Tether rope | .64/107 |
| Torch safe light | .71 |
| Torque wrench 3/8", insulated | .49 |
| Trimmer | .92 |

U

| | |
|------------------------------------|--------|
| Universal pliers (insulated tools) | .39/42 |
|------------------------------------|--------|

V

| | |
|---|--------|
| Voltage detector for permanent indicators | .76/77 |
| Voltage detectors | |
| - Low voltage | |
| . Muti-tester | .25 |
| . With phase rotation | .26 |
| - Medium voltage | |
| . Indoor use | .76 |
| . Compact serie | .76 |
| . For separable connectors | .76 |
| . Electronic IEC | .79 |
| . Electronic standard | .80 |
| - High voltage | |
| . Electronic | .113 |

W

| | |
|---|---------|
| Wall mounted supports | .74 |
| Warning signs | |
| - Self adhesive | .24/68 |
| - Low voltage | .23 |
| - Medium voltage | .69 |
| - High voltage | .111 |
| Waterpump pliers (insulated tools) | .39/43 |
| Winches | .94 |
| Wire stripping pliers (insulated tools) | .39/45 |
| Working on pole kits | .65/108 |

The characteristics and technical informations stated in our literature are only for your guidance and therefore cannot be considered as contractual. Our company is entitled to modify at any time the characteristics of its equipments. In case of modification of these characteristics, our company would not be obliged to supply materials conform to those previously in force.

"Alu-Metal, Alu-Script, Catu, Catex, Catohm, Clipblock, Detex, Detex-Lumifix, Isomil, Lowlock, Major, Normafix, Normagrif, Pelican 2, Piezo-Test, Pointest, Snaplock, Triplex" are trade marks of Catu S.A.

Non contractual photographs

| References | Pages |
|-----------------|-----------|
| AC-21 | 23 |
| AC-44 | 23 |
| AD-01 | 23 |
| AL-138 | 23 |
| AL-200 | 22/67/110 |
| AL-201 | 22 |
| AL-201/C | 22 |
| AL-202 | 22/67/110 |
| AL-207/10 | 22/67/110 |
| AL-207/30 | 22/67/110 |
| AL-230 | 51 |
| AL-230-(*)-EX | 22/67/110 |
| AL-230-S-(*)-EX | 22/67/110 |
| AL-230-S-Z-EX | 22/67/110 |
| AL-230-Z-EX | 22/67/110 |
| AL-236-111-EX | 22/67/110 |
| AL-236-222-EX | 22/67/110 |
| AL-236-S-111-EX | 22/67/110 |
| AL-236-S-222-EX | 22/67/110 |
| AL-240-(*)-EX | 22/67/110 |
| AL-240-S-(*)-EX | 22/67/110 |
| AL-240-S-Z-EX | 22/67/110 |
| AL-240-Z-EX | 22/67/110 |
| AL-31 | 23/70/112 |
| AL-31/05 | 23/70/112 |
| AL-31/25 | 23/70/112 |
| AL-316 | 23/70/112 |
| AL-318 | 23/70/112 |
| AL-32/05 | 23/70/112 |
| AL-53 | 70/112 |
| AL-58 | 70/112 |
| AL-60 | 70/112 |
| AL-62-A | 23/70/112 |
| AL-63-A | 23/70/112 |
| AM-20-GB | 23/69/111 |
| AM-20-RM | 69/111 |
| AM-215-RM | 69/111 |
| AM-282/2-RM | 69/111 |
| AM-32/3 | 69/111 |
| AM-33/3 | 69/111 |
| AM-34/2 | 69/111 |
| AM-344 | 23/69/111 |
| AM-344/05 | 23/69/111 |
| AM-344-GB | 23/69/111 |
| AM-345-GB | 23/69/111 |
| AM-41/1 | 23/69/111 |
| AM-41/2 | 23/69/111 |
| AM-467-GB | 23/67/110 |
| AM-49/1 | 23/69/111 |
| AM-49/2 | 23/69/111 |
| AM-61-GB | 69/111 |
| AM-61-RM | 69/111 |
| AM-7002 | 69/111 |
| AP-499/1 | 23/70/112 |
| AP-510-BT-GB | 23 |
| AP-510-GB | 69/111 |
| AP-951/2 | 69/111 |
| AS-404 | 22/67/110 |
| AT-41/025 | 24/68 |
| AT-41/05 | 24/68 |
| AT-41/1 | 24/68 |
| AT-49/025 | 24/68 |
| AT-49/05 | 24/68 |
| AT-49/1 | 24/68 |
| AT-50/025 | 24/68 |
| AT-50/053 | 24/68 |
| AT-50/1 | 24/68 |
| AT-5005 | 23 |
| AT-51/025 | 24/68 |
| AT-51/05 | 24/68 |
| AT-51/1 | 24/68 |
| AT-52/05 | 24/68 |

| References | Pages |
|--------------------|--------------|
| AT-52/1 | 24/68 |
| AT-53/05 | 24/68 |
| AT-53/1 | 24/68 |
| AT-54/05 | 24/68 |
| AT-54/1 | 24/68 |
| AT-55/05 | 24/68 |
| AT-55/1 | 24/68 |
| AT-56/05 | 24/68 |
| AT-56/1 | 24/68 |
| AT-57/05 | 24/68 |
| AT-57/1 | 24/68 |
| AT-58/05 | 24/68 |
| AT-58/1 | 24/68 |
| AT-59/05 | 24/68 |
| AT-59/1 | 24/68 |
| AT-60/05 | 24/68 |
| AT-60/1 | 24/68 |
| AT-61/05 | 24/68 |
| AT-61/1 | 24/68 |
| AT-62/05 | 24/68 |
| AT-62/1 | 24/68 |
| AT-63/05 | 24/68 |
| AT-63/1 | 24/68 |
| AT-66/1 | 24/68 |
| C-92-20 | 82 |
| C-92-492 | 80 |
| CC-151-K | 75/76 |
| CC-245-150/420-K | 113 |
| CC-245-225/420...* | 113 |
| CC-245-225/550-K | 113 |
| CC-245-60/150-K | 113 |
| CC-245-63/90...* | 113 |
| CC-245-63/150-K | 113 |
| CC-245-66/132-K | 113 |
| CC-245-90/225-K | 113 |
| CC-363* | 80 |
| CC-365-101 | 80 |
| CC-45-K | 76 |
| CC-875-10/36* | 79 |
| CC-875-11/33* | 79 |
| CD-103 | 71 |
| CD-104 | 71 |
| CD-122 | 71 |
| CD-124 | 71 |
| CE-4-21* | 74/81 |
| CE-5-105-(*) | 89 |
| CE-5-50-(*) | 89 |
| CE-5-60-(*) | 89 |
| CE-5-70-(*) | 89 |
| CE-5-90-(*) | 89 |
| CE-5-90-C | 65 |
| CE-75* | 81 |
| CF-3-72* | 74 |
| CF-5-40* | 74/88 |
| CF-5-90* | 88 |
| CG-02 (*) | 20 |
| CG-05 (*) | 20 |
| CG-05-B | 51 |
| CG-05-C | 51 |
| CG-10 (*) | 20 |
| CG-10 (*)-AM | 20 |
| CG-117 | 20/60/104 |
| CG-12 (*) | 20 |
| CG-15 (*) | 60 |
| CG-20 (*) | 60 |
| CG-20 (*)-AM | 60 |
| CG-30 (*) | 60/104 |
| CG-30 (*)-AM | 60/104 |
| CG-35/1 | 20/60/104 |
| CG-36 | 20/51/60/104 |
| CG-40 (**) | 104 |
| CG-40 (**)-AM | 104 |

| References | Pages |
|---------------|-----------|
| CG-80 (**) | 20/60/104 |
| CG-96 (*) | 21 |
| CG-97-C | 61/104 |
| CG-98 | 51 |
| CG-98 (*) | 20 |
| CG-99 (*) | 60/104 |
| CI-06-D | 74 |
| CI-10-D | 74 |
| CI-12-D | 74 |
| CL-1-05 | 82 |
| CL-2-10/30-2 | 76 |
| CL-2-5/36-2 | 76 |
| CL-40010 | 76 |
| CL-4-41/2 | 76 |
| CL-495-3 | 77 |
| CL-497-00 | 77 |
| CL-498-00 | 77 |
| CL-499/101 | 77 |
| CL-5-03 | 83 |
| CL-5-33-GB | 83 |
| CL-5-36 | 83 |
| CL-7-06/18* | 83 |
| CL-7-10/30* | 83 |
| CL-7-10/30-1* | 83 |
| CL-7-12/36* | 83 |
| CL-8-05 | 82 |
| CL-8-36 | 82 |
| CL-8-36/1 | 82 |
| CM-02* | 92 |
| CM-1-10 | 89 |
| CM-1-15 | 89 |
| CM-1-20 | 89 |
| CM-3000 | 114 |
| CM-3-03 | 88 |
| CM-3-04 | 88 |
| CM-3-05 | 88 |
| CM-3-06 | 88 |
| CM-04-K | 92 |
| CM-4115-* | 114 |
| CM-4120-* | 114 |
| CM-4125-* | 114 |
| CM-4130-* | 114 |
| CM-4220* | 114 |
| CM-4230* | 114 |
| CM-4240* | 114 |
| CM-4345* | 114 |
| CM-4360* | 114 |
| CM-4400-J | 88 |
| CM-4410 | 88 |
| CM-4410-* | 88 |
| CM-4410-I | 88 |
| CM-4415 | 88 |
| CM-4415-* | 88 |
| CM-4415-I | 88 |
| CM-4420 | 88 |
| CM-4420-* | 88 |
| CM-4420-I | 88 |
| CM-4425 | 88 |
| CM-4425-* | 88 |
| CM-4425-I | 88 |
| CM-4600-J | 114 |
| CM-4610 | 114 |
| CM-4610-* | 114 |
| CM-4610-I | 114 |
| CM-4615 | 114 |
| CM-4615-* | 114 |
| CM-4615-I | 114 |
| CM-4620 | 114 |
| CM-4620-* | 114 |
| CM-4620-I | 114 |
| CM-4625 | 114 |
| CM-4625-* | 114 |

| References | Pages |
|-----------------|--------|
| CM-4625-I | 114 |
| CM-6-15 | 116 |
| CM-6-20 | 116 |
| CM-6-25 | 116 |
| CM-6-30 | 116 |
| CM-7-10-A | 81 |
| COL-32/100 | 97 |
| COL-8/32 | 97 |
| CS-225* | 105 |
| CS-45 | 78 |
| CS-90* | 105 |
| CT-7-25/1 | 61 |
| CT-7-40/1 | 61 |
| CT-7-63 | 105 |
| CT-9-25 | 61 |
| CT-9-45 | 61 |
| CT-9-63 | 105 |
| CX-01222 | 27 |
| CX-01422 | 27 |
| CX-01822 | 27 |
| CX-35811 | 27 |
| CX-45211 | 27 |
| CX-45411 | 27 |
| CX-45511 | 27 |
| CZ-53-MR | 78 |
| CZ-53-MR/2 | 78 |
| CZ-53-R | 78 |
| CZ-53-R/2 | 78 |
| CZ-54-MR | 78 |
| CZ-54-R | 78 |
| CZ-55-MR | 78 |
| CZ-55-R | 78 |
| DT-102 | 29 |
| DT-110 | 29 |
| DT-150 | 29 |
| DT-157 | 29 |
| DT-300 | 30 |
| DT-307 | 30 |
| DT-500 | 28 |
| DX-02001 | 31 |
| DX-02002 | 31 |
| DX-02006 | 27/29 |
| KIT-01* | 71 |
| KIT-03 | 50 |
| KIT-04 | 50 |
| KIT-05 | 50 |
| KIT-07 | 50 |
| KIT-10** | 71 |
| KIT-23 | 40 |
| KIT-24 | 40 |
| KIT-25 | 40 |
| KIT-27 | 40 |
| KIT-ARC-01 | 62 |
| KIT-ARC-02 | 62 |
| KIT-ARC-03 | 62 |
| KIT-ARC-04 | 62 |
| KIT-HAUT-01-(*) | 65/108 |
| KIT-HAUT-02-(*) | 65/108 |
| KIT-HAUT-03-(*) | 65/108 |
| KIT-HAUT-04-(*) | 65/108 |
| KIT-HAUT-05-(*) | 65/108 |
| KIT-HAUT-06-(*) | 65/108 |
| M-24-10 | 84 |
| M-24-120 | 84/117 |
| M-24-120-S | 84/117 |
| M-24-150 | 84/117 |
| M-24-150-S | 84/117 |
| M-24-16 | 84 |
| M-24-16-S | 84 |
| M-24-25 | 84 |
| M-24-25-S | 84 |
| M-24-30 | 84 |

General references index



| References | Pages |
|------------|--------------|
| M-24-35 | 84 |
| M-24-35-S | 84 |
| M-24-40 | 84 |
| M-24-50 | 84 |
| M-24-50-S | 84 |
| M-24-70 | 84/117 |
| M-24-70-S | 84/117 |
| M-24-75 | 84/117 |
| M-24-95 | 84/117 |
| M-24-95-S | 84/117 |
| M-28-120 | 84/117 |
| M-28-150 | 84/117 |
| M-28-50 | 84 |
| M-28-70 | 84/117 |
| M-87-153 | 118 |
| M-87292 | 28/30 |
| M-87-295 | 65/118 |
| M-87369 | 25/26 |
| M-87370 | 50/51 |
| M-87384 | 18/59 |
| M-87386 | 21/61 |
| M-87-53 | 118 |
| M-881622 | 18/58/102 |
| M-881635 | 18 |
| M-92-1172 | 30 |
| M-92-28 | 92 |
| M-95-1143 | 30 |
| M-951735 | 29 |
| M-951736 | 29 |
| M-952271 | 29/30 |
| M-95626/4* | 35 |
| M-95627/4* | 35 |
| M-95-864 | 19/59/71/103 |
| M-95-865 | 19/59/103 |
| MC-116 | 37 |
| MC-120/100 | 37 |
| MC-120/15 | 37 |
| MC-120/50 | 37 |
| MC-121 | 37 |
| MC-122 | 37 |
| MC-123 | 37 |
| MC-124 | 37 |
| MC-126 | 37 |
| MC-126/1 | 37 |
| MC-141 | 36 |
| MC-142 | 35/36 |
| MC-143 | 36 |
| MC-144 | 36 |
| MC-145 | 36 |
| MC-146 | 36 |
| MC-147 | 36 |
| MC-147/1 | 36 |
| MC-148 | 36 |
| MC-148/1 | 36 |
| MC-149 | 36 |
| MC-150 | 37 |
| MC-153/05 | 36 |
| MC-153/10 | 36 |
| MC-153/30 | 36 |
| MC-153/60 | 36 |
| MC-155/05 | 36 |
| MC-155/10 | 36 |
| MC-155/20 | 36 |
| MC-155/30 | 36 |
| MC-155/60 | 36 |
| MC-155/80 | 36 |
| MC-156 | 37 |
| MC-156/1 | 37 |
| MC-161 | 35 |
| MC-165/40 | 34 |
| MC-166/40 | 34 |
| MC-166/60 | 34 |

| References | Pages |
|----------------|--------------|
| MC-175/40 | 34 |
| MC-181 | 37 |
| MC-182 | 37 |
| MC-183 | 37 |
| MC-290/2 | 34 |
| MC-296-00/08* | 35 |
| MC-296-115/08* | 35 |
| MC-296-115/12* | 35 |
| MC-296-160/12* | 35 |
| MC-296-320 | 35 |
| MC-296-440 | 35 |
| MD-02 | 63/106 |
| MD-10-C | 92 |
| MD-12-C | 92 |
| MD-14-C | 92 |
| MD-40-* | 92 |
| MD-42-B | 92 |
| MD-535-K | 92 |
| MF-60 | 118 |
| MF-61 | 118 |
| MF-62 | 118 |
| MF-63 | 118 |
| MF-66 | 118 |
| MG-115/1-S | 74 |
| MG-206-AK | 92 |
| MG-206-CK | 92 |
| MG-207-K | 92 |
| MG-207-S | 92 |
| MG-208-K | 89 |
| MG-352-K | 92 |
| MG-352-VK | 92 |
| MG-353-R | 92 |
| MG-353-V | 92 |
| MG-354-K | 92 |
| MG-355 | 92 |
| MGS-100-S | 89 |
| MGS-103-S | 89 |
| MK-08 | 93 |
| MK-100 | 94 |
| MK-15 | 93 |
| MK-20 | 93 |
| MK-40 | 94 |
| MK-60 | 94 |
| ML-05/10 | 94 |
| ML-08/20* | 94 |
| ML-16/20* | 94 |
| ML-32/20* | 94 |
| MO-052 | 64/107 |
| MO-11000 | 18/58/102 |
| MO-11001 | 18/51/58/102 |
| MO-11010 | 18/58/102 |
| MO-11011 | 18/58/102 |
| MO-16-A | 66 |
| MO-17-A | 66 |
| MO-182/1-B | 18/58/102 |
| MO-182/1-R | 18/58/102 |
| MO-183-BL | 18/58/102 |
| MO-183-RL | 18/58/102 |
| MO-184 | 18/58/102 |
| MO-185-B | 18/58/102 |
| MO-185-BL | 18/58/102 |
| MO-185-J | 18/58/102 |
| MO-185-R | 18/58/102 |
| MO-186 | 18 |
| MO-23 | 66 |
| MO-237-D | 37 |
| MO-24 | 66 |
| MO-25 | 66 |
| MO-26 | 66 |
| MO-308 | 95 |
| MO-331/04-B | 94 |
| MO-331/06-A | 94 |

| References | Pages |
|--------------|-----------|
| MO-331/08-B | 94 |
| MO-331/09-A | 94 |
| MO-331/10-B | 94 |
| MO-331/12-A | 94 |
| MO-331/13-P | 93/94 |
| MO-331/16-B | 94 |
| MO-331/22-P | 93 |
| MO-331/26-B | 94 |
| MO-331/38-P | 93 |
| MO-332/09-D | 93 |
| MO-332/13-E | 93 |
| MO-332/14-D | 93 |
| MO-332/18-E | 93 |
| MO-332/22-E | 93 |
| MO-337/06 | 93 |
| MO-339/02 | 93 |
| MO-339/03 | 93 |
| MO-34 | 50 |
| MO-35 | 66 |
| MO-371/01 | 95 |
| MO-371/100 | 95 |
| MO-375/150 | 95 |
| MO-375/250 | 95 |
| MO-375/300 | 95 |
| MO-375/400 | 95 |
| MO-375/600 | 95 |
| MO-375/800 | 95 |
| MO-431/07 | 95 |
| MO-431/15 | 95 |
| MO-431/30 | 95 |
| MO-435/07 | 95 |
| MO-435/15 | 95 |
| MO-510-03-EX | 51 |
| MO-52020 | 63/65/106 |
| MO-52021 | 63/106 |
| MO-52031 | 65/108 |
| MO-52033 | 65/108 |
| MO-52034 | 65/108 |
| MO-52-L | 63/106 |
| MO-53 | 64/107 |
| MO-54 | 64/65/107 |
| MO-54000 | 64/107 |
| MO-54002 | 64/107 |
| MO-54004 | 64/107 |
| MO-54005 | 65 |
| MO-54010 | 63/65/106 |
| MO-55/1 | 64/107 |
| MO-56009 | 64/65/107 |
| MO-56010 | 64/107 |
| MO-563 | 65 |
| MO-563(*) | 63/106 |
| MO-564 | 65 |
| MO-564(*) | 63/106 |
| MO-591000 | 65/108 |
| MO-591002 | 64/107 |
| MO-61001 | 45/51 |
| MO-61002 | 45 |
| MO-64502 | 44 |
| MO-65203 | 41 |
| MO-65204 | 41/50/51 |
| MO-65205 | 41/51 |
| MO-65206 | 41/50/51 |
| MO-65207 | 41/51 |
| MO-65209 | 41/50/51 |
| MO-65211 | 41 |
| MO-65222 | 41 |
| MO-65230 | 41 |
| MO-65232 | 41/51 |
| MO-65234 | 41/51 |
| MO-65236 | 41/51 |
| MO-65238 | 41 |
| MO-65240 | 41 |

| References | Pages |
|-------------|-----------|
| MO-65242 | 41/50/51 |
| MO-65244 | 41/50/51 |
| MO-65246 | 41 |
| MO-65248 | 41 |
| MO-66001 | 42 |
| MO-66002 | 42/50/51 |
| MO-66003 | 42 |
| MO-66005* | 42 |
| MO-66102 | 42 |
| MO-66105 | 43 |
| MO-66202 | 42/51 |
| MO-66300 | 42 |
| MO-66302 | 42 |
| MO-66402 | 42/50/51 |
| MO-66404 | 42 |
| MO-66502 | 43/50/51 |
| MO-66505 | 43 |
| MO-67101 | 43 |
| MO-67102 | 43/51 |
| MO-67103 | 43 |
| MO-67302 | 45/50/51 |
| MO-67304 | 45 |
| MO-67305 | 45 |
| MO-67306 | 45 |
| MO-67401 | 43 |
| MO-67402 | 43 |
| MO-67404 | 43 |
| MO-67500 | 43/50/51 |
| MO-67501 | 44 |
| MO-67502 | 44/51 |
| MO-67599 | 44 |
| MO-67600 | 44 |
| MO-67601 | 44 |
| MO-67611 | 44 |
| MO-68/10 | 63/106 |
| MO-68/15 | 63/65/106 |
| MO-68008 | 47 |
| MO-68008/19 | 47/51 |
| MO-68009 | 47 |
| MO-68010 | 47 |
| MO-68011 | 47 |
| MO-68012 | 47 |
| MO-68013 | 47 |
| MO-68014 | 47 |
| MO-68015 | 47 |
| MO-68016 | 47 |
| MO-68017 | 47 |
| MO-68018 | 47 |
| MO-68019 | 47 |
| MO-68020 | 47 |
| MO-68021 | 47 |
| MO-68022 | 47 |
| MO-68023 | 47 |
| MO-68024 | 47 |
| MO-68025 | 47 |
| MO-68026 | 47 |
| MO-68027 | 47 |
| MO-68028 | 47 |
| MO-68029 | 47 |
| MO-68030 | 47 |
| MO-68032 | 47 |
| MO-68107 | 47 |
| MO-68108 | 47 |
| MO-68109 | 47 |
| MO-68110 | 47 |
| MO-68111 | 47 |
| MO-68112 | 47 |
| MO-68113 | 47 |
| MO-68114 | 47 |
| MO-68115 | 47 |
| MO-68116 | 47 |
| MO-68117 | 47 |

| References | Pages |
|-------------|-------|
| MO-68118 | 47 |
| MO-68119 | 47 |
| MO-68120 | 47 |
| MO-68121 | 47 |
| MO-68122 | 47 |
| MO-68123 | 47 |
| MO-68124 | 47 |
| MO-68125 | 47 |
| MO-68126 | 47 |
| MO-68127 | 47 |
| MO-68128 | 47 |
| MO-68129 | 47 |
| MO-68130 | 47 |
| MO-68132 | 47 |
| MO-68610 | 47 |
| MO-68613 | 47 |
| MO-68614 | 47 |
| MO-68701 | 46 |
| MO-68702 | 46 |
| MO-68703 | 46 |
| MO-68704 | 46 |
| MO-69002 | 46 |
| MO-69003 | 46/51 |
| MO-69004 | 46 |
| MO-69005 | 46 |
| MO-69050 | 49 |
| MO-69210 | 46 |
| MO-69213 | 46 |
| MO-69216 | 46 |
| MO-69217 | 46 |
| MO-69218 | 46 |
| MO-69219 | 46 |
| MO-69306 | 48 |
| MO-69307 | 48 |
| MO-69308* | 48 |
| MO-69308/23 | 48/51 |
| MO-69309 | 48 |
| MO-69310* | 48 |
| MO-693100 | 49 |
| MO-69311 | 48 |
| MO-69312* | 48 |
| MO-69313* | 48 |
| MO-69314* | 48 |
| MO-69315 | 48 |
| MO-69316 | 48 |
| MO-69317 | 49 |
| MO-69317* | 48 |
| MO-69318 | 48 |
| MO-69319* | 48 |
| MO-69321* | 48 |
| MO-69322* | 48 |
| MO-69323* | 48 |
| MO-69393 | 49 |
| MO-69394 | 49 |
| MO-69395 | 49 |
| MO-69396 | 49 |
| MO-69397 | 49 |
| MO-69398 | 49 |
| MO-69408* | 48 |
| MO-69408/23 | 48 |
| MO-69410* | 48 |
| MO-69411 | 48 |
| MO-69412* | 48 |
| MO-69413* | 48 |
| MO-69414* | 48 |
| MO-69415 | 48 |
| MO-69416 | 48 |
| MO-69417 | 48 |
| MO-69418 | 48 |
| MO-69419* | 48 |
| MO-69420 | 48 |
| MO-69421* | 48 |

| References | Pages |
|--------------|-----------|
| MO-69422* | 48 |
| MO-69423* | 48 |
| MO-69424 | 48 |
| MO-69430 | 48 |
| MO-69512 | 49 |
| MO-69513* | 48 |
| MO-69514* | 48 |
| MO-69523* | 48 |
| MO-69524* | 48 |
| MO-69533 | 48 |
| MO-69534 | 48 |
| MO-69542 | 48 |
| MO-69543 | 48 |
| MO-69544 | 48 |
| MO-69610 | 49 |
| MO-69613 | 49 |
| MO-69614 | 49 |
| MO-69616 | 49 |
| MO-69617 | 49 |
| MO-69618 | 49 |
| MO-69619 | 49 |
| MO-69621 | 49 |
| MO-69735 | 49 |
| MO-69736 | 49 |
| MO-69737 | 49 |
| MO-69738 | 49 |
| MO-69739 | 49 |
| MO-69740 | 49 |
| MO-69741 | 49 |
| MO-69742 | 49 |
| MO-69810 | 49 |
| MO-69810/17 | 49 |
| MO-69813 | 49 |
| MO-69813/17 | 49 |
| MO-69840 | 49 |
| MO-69903 | 46/51 |
| MO-69904 | 46/51 |
| MO-69905 | 46 |
| MO-69906 | 46/51 |
| MO-69908 | 46 |
| MO-69910 | 46 |
| MO-69912 | 46 |
| MO-71 | 63/65/106 |
| MO-72003 | 38 |
| MO-72004 | 38/40 |
| MO-72005 | 38 |
| MO-72006 | 38/40 |
| MO-72007 | 38 |
| MO-72009 | 38/40 |
| MO-72040 | 38 |
| MO-72042 | 38/40 |
| MO-72044 | 38/40 |
| MO-72046 | 38 |
| MO-72100 | 45 |
| MO-72102 | 39/40 |
| MO-72122 | 39 |
| MO-72132 | 39 |
| MO-72142 | 39/40 |
| MO-72155 | 39/40 |
| MO-72162 | 39 |
| MO-72172 | 39/40 |
| MO-72200 | 39/40 |
| MO-751 | 51 |
| MO-832 | 89 |
| MP-01 | 21/61 |
| MP-02 | 21/61 |
| MP-100/03-10 | 21/61 |
| MP-100/03-5 | 21/61 |
| MP-100/05-10 | 61 |
| MP-100/05-5 | 61 |
| MP-100/10-10 | 105 |
| MP-100/10-5 | 105 |

| References | Pages |
|-------------|--------------|
| MP-19 | 51 |
| MP-211 | 90 |
| MP-212 | 90 |
| MP-26-A | 51 |
| MP-311 | 95 |
| MP-315 | 95 |
| MP-32/15 | 51 |
| MP-35/12 | 51 |
| MP-39 | 51 |
| MP-42/11 | 21/61 |
| MP-42/16 | 21/51/61 |
| MP-42/66 | 21/61 |
| MP-506/2 | 66/109 |
| MP-508/2 | 66/109 |
| MP-510/2 | 66/109 |
| MP-514/2 | 66/109 |
| MP-515/2 | 66/109 |
| MP-60/03-10 | 21/61 |
| MP-60/03-5 | 21/61 |
| MP-60/05-10 | 61 |
| MP-60/05-5 | 61 |
| MP-60/10-10 | 105 |
| MP-60/10-5 | 105 |
| MP-700-1 | 21 |
| MP-700-2 | 21 |
| MP-700-3 | 21 |
| MP-700-4 | 21 |
| MP-700-5 | 21 |
| MS-115-1 | 71 |
| MS-118 | 19/59/103 |
| MS-121 | 19/59/103 |
| MS-126 | 19/59/71/103 |
| MS-127 | 19/59/103 |
| MS-152+ | 26 |
| MS-62 | 27 |
| MS-63 | 27 |
| MS-8013 | 27 |
| MS-8014 | 27 |
| MS-911/2 | 26 |
| MS-911-EX | 25/51 |
| MT-1910 | 72 |
| MT-1911 | 73 |
| MT-1911-E | 73 |
| MT-1911-S1 | 73 |
| MT-1920 | 72 |
| MT-1921 | 73 |
| MT-1921-E | 73 |
| MT-1921-S1 | 73 |
| MT-205 | 33 |
| MT-206 | 33 |
| MT-207 | 33 |
| MT-245 | 33 |
| MT-249 | 33 |
| MT-2950/35* | 73 |
| MT-2951 | 73 |
| MT-2951/1 | 73 |
| MT-2951/2 | 73 |
| MT-315/2 | 34 |
| MT-3950/35* | 73 |
| MT-3951 | 73 |
| MT-3951/1 | 73 |
| MT-3952 | 73 |
| MT-3952/1 | 73 |
| MT-404 | 32 |
| MT-405 | 32 |
| MT-406 | 32 |
| MT-407 | 32 |
| MT-508/36 | 87 |
| MT-508/46 | 87 |
| MT-5805 | 72 |
| MT-613 | 85 |
| MT-613/1 | 85 |

| References | Pages |
|----------------|--------|
| MT-613/2 | 85 |
| MT-615/1-7,5 | 32 |
| MT-615/2-7,5 | 32 |
| MT-630-C | 86 |
| MT-630-K | 86 |
| MT-630-S | 86 |
| MT-633-C | 86 |
| MT-633-K | 86 |
| MT-633-S | 86 |
| MT-634-C/K | 86 |
| MT-635/1-C/K/S | 86 |
| MT-640-S | 86 |
| MT-641-S | 86 |
| MT-650 | 33/86 |
| MT-652/10 | 86 |
| MT-652/15 | 86 |
| MT-6613 | 85 |
| MT-6613/1 | 85 |
| MT-701/1 | 118 |
| MT-708/40 | 118 |
| MT-709-B | 118 |
| MT-731* | 115 |
| MT-732* | 115 |
| MT-734* | 115 |
| MT-735* | 115 |
| MT-737* | 115 |
| MT-790 | 117 |
| MT-792 | 117 |
| MT-797 | 117 |
| MT-812-C | 73 |
| MT-813-C | 73 |
| MT-814/2 | 73 |
| MT-814/3 | 73 |
| MT-815-C | 73 |
| MT-815-E | 73 |
| MT-815-S | 73 |
| MT-815-S1 | 73 |
| MT-817-C | 73 |
| MT-840/1 | 73/86 |
| MT-841 | 73 |
| MT-843 | 86/116 |
| MT-847 | 116 |
| MT-852 | 116 |
| MT-853 | 116 |
| MT-8612 | 75 |
| MT-8614 | 75 |
| MT-895 | 117 |
| MT-9801 | 72 |
| MV-135* | 21/61 |
| MX-300 | 29 |
| MX-404 | 77 |
| MX-430-M | 97 |
| MX-433-T | 97 |
| MX-701 | 31 |
| MX-702 | 31 |
| TO-2-16 | 96 |
| TO-2-19 | 96 |
| TO-3-16/19 | 96 |
| TP-1610-R | 96 |
| TP-1615-R | 96 |
| TP-1620-R | 96 |
| TP-1910-R | 96 |
| TP-1915-R | 96 |
| TP-1920-R | 96 |
| TR-116-10 | 96 |
| TR-116-15 | 96 |
| TR-119-10 | 96 |
| TR-119-15 | 96 |
| TR-119-20 | 96 |
| TR-1610 | 96 |
| TR-1615 | 96 |
| TR-1620 | 96 |
| TR-1910 | 96 |
| TR-1915 | 96 |
| TR-1920 | 96 |
| TS-1601 | 96 |
| TS-1901 | 96 |

IEC Standard



International Electrotechnical Commission is a worldwide organization for standardization comprising national electrotechnical committees (NC). The object of the IEC is to promote international cooperation on all questions concerning standardization in the electrical fields. These standard have been approved by more than 50 different countries including Australia, Canada, China, France, Germany, Japan, Russia, Malaysia, Singapore, Mexico, India, Indonesia, South Africa, New Zealand, USA...

A rapid need to perform electrical operations evolved with the time. This resulted in regional or national working on specific standards without coordination.

IEC standards were developed according to a consensus procedure and approved by recognised body. They provide an adequate answer at worldwide level.

The IEC standard presents benefits to all parties involved:

- for the end-users: it is the guarantee of a suitable and internationally recognized quality equipment,
- for the Testing Laboratories: it determines better standards of testing and control procedures for materials,
- for the manufacturers: it helps them to make a better technico-commercial offer.

Designs, tests and manufactures under the IEC requirements.

Is the first manufacturer to provide a full range of products complying with the IEC standards.

Shows its innovation ability for the welfare of the electrical world.



CATU™

Golden safety rules



Electrical accidents are responsible for severe body injuries, which cause troubles not only for the workers themselves, but for their families as well.

Furthermore they cause financial penalties to the utilities, due to the failure of supply and the cost associated with the injured workers.

How does the electrical risk appears?

- When an electrical line or conductor is unexpectedly still live
- When current sources are not properly isolated
- When power generators are connected to the network
- When there are atmospheric phenomena such as lightning
- Through induced currents

However, it has also been statistically observed that the most common causes of unexpected presence of voltage on electrical lines or installations were due to:

- A mistake in operating a switch
- A mistake in identifying the work to perform
- A "faulty" switch (one of the links for example remaining partially engaged)

How to avoid electrical accidents?

1. By observing Simple Electrical Safety Rules directed by common Sense (even if Working Practices vary from a country to another, GOLDEN RULES always apply).
2. By using Simple, Light and Reliable Electrical Safety Equipment.

First, select the right equipment

Personal protective equipment, safety padlock, voltage detector, short circuiting and earthing system, warning signs.



Golden safety rules

SEPARATE THE WORK AREA FROM ALL POSSIBLE SOURCES OF POWER-SUPPLY by opening circuit-breakers, switches...

1



2

LOCK THE LINK IN THE OPEN POSITION with a safety lock system (safety padlock)

CHECK THE ABSENCE OF VOLTAGE at source and on site, on each conductor and apparatus involved.

3



4

APPLY APPROPRIATE SHORT-CIRCUIT AND EARTHING SYSTEMS in sufficient numbers on the conductors of your network where operation is taking place.

SHOWN, WARN OTHERS AND LIMIT THE WORK AREA even during the most simple temporary maintenance operation

5



Low voltage product display



Protective equipment

Warning signs

Safety padlocks

Voltage detectors


Insulated tools 1000V

The major products are now at your electrical dealer's

Low voltage



Below 1000 V

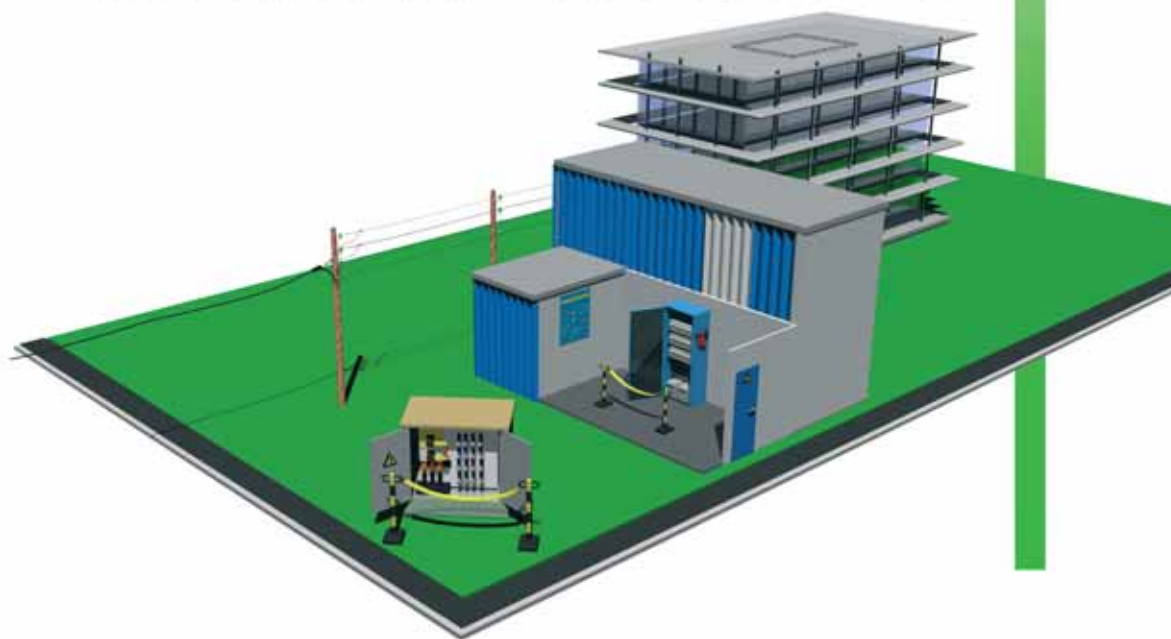

Equipment guide

14

Personal protective equipment

18

Safety padlocks and warning signs

22

Voltage detectors and testers

25

Installation testers

28

Short-circuiting and earthing systems

32

Bimaterial insulated tools

38

Insulated tools

41



LOW VOLTAGE

Examples of usual applications



Home and Building

Since 30 years, CATU has developed a full range of products especially designed for home and building electricians: self adhesive warning signs, personal protective equipment, voltage detectors, installation testers, insulated tools.

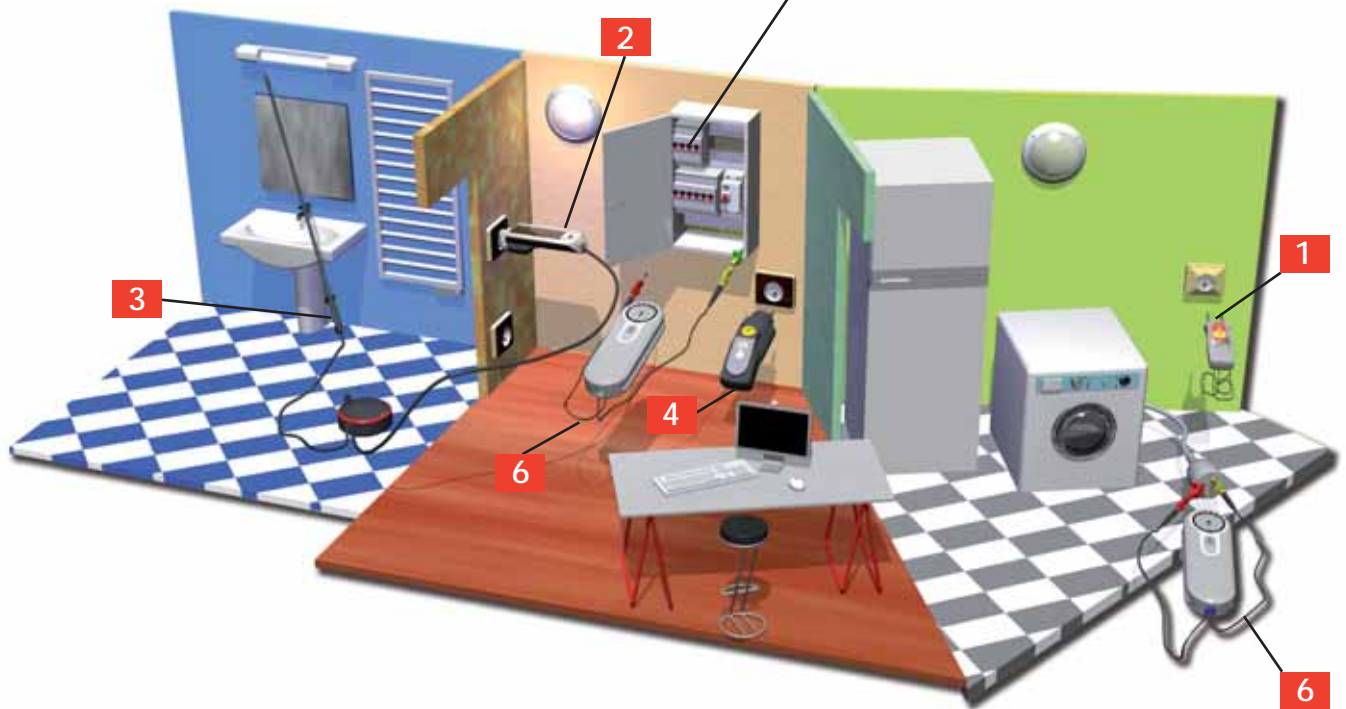

Voltage detector

| | | | |
|----------|---|----------------------|----------|
| 1 | Bipolar voltage detector 6 to 690 V a.c. / d.c. | Reference: MS-911-EX | Page: 25 |
|----------|---|----------------------|----------|

Installation testers and accessories

| | | | |
|----------|---|----------------------|----------|
| 2 | Earth and continuity loop controller "CATOHM" | Reference: DT-300 | Page: 30 |
| 3 | Small 2 parts pole for working at distance | Reference: M-95-1143 | Page: 30 |
| 4 | Electrical installation tester 30 and 500 mA "CATEX Pocket" | Reference: DT-110 | Page: 29 |
| 5 | Electrical installation tester 30, 300, 500, 650 mA "CATEX Pro" | Reference: DT-150 | Page: 29 |
| 6 | Insulation Tester | Reference: DT-500 | Page: 28 |
| 7 | Protection and switching devices on L.V. panel | Reference: MX-300 | Page: 29 |
| 8 | Phase order indicator | Reference: MS-152+ | Page: 26 |

Low voltage


APPLICATIONS

Before intervention select the right personal protective equipment

Industry



The full range of our installation testers can fit on any kind of sockets: french, german, U.K., Italian, US.....

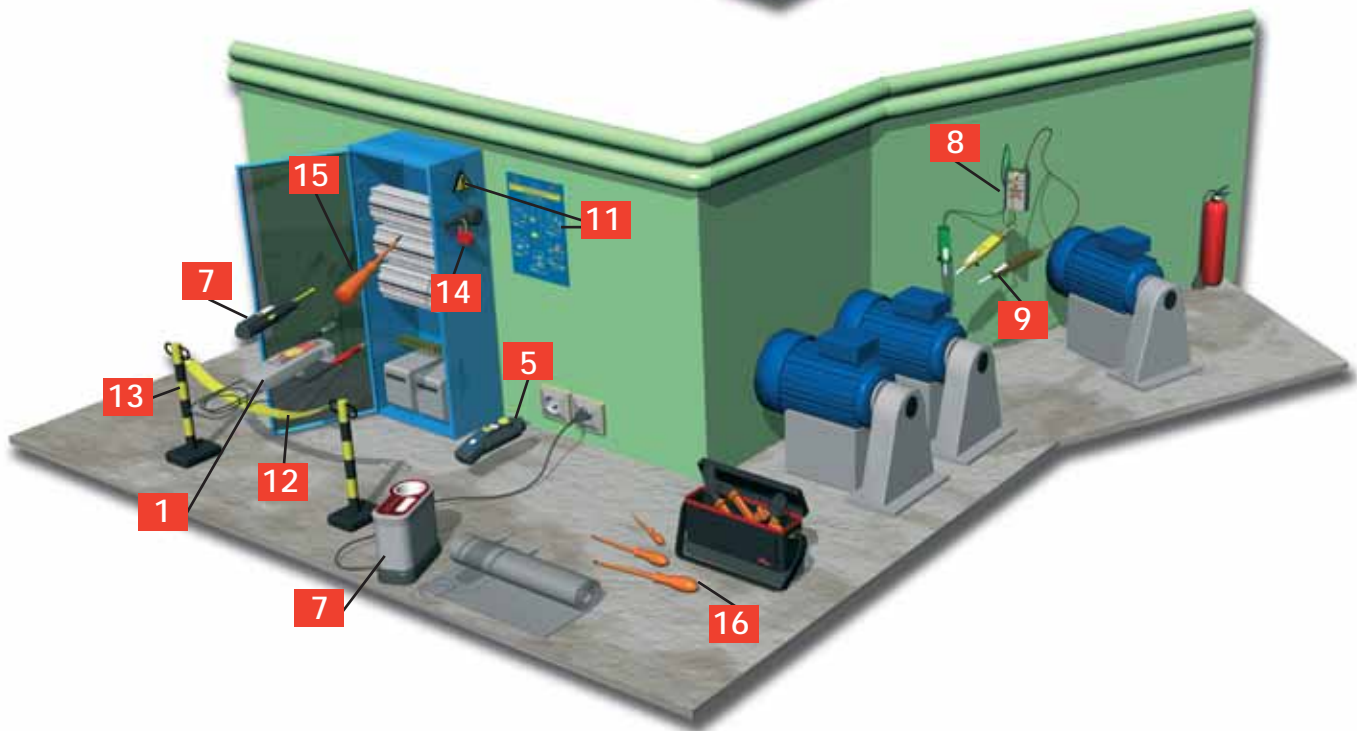

Installation testers and accessories

9 Safety test probes IP2X for controllers Reference: CX- (serie) Page: 27

Warning signs, safety padlocks and delineators

10 Single pole breaker lockout with padlock Reference: AL-201/C Page: 22

11 Warning signs aluminium or self adhesive Pages: 23/24

12 Chain delineator Reference: AL-63-A Page: 23

13 Safety boundary post Reference: AL-318 Page: 23

14 Safety padlock Reference: AL-230/.. Page: 22


Insulated tools

15 Phase tester insulated screwdriver IEC-60900 1000 V Reference: MO-65222 Page: 41

16 Insulated screwdriver, pliers and accessories IEC-60900 1000 V Pages: 38 to 51

Low voltage

Examples of usual applications

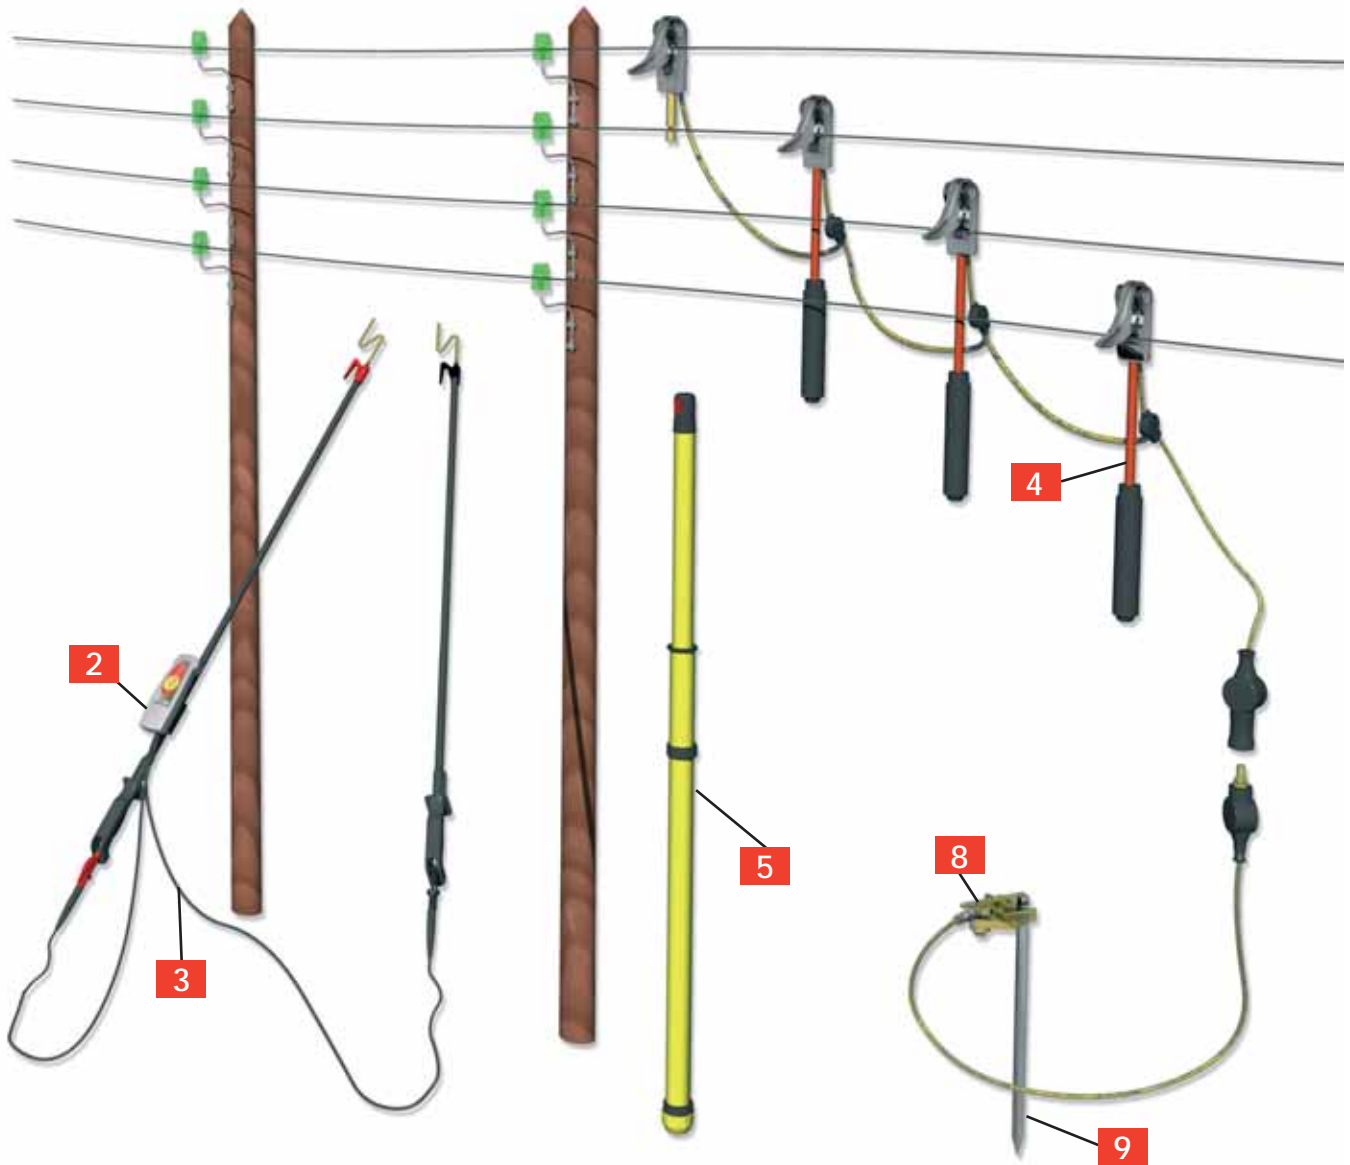


Voltage detectors

- | | | |
|----------|--|----------|
| 1 | Bipolar voltage detector with phase rotation 12 to 400 V a.c. / d.c. Reference: MS-911/2 | Page: 26 |
| 2 | Bipolar voltage detector 6 to 690 V a.c. / d.c. Reference: MS-911-EX | Page: 25 |
| 3 | Contact probes for use on bare overhead line length: 1.2 m Reference: MS-8014 | Page: 27 |

Short-circuiting Systems

- | | | |
|----------|--|----------|
| 4 | Short-circuiting system for bare overhead line with snapping system Reference: MT-405 | Page: 32 |
| 5 | Insulating stick for short-circuiting bare overhead line system Reference: CE-2-21-C | Page: 32 |
| 6 | Short-circuiting system for insulated overhead line (sockets system) Reference: MT-205 | Page: 33 |
| 7 | Short-circuiting and earthing systems for consumer units Reference: MC-290 | Page: 34 |

Before intervention select the right personal protective equipment

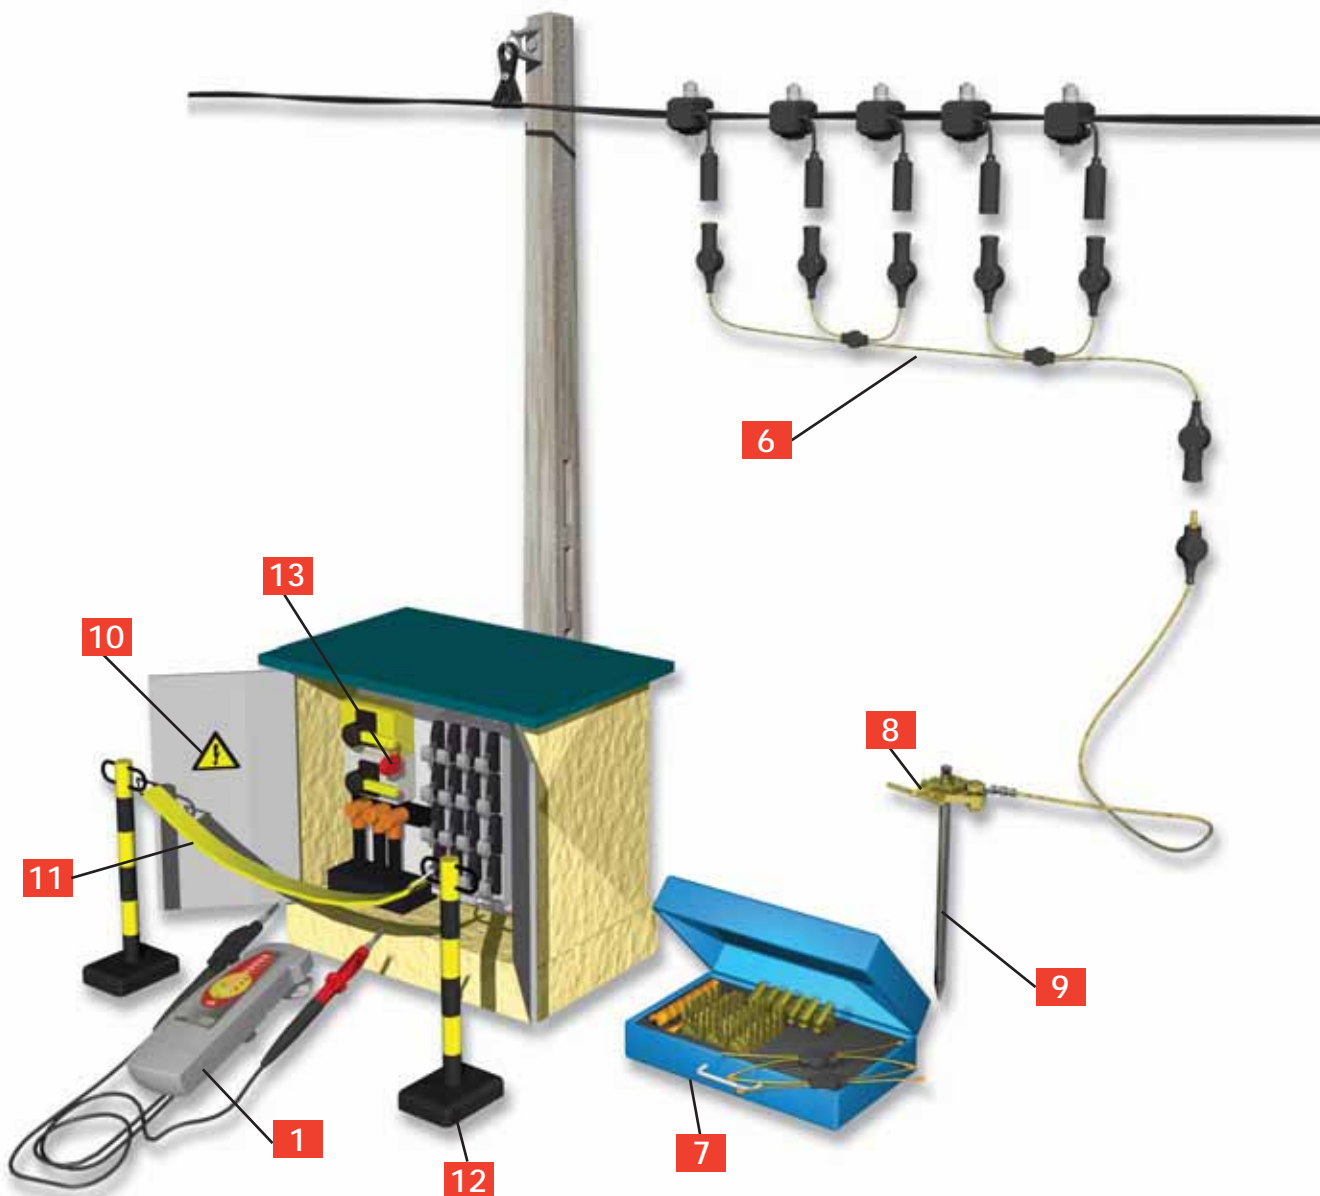

Earthing systems

| | | | |
|----------|---|-------------------|----------|
| 8 | Earthing equipment with cable and earth clamp | Reference: MT-245 | Page: 33 |
| 9 | Hexagonal earth rod length: 1 m | Reference: MT-650 | Page: 33 |

Safety padlocks and warning signs

| | | | |
|-----------|--|----------------------|--------------|
| 10 | Warning signs aluminium or self adhesive | | Pages: 23/24 |
| 11 | Chain delineator | Reference: AL-63-A | Page: 23 |
| 12 | Safety boundary post | Reference: AL-318 | Page: 23 |
| 13 | Safety padlock | Reference: AL-230/.. | Page: 22 |

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-11000 Clear lenses, delivered in pouch
- MO-11001 Tinted lenses, delivered in pouch

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-11010 Clear lenses
- MO-11011 Green tinted lenses

ABS helmet

Electrically insulating helmets for use on voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit - headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg.

EN 397
EN 50365
ANSI Z89.1:2003
Class E 20 kV
CE



- MO-182/1-B White
- MO-182/1-R Red

Face shield

Polycarbonate face shield adjustable on the head by milled wheel. Protection against electric arcs of short-circuits. Anti-condensation treatment. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-186 Single size, adjustable
- M-881635 Spare face shield for MO-186
- M-87384 Bag for face shield and helmet

Face shield

Face shield adjustable on MO -182 helmet. 100% UV protection. Weight: 0.170 kg. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-184 Single size, adjustable by rubber band

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg.

EN 166/EN 170/EN 397
EN 50365
CE



- MO-185-BL White
- MO-185-R Red
- MO-185-J Yellow
- MO-185-B Blue
- M-881622 Spare face shield for MO-185

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0,465 Kg.

EN 397
CE



- MO-183-BL White, single size, adjustable
- MO-183-RL Red, single size, adjustable

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet.
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.

CE



MS-118 Headlamp - Weight: 0.187 kg

M-95-865 Halogen bulb (sold by set of 5 units)
5.2 V 0.5 A

M-95-864 Hooks set for helmet

LED's Headlamp (3 LED's)

Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance LEDs.
- 3 lighting levels.
- Adjustable lamp height angle.
- Very light, waterproof IP65.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 80 hours.

CE



MS-121 Delivered with batteries and a carrying bag
Weight: 0.09 Kg

M-95-864 Hooks set for helmet

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's).
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting.
IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.

CE



MS-127 Delivered with batteries and a carrying bag
Weight: 226 g

M-95-864 Hooks set for helmet

Intrinsically safe ATEX LED's Headlamp

II 2GD EEx ia IIC T4
Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).

CE



MS-126 Delivered with batteries - Weight: 0,125Kg

M-95-864 Hooks set for helmet

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard. To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter. The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set. Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.



IEC-60903
CE

| Reference | Class | Voltage (V) | Thickness (mm) | Designation | Weight (g) |
|--------------|-------|-------------|----------------|--|------------|
| CG-02 (*) | 00 | 500 | 1.7 | orange composite gloves with mechanical properties | 270 |
| CG-05 (*) | 00 | 500 | 0.5 | latex | 90 |
| CG-10 (*) | 0 | 1000 | 1.0 | latex | 200 |
| CG-10 (*)-AM | 0 | 1000 | 1.0 | two color latex rolled edge | 210 |
| CG-12 (*) | 0 | 1000 | 2.3 | orange composite gloves with mechanical properties | 450 |

* References to be completed by size A, B, C, D. Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11.

Undergloves

Cotton undergloves To be used with insulating rubber gloves.



CE

CG-80 (**) ** H: men / F: women

Pneumatic glove tester

For compulsory control of gloves before use. Checking is done by inflating and immersing in water.



Overgloves

Used as outer glove. Silicon grain leather, very flexible. Large protective cuff in chrome tanned hide. Adhesive strap.



EN 388
CE

CG-98 (*) Weight: 0.170 kg

* Add size: A, B, C, D.

Carrying bag

Made from reinforced waterproof fabric for transport of rubber gloves in vehicles and tool boxes. Rear loop for belt and snaps.



CG-36 60 x 180 x 400 mm - Weight: 0.120 kg

Rubber gloves storage box with window

To be placed in high voltage stations. Insulating material, shock resistant, yellow colour. Transparent window (enables to check gloves presence). Bottle of talc included. Attachment: 4 holes 3.5 mm dia., centre distances 155 x 345 mm. U.V. protection window.



CG-35/1 60 x 210 x 460 mm - Weight: 0.730 kg

Low voltage

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Working gloves

All-grain leather, welt sewn, shirred elastic wrist back.



EN 388
CE

CG-96 (*)

Weight: 0.115 kg

* Add size: A, B, C, D.

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11

Insulating boots

Made from elastomer canvas support, very flexible and resistant. Anti-perforation stainless steel sole and shell. Anti-slip sole. Protection against step and touch hazardous potential gradients.



EN 345

MV-135*

60 x 210 x 460 mm - Weight: 0.730 kg

* Add sizes: 39-40/41-42-43/44-45-46/47

Insulating stepladders

A complete range with top quality features:
Insulation between two steps: 30 000 V
Lateral risers in polyester/fiberglass
Aluminium alloy rungs with anti-slip coating.



EN 131

| Reference | Nbr. of steps | Foot rest height (m) | Reach height (m) | Weight (kg) |
|-----------|---------------|----------------------|------------------|-------------|
| MP-700-4 | 3 | 0.68 | 2.68 | 5.9 |
| MP-700-1 | 4 | 0.91 | 2.81 | 6.9 |
| MP-700-2 | 5 | 1.14 | 3.04 | 8.0 |
| MP-700-3 | 6 | 1.37 | 3.27 | 9.4 |
| MP-700-5 | 7 | 1.60 | 3.50 | 11 |

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.

IEC-61111
EN 61111
CE



Individual models.

| Reference | Thickness (mm) | Class | Voltage (kV) | Dimensions (m) |
|-----------|----------------|-------|--------------|----------------|
| MP-42/11 | 3 | 3 | ≤ 26.5 | 1 x 1 |
| MP-42/16 | 3 | 3 | ≤ 26.5 | 0.6 x 1 |
| MP-42/66 | 3 | 3 | ≤ 26.5 | 0.6 x 0.6 |

For placing in front of panels.

| Reference | Thickness (mm) | Class | Voltage (kV) | Dimensions (m) |
|--------------|----------------|-------|--------------|----------------|
| MP-60/03-5 | 3 | 3 | ≤ 26.5 | 0.6 x 5 |
| MP-60/03-10 | 3 | 3 | ≤ 26.5 | 0.6 x 10 |
| MP-100/03-5 | 3 | 3 | ≤ 26.5 | 1 x 5 |
| MP-100/03-10 | 3 | 3 | ≤ 26.5 | 1 x 10 |

Bags for insulating mats

Specially designed for carrying and protecting insulating mats. Equipped with a shoulder strap and a plastic window for instructions and storage identification.



MP-01

For MP-42/16 and MP-42/66 length: 70 cm

MP-02

For MP-42/11 length: 110 cm

Multi-pockets electrician bag

Specially designed for carrying and protecting insulating mats, face shield and controllers. Equipped with several pockets.



M-87386

65 x 15 x 25 cm

Single pole breaker lockout

Clipblock™, locks lever in off position to isolate and prevent breaker use. Clipblock fits most of standard single pole devices. Quick installation with a flat blade screwdriver N°3 (MO-65203).



AL-201 Delivered in Pack of 5 units

Single pole breaker lockout with padlock

Clipblock™, locks lever in off position to isolate and prevent breaker use. Clipblock fits most of standard single pole devices. Quick installation with a flat blade screwdriver N°3 (MO-65203). Locked by padlock.



AL-201/C Delivered with a padlock

Padlocks with warning signs

Brass ring bow 50 or 70 mm.
Diameter of the ring bow 4 or 6 mm.



| Reference | Ring bow (mm) | Ø (mm) | Weight (kg) |
|-----------------|---------------|--------|-------------|
| AL-230-(*)-EX | 50 | 6 | 0.170 |
| AL-230-S-(*)-EX | 70 | 6 | 0.190 |
| AL-230-Z-EX | 50 | 6 | 0.170 |
| AL-230-S-Z-EX | 70 | 6 | 0.190 |
| AL-240-(*)-EX | 50 | 4 | 0.170 |
| AL-240-S-(*)-EX | 70 | 4 | 0.190 |
| AL-240-Z-EX | 50 | 4 | 0.170 |
| AL-240-S-Z-EX | 70 | 4 | 0.190 |

* Add n° of key: 111 or 222
 *00 n° standard key: n° of key upon request
 Z: random n° of key

Handle with 6 padlocks

Handle of moulded plastic for holding up to six padlocks. Compartment with transparent cover for key storage.



| Reference | Weight (kg) | Handle with 6 padlocks |
|-----------------|-------------|------------------------|
| AL-236-111-EX | 1.150 | AL-230-111-EX |
| AL-236-S-111-EX | 1.210 | AL-230-S-111-EX |
| AL-236-222-EX | 1.150 | AL-230-222-EX |
| AL-236-S-222-EX | 1.210 | AL-230-S-222-EX |

Multiple locking apparatus

Holds up to four padlocks and a sign.



| | |
|---------------|-------------------------------------|
| AL-200 | 100 x 60 x 10 mm - Weight: 0.150 kg |
| AL-202 | 165 x 50 x 12 mm - Weight: 0.200 kg |

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



| | |
|------------------|------------------------------------|
| AL-207/10 | For 10 padlocks - Weight: 0.06 kg |
| AL-207/30 | For 30 padlocks - Weight: 0.130 kg |

Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.



AS-404 4 markers in assorted colors (red, black, blue and green)

Padlocks

Warning signs and delineators

Warning signs

Warning signs

Special tool steel, oil-hardened.



AM-344-GB

AM-345-GB

AM-344/05 - AM-344



AM-49/...

AM-41/...

AM-467-GB

AP-499/1



AM-20-GB



AP-510-BT-GB

Safety adhesive tape

Adhesive tape black and yellow.



AT-5005 Length: 100 m

Chain delineators

Polyamide chains.



AL-31/25

AL-32/05

AL-31/25 Red and white - Length: 25 m

AL-31/05 Red and white - Length: 5 m

AL-32/05 Black and yellow - Length: 5 m

AL-31 Opening ring for AL-31/25

Safety boundary post

For temporary installation used with tough link chain delineators. Removal foot Ø 50 mm Length: 0.9 m.



AL-316

AL-318

AL-316 Red and white - Weight: 4.2 kg

AL-318 Black and yellow - Weight: 4.2 kg

Fixing tools for warning signs



AC-21

AC-44

AD-01

AC-21 Small nickelled chain sold in bags of 10 units

AD-01 Roundheaded screw anti-vandalism M3x15 sold in bags of 100 units

AC-44 Self-adhesive plastic plates Ø 40 mm for magnetic fixing (10 units)

Delineators

Brightly colored ribbon. Snap hook on one ribbon end and another on spool. A ring on spool brakes ribbon at desired length. wide: 50 mm length: 20 m.



AL-62-A

AL-63-A

AL-62-A Red ribbon

AL-63-A Yellow ribbon

Plastique consommable. Length: 500 m. Wide: 70 mm.



AL-138


AL-138 Red and white

Self adhesive warning signs

Complete range of self adhesive, warning signs conditioned in box of 20, 30 or 50 units.



| Reference | Dimensions | Characteristics | Quantity/box |
|-----------|-------------|-------------------|--------------|
| AT-41/025 | 25 mm side | self adhesive PVC | 50 |
| AT-41/05 | 50 mm side | self adhesive PVC | 30 |
| AT-41/1 | 100 mm side | self adhesive PVC | 20 |
| AT-49/025 | 25 mm side | self adhesive PVC | 50 |
| AT-49/05 | 50 mm side | self adhesive PVC | 30 |
| AT-49/1 | 100 mm side | self adhesive PVC | 20 |
| AT-50/025 | 25 mm side | self adhesive PVC | 50 |
| AT-50/053 | 50 mm side | self adhesive PVC | 30 |
| AT-50/1 | 100 mm side | self adhesive PVC | 20 |
| AT-51/025 | 25 mm side | self adhesive PVC | 50 |
| AT-51/05 | 50 mm side | self adhesive PVC | 30 |
| AT-51/1 | 100 mm side | self adhesive PVC | 20 |
| AT-52/05 | 50 mm side | self adhesive PVC | 30 |
| AT-52/1 | 100 mm side | self adhesive PVC | 20 |
| AT-53/05 | 50 mm side | self adhesive PVC | 30 |
| AT-53/1 | 100 mm side | self adhesive PVC | 20 |
| AT-54/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-54/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-55/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-55/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-56/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-56/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-57/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-57/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-58/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-58/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-59/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-59/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-60/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-60/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-61/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-61/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-62/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-62/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-63/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-63/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-66/1 | 100 mm side | self adhesive PVC | 10 |

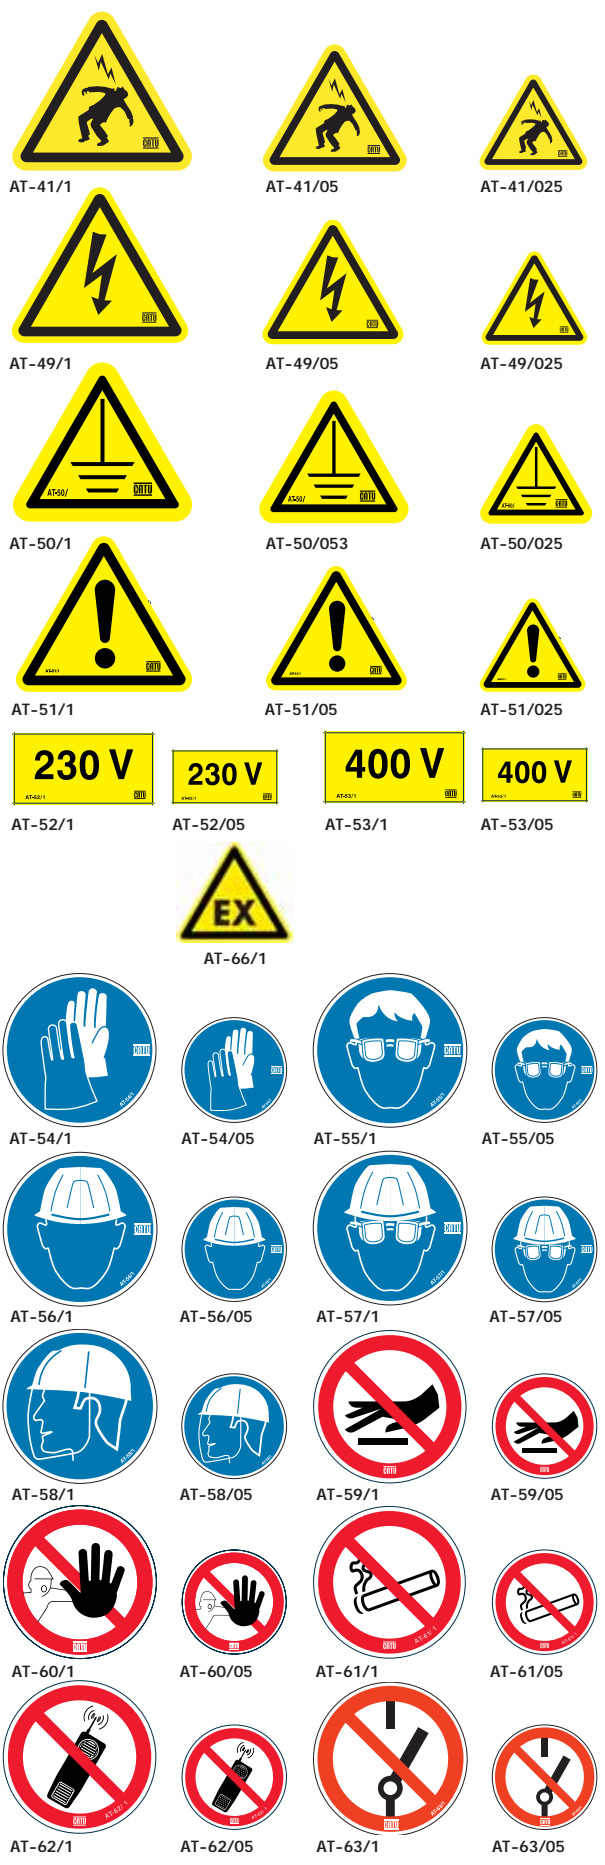

Low voltage

"Customize your labels! On request"

Available on request: Self adhesive rigid plastic warning signs. High Quality, strong sticking on every surfaces: concrete, painted wall, metal, wood, plastic, glass.

Voltage multi-tester DETEX™ 911-EX

The DETEX 911-EX has been designed in compliance with IEC/CENELEC standard 61243-3 in response to the requirements of European standard EN 50110-1.

The device is a voltage detector which checks the absence of voltage (AC and DC) and a multi-tester.

It enables to:

- check the voltage levels from 6 to 690 Volts;
- check the continuity of disconnected electric circuit;
- find phase or neutral (by single pole method);
- determine polarities.

A.C or D.C voltage test

voltage level testing by light-emitting diodes: 6, 12, 24, 50, 127, 230, 400, 690 V and emission of audible signal.

Polarity Test

Presence of A.C voltage signalling by lighting of +6 and -6 V diodes.

Presence of D.C voltage signalling by lighting of the +6V or -6V diode.

Phase/neutral identification

Signaling by lighting of the + 6V diode when the red probe is in contact with the phase.

Continuity test

Continuity resistance lower than 80 Ohms is indicated by lighting of all diodes and emission of audible signal.

Operating check

By short-circuit on the probes; all of the diodes light up, the audible signal sounds.

Technical features

Field of use: from 6 to 690 V ~ or =

Frequency: 50-60 Hz

Operating temperature: -10 °C / +55 °C

Storage temperature: -25 °C / +55 °C

Protection level: IP54 / IK 06

Double insulation Class II

Power supply by 9 volt 6LR61 type alkaline battery

IEC 61243-3



IEC-61243-3
EN 50110-1
CE



Fits on safety power plug (patented)

MS-911-EX

Delivered with power supply
Weight: 0.370 kg

ACCESSORIES

M-87369

Storage Bag



M-87369
Storage bag

Voltage multi-tester with phase rotation DETEX™ 911/2

The DETEX 911/2 has been designed in compliance with IEC/CENELEC standard 61243-3 in response to the requirements of European standard EN 50110-1.

The device is a voltage detector which checks the absence of voltage (AC and DC) and a multi-tester.

It enables to:

- check the voltage levels 12 to 400 Volts;
- check the continuity of disconnected electric circuit;
- find phase or neutral (by single pole method);
- Control the phase rotation;
- Determine polarities.

It is equipped with IP2X safety test probes.

A.C or D.C voltage test

voltage level testing by light-emitting diodes: 12, 24, 50, 127, 230, 400V and emission of audible signal.

Polarity Test

Presence of A.C voltage signaling by lighting of +12 and -12 V diodes.

Presence of D.C voltage signaling by lighting of the +12V or -12V diode.

Phase/neutral identification

Signaling by lighting of the + 12V and -12V diodes with audible signal when the red probe is in contact with the phase.

Phase rotation

Signaling by lighting of a green diode when the rotation is correct and by a red diode when the rotation is not correct.

Control method with only two safety test probes.

Continuity test

Continuity resistance lower than 80 Ohms is indicated by lighting of all diodes and emission of audible signal.

Operating check

By short-circuit on the probes; all of the diodes light up, the audible signal sounds.

| | |
|----------|---|
| MS-911/2 | Delivered with power supply Weight: 0.370 kg |
|----------|---|

| | |
|---------|-------------|
| M-87369 | Storage Bag |
|---------|-------------|



IEC-61243-3
EN 50110-1
CE

Technical features

- Field of use: From 12 to 400 V A.C and D.C
- Frequency: 50/60 Hz
- Operating temperature: -10/+55°C
- Storage temperature: -25/+55°C
- Protection level: IP54
- Double insulation Class II
- Power supply by 9 volt 6LR61 type alkaline battery

Phase order indicator DETEX™ 152+

Signaling via the successive lighting of diodes symbolising rotation. Input terminals are connected to the corresponding phases (green, yellow, brown):

correct connection: lighting according to "OK" order, incorrect connection: "REVERSE" order lighting: reverse 2 phases.

"FAULT" diode lights: phase cut off or incorrectly connected.

90 to 400 V - 50/60 Hz / IP54 IK06 / CAT III.

Works on generating units.

Device delivered in storage bag with:

- 3 probes with retractable protectors and 1.20 m lead - yellow, green and brown - clamps - yellow and brown,
- 2 insulated crocodile clamps.

| | |
|---------|--|
| MS-152+ | Delivered complete with storage bag Weight: 0.380 kg - 60 x 100 x 25 mm |
|---------|--|



IEC-61557-7
EN 50110
CE

Works on generating units

Contact probes for L.V. tester

To be used only with MS-911/2 tester.

For overhead lines

Contact antennas serve as suspension hooks.

Marked with standard colours: black and red.

Total length: 1.25 m.

MS-8014 2 probes, in bag 50 x 130 x 1.300 mm - 0.40 kg



MS-8014

To be used only with MS-911/2 tester.

For installations

Round tip contact. Total length: 0.50 m.

MS-8013 2 probes, in bag 50 x 150 x 470 mm - 0.750 kg



MS-8013

Voltage take-off punch

The voltage take-off punch is enable to make an insulating piercing on a low voltage wire to plug a measurement device.

Fit with pin or safety test probe with 4 mm diameter.

| Reference | Capacity (Ø mm) | Weight (kg) |
|--------------|-----------------|-------------|
| MS-62 | 5.6 - 14.4 | 0.015 |
| MS-63 | 12 - 31 | 0.05 |



POINTEST™ Safety test probes for voltage detectors

Safety test probe for voltage detector use only.

4 mm retractable shrouded plug, 4 mm standard socket or 1,20 m double sheathed lead,

Probe 26 mm length, 1000 V A.C or D.C, IP2X.

IEC 61010-2-031

CE

CX-35811 Green safety test probe 1.20 m lead

CX-45211 Brown safety test probe 1.20 m lead

CX-45511 Black safety test probe 1.20 m lead

CX-45411 Yellow safety test probe 1.20 m lead



Safety crocodile clamps

Crocodile clamps.

Fully insulated crocodile clamps with large jaw opening: 20 mm.

IEC 61010-2-031

CE

CX-01222 5 brown crocodile clamps

CX-01422 5 yellow crocodile clamps

CX-01822 5 green crocodile clamps

DX-02006 2 crocodile clamps - black and red



Insulation tester

 CEI 61010-1
 EN 61557-2

The insulation resistance of an installation must be checked periodically and when it is commissioned. Furthermore, a measurement of the insulation resistance of the entire installation (or group of circuits) may be necessary when troubleshooting.

Operating principle

The measurement voltage shall be 500 V DC (for installations operating at 500 V or less) in order to detect any insulation defect between two cables that are normally isolated from each other. The choice of a high test voltage provides an easier means of demonstrating a latent insulation fault (conventional ohmmeters only output a few volts).

An installation is declared to be conform if the insulation resistance is $> 500 \text{ k}\Omega$.

The DT-500 insulation tester provides an easy, fast and safe means of making this measurement.

The insulation tester DT-500 is designed to test in total safety the insulation resistance of a low voltage installation.

DT-500 is equipped with:

- 3 safety test probes IP2X
- 1 red safety test probe (phase)
- 1 Yellow/green safety test probe (earthing)
- 1 blue safety test probe (neutral) raccordable (Fig.3) on a safety plug
- 3 safety crocodile clamps (red, yellow/green and blue).

It enables to test the insulation resistance between each active wire and the earth (Fig.1). For fragiles receptors (electronics), we recommend to use the third blue test probe.

In this configuration, the neutral and the phase are linked together which avoids any damage on electronic components (Fig.2).

Insulation resistance test

When the DT-500 is connected to a low voltage switch off installation it output 500 V DC.

Signaling by a blue flashes diode. During the measurement the diodes light up in sequence.

The value is indicated on one of the diodes:

Red beetween: 0, 300, 400 k Ω .

Green beetween: 500, 600, 700, 800, 900, 1000 k Ω and ∞ .

Complete safety

The DT-500 is equipped with a safety system. If it is connected on a live installation, a flashes red warning diode light and measurement is impossible.

Technical characteristics

our insulation tester is designed according to standard EN 61557-2.

It also respects international electrical safety standard IEC 61010-1.

- Output voltage 500 V DC.
- Nominal output current at 500 V: 1 mA.
- Measurement range 0 + ∞ .
- IP54, IK06.
- Batteries 4 x LR6.
- Size 213 x 75 x 46 mm.
- Storage temperature: -25 °C/+70 °C.
- Usage temperature: -15 °C/+45 °C.

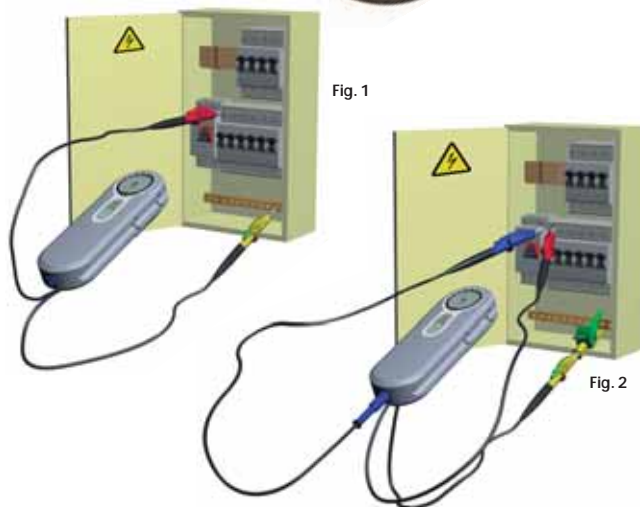


Fig. 3



M-87-292



| | |
|---------|---|
| DT-500 | Delivered complete with batterie, accessories and a storage plastic case - Weight: 0.6 kg |
| M-87292 | Storage bag for DT-500 - 280 x 180 x 70 |

IDENTEX™ protection and switching devices identifier on L.V. panel

CE

Identex MX-300 makes it possible to identify the origin of a source of voltage on the wire conductors connected to protection devices (cut-offs, magnothermal circuit breaker, interdifferentials) on panel. This operation is carried out without switching off the main power supply. The identification of a socket, ceiling light fitting or an electric motor connection is therefore easily carried out under voltage. Identex is composed of two active parts: a current extractor and a receiver.

Technical characteristics:

Voltage of use: 230 or 400 V 50 Hz +/- 10%

Use Temperature: 0°C/+40°C

Degree of protection: IP20, IK06

Class I reinforcement insulation (current extractor)

Complies with standards: EN-61010-1 & IEC-664

Possible detection of the signal with max network current of 80 A.



| | |
|---------------|---|
| MX-300 | Delivered complete with all its connection supply |
|---------------|---|

ACCESSORIES

| | |
|-----------------|--|
| M-951735 | Connection lead for 230 V connector 1.5 m length |
| M-951736 | Set of black and red leads 2.5 m length |
| DX-02006 | Set of black and red crocodile clamps |

Electrical installation testers CATEX™

"TT, TN" network

The CATEX testers enable you to perform the following checks:

Presence of voltage at the terminals of a socket, integrity of the earth circuit, correct polarity:

the position of the phase and the neutral

is indicated, correct operation of the ELCB system at the following sensitivities, 30 mA, 100 mA, 300 mA, 500 mA, 650 mA.

The ELCB check function is only applicable to single phase circuits:

230 V between phase and neutral or between phases (DT-102).

Operating voltage: 230 V +/- 10%

Frequency: 50/60 Hz +/- 10%

Operating temperature: -15°C / +45°C

IP 40 IK03

Fuse protection: 2 delayed fuses 250 mA.

IEC 61010-1

CE

| | |
|---------------|--|
| DT-110 | Range: 30, 500 mA - Ph/N For use on standard socket |
| DT-150 | Range: 30, 300, 500, 650 mA - Ph/N For use on standard socket, delivered with bag |
| DT-102 | Range: 30, 100, 300 mA- Ph/N and 30, 100, 300 - Ph/Ph For use on French and German socket |
| DT-157 | Range: 30, 100, 300, 500 mA For use on UK socket |

ACCESSORIES

| | |
|-----------------|---|
| M-952271 | Lead set for checks on L.V distribution board (for DT-110/DT-150/DT-300 only) |
|-----------------|---|



Earth and continuity loop controllers CATOHM™

"TT" network

The CATOHM earth and continuity loop controller enables:

- checking electrical resistance level of local earth socket, indicating by LCD display:
 - back lighting blue (1) if the value is above 100 Ω
 - back lighting red (3) if the value is - uper than 100 Ω
 - incorrect voltage (2)
 - earth not corrected (2)
- checking the presence and level of voltage at the connection terminals of a live 10/16 A socket,
- checking the integrity of the earth circuit (continuity < 2 Ω), correct polarity (position of the phase and the neutral is indicated),
- checking electrical continuity of metal masses.

Operating voltage: 230V - 10% / + 6%

Frequency: 50/60 Hz

Temperature of use: -15°C/+45°C

IP 40

Fuse protection: 2 fuses 5 x 20 mm, 160 mA, (delayed fuse).

Class II category III

Delivered with wound-up extension.

Weight: 0.340 kg.

Dimensions: 71 x 210 x 51 mm.

IEC 61010-1
EN 61557-4
CE



Figure 1



Figure 2



Figure 3



DT-300



Figure 4

DT-300

For use on schuko socket

DT-307

For use on UK socket

ACCESSORIES

M-92-1172

Winder

M-87-292

Storage bag

M-952271

Lead set for checks on L.V distribution board (for DT-110/DT-150/DT-300 only)

M-95-1143

Small 2 parts pole for working at a distance - 0.8 m



DT-307



M-87292



M-952271



M-951143



M-921546

Digital multimeter- Cat III 600 V

This digital multimeter is compact 3 1/2 digit.
For measuring DC and AC voltage and current, resistance, continuity and temperature.

- AC frequency response: 40 - 400 HZ
- DC voltage: 200 mV/2 V/20 V/200 V/1000 V ($\pm 0.5\% +3$)
- AC voltage: 200 mV/2 V/20 V/200 V/750 V ($\pm 0.8\% +5$)
- DC current: 2 mA/20 mA/200 mA/20 A ($\pm 0.8\% +3$)
- AC current: 2 mA/20 mA/200 mA/20 A ($\pm 1.0\% +5$)
- Resistance: 200 Ω /2 k Ω /20 k Ω /200 k Ω /2 M Ω /20 M Ω /2000 M Ω ($\pm 0.8\% +3$)
- Capacitance: 20 μ F 200 μ F/2 μ F/20 μ F/200 μ F ($\pm 2.5\% +20$)

General specifications

- 3 1/2 digital multimeter, 30 ranges, 70 x 50 mm LCD display, 1999 counts max.
- Back light, data hold
- Diode, triode performance testing, continuity test (audible)

General characteristics

- Battery: 2 x 1.5 V AAA batteries
- Low battery indication level on LCD
- Operation temperature: 0°C / 40°C, < 75%RH
- Storage temperature: -20°C / 60°C, < 85%RH



MX-701 189 x 97 x 35 mm - Weight: 315 g

Digital clamp meter - Cat III 600 V

This digital clamp meter is compact 3 1/2 digit.
Autorange for measuring DC and AC voltage, AC current, resistance, diode, continuity and temperature.

- AC current: 2 A - 600 A.
- AC voltage: 2 V - 600 V. DC voltage: 0.2 V - 600 V.
- Resistance: 200 Ω - 20 M Ω . Continuity: buzzer (< 50 Ω).
- Temperature range: -40°C/+1000°C -40°F/-1832°F.

General specifications

- Display: 3 1/2 digit LCD with a max. reading of 1999
- Polarity: auto polarity indication
- Overrange indication: "OL" or "-OL"
- Automatic zeroing function
- Sensor: clamp-shape transformer for AC measurement
- Jaw opening capability: \varnothing 36 mm
- Max. measurable conductor: \varnothing 30 mm

General characteristics

- Battery: 2 x 1.5 V AAA batteries
- Low battery indication
- Operation temperature: 0°C / 40°C, < 75% RH
- Storage temperature: -20°C / 60°C, < 85% RH



MX-702 190 x 70 x 38 mm - Weight: 220 g

POINTEST™ Safety test probes for multimeter and clamp-meter

Safety test probes for multimeter and clamp-meter use only.
4 mm retractable shrouded plugs, 4 mm standard socket or 1.20 m double sheathed lead,
Probes 26 mm length, 1000 V A.C or D.C, IP2X.

DX-02001 Set of 2 contact probes, black and red with socket


DX-02002 Set of 2 contact probes, black and red 1.20 m lead



Short-circuiting systems for bare L.V. overhead lines

For conductors: 3 - 15 mm Ø.
 Easily attached by snapping on with a firm downward pull.
 Released by lateral swinging, no need to push upwards.
 First grip installed by insulating stick.
 First clamp/stick connection has automatic ratchet.
 Waterproof bag.
 To be completed with earthing equipment. See page 28.

IEC 61230

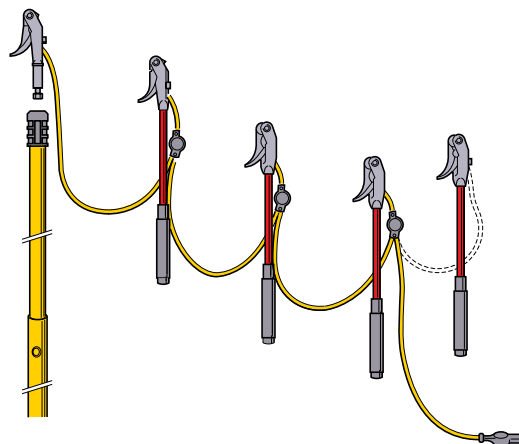


Packaging: waterproof bag 250 x 85 x 1160 mm.

| Reference | Rating (kA/1s) | Short-circuit cables (mm ²) | Weight (kg) | Number of clamps | Insulated telescopic stick |
|-----------|----------------|---|-------------|---------------------|----------------------------|
| MT-404 | 3 | 16 | 3.4 | 3 MT-411/1 MT-411-C | CE-2-21-C/length: 2 m |
| MT-405 | 3 | 16 | 3.8 | 4 MT-411/1 MT-411-C | CE-2-21-C/length: 2 m |
| MT-406 | 3 | 16 | 4.2 | 5 MT-411/1 MT-411-C | CE-2-21-C/length: 2 m |
| MT-407 | 3 | 16 | 4.6 | 6 MT-411/1 MT-411-C | CE-2-21-C/length: 2 m |

Short-circuiting and earthing systems

Lowlock system:
 For conductors 3 to 21 mm Ø.
 With clamps type "snap-on/screw-on".
 Connecting cables: 35 mm² copper.

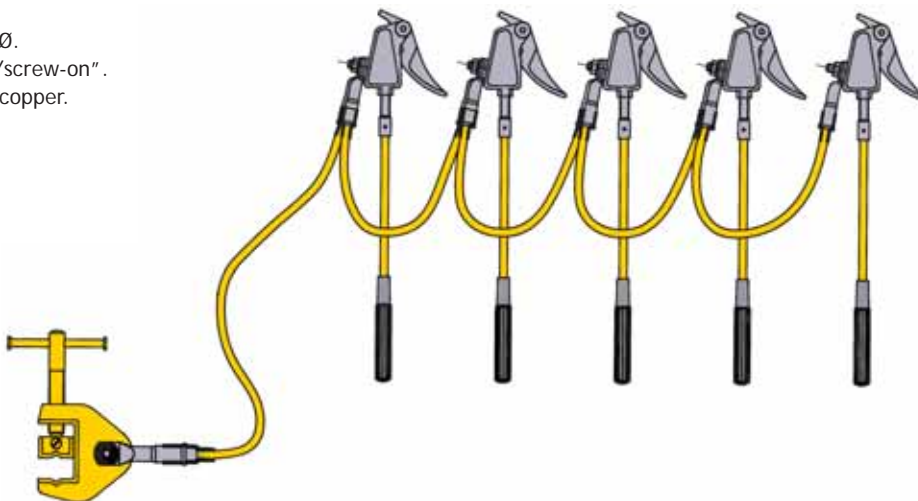


| Reference | Rating (kA/1s) | Weight (kg) | Composition |
|--------------|----------------|-------------|--|
| MT-615/1-7,5 | 7.5 | 3 | 5 MT-616/1-03 contact clamps on handles (l = 0.35 m each) 4 braids of M-24-35 copper cable (1.00 m) 1 M-87-153 carrying bag 250 x 85 x 750 mm |
| MT-615/2-7,5 | 7.5 | 6.5 | 5 MT-616/1-03 contact clamps on handles 4 braids of M-24-35 copper cable (1.00 m) 1 braid of M-24-35 copper cable (7.00 m) 1 MT-840/1 earth clamp |

For other models, please consult us.

Short-circuiting systems for insulated L.V. overhead lines

Connected to female sockets permanently installed on power lines. Equipment includes either 5 or 6 copper-aluminium alloy stubs with bayonet locking and insulating cap. To be completed with earthing equipment. See below.

IEC 61230

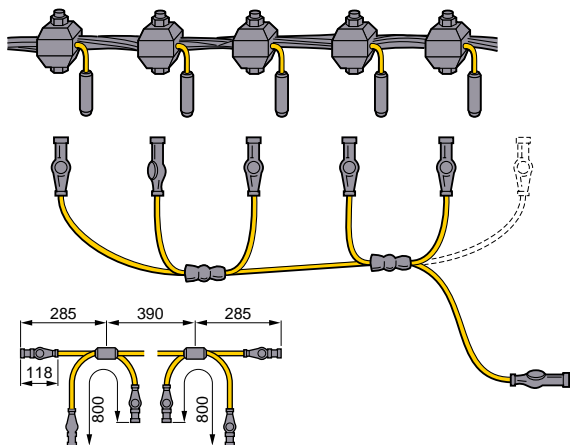


Packaging: polypropylene case - 234 x 215 x 75 mm.

| Reference | Rating (kA/1s) | Short-circuit cables (mm ²) | Weight (kg) | Composition |
|-----------|----------------|---|-------------|-------------|
| MT-205 | 4 | 16 | 1.10 | 5 stubs |
| MT-206 | 4 | 16 | 1.50 | 6 stubs |
| MT-207 | 4 | 16 | 1.9 | 7 stubs |

Earthing equipment

Earthing equipment with bayonet splicing. Earth rod to be ordered separately. See below.

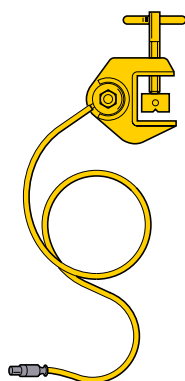

Packaging: polypropylene case - 310 x 280 x 105 mm.

| Reference | Weight (kg) | Cable (m x mm ²) | Earth clamp |
|-----------|-------------|------------------------------|-------------|
| MT-245 | 3.0 | 10 x 16 | MT-840/1 |
| MT-249 | 3.8 | 15 x 16 | MT-840/1 |

Earth rod

For use with earthing equipment
Hexagonal 18 mm per side.
Galvanized steel.



MT-650 Length: 1 m - Weight: 2.2 kg

Short-circuiting system for consumer units

The link assemblies, included in this equipment, consist of extra flexible 16 mm² multistrand copper cable with an IEC 1230 silicone envelope, recommended for indoor equipment.

The elements contained in the case can be used for establishing the equipment suited to the unit to be processed. The cartridge equipment is intended for HBC 22 x 58 mm fuse cartridge connection boxes and knife cartridges size 00. The knife equipment is intended for connection boxes or knife switch networks.

The mini-clip equipment is designed for the short-circuiting of take-off boxes more particularly using intermediate parts (sockets with 10 mm Ø terminals and M8 hexagonal end). The standard equipment for a three phase installation includes: the sets of cartridges, knives or mini-clips for adaptation to any type of unit, the interconnecting assemblies consisting of 4 extra flexible 16 mm² copper cables connected at the center by a connector, 1 installation and crimping kit. Rating: 4 kA/1s Weight: 4.3 kg.

| Reference | Composition |
|-----------|---|
| MC-290/2 | 8 cartridges 8 cartridges type "00" 8 clamps 8 M8 connections 2 (280 x 320 mm) cable connections 2 (370 x 440 mm) cable connections 1 M8 key wrench 1 right angle hexagonal key wrench 4 mm 1 13/17 and 14 mm open end spanner 1 handle MC-161 |



Short-circuiting system for L.V equipment ISOSTOP™ system

Rating: 6 kA/1S
 Standard equipment composition: 1 or 2 sets of 3 knives, cables connections: H07 RN-F 25 mm², 1 earth clamp MT-841 1 handle MC-161.

| Reference | Composition | Weight (kg) |
|-----------|--------------------------------------|-------------|
| MC-165/40 | 3 MC-160 earth cable 0.60 m | 4.00 |
| MC-175/40 | 3 MC-115 earth cable 0.60 m | 3.75 |
| MC-166/40 | 3 MC-115 3 MC-160 earth cable 0.60 m | 5.60 |
| MC-166/60 | 3 MC-115 3 MC-160 earth cable 6 m | 4.20 |



Jumper cable with clamps on insulated handle

2 clamps on insulated handle - MT-315
 Capacity (mm): Ø 4 - 27 - 40
 Cable connection: 35 mm²
 Rating: 6 kA/1s
 Continuous rating: 75 A
 Clamp material: copper aluminium alloy
 1 insulated cable
 Length: 1 m, Section: 25 mm².

| | |
|----------|---|
| MT-315/2 | Dimensions: 40 x 60 x 910 mm - Weight: 0.530 kg |
|----------|---|




Short-circuiting equipment

Connecting set formed by extra flexible multi-strand copper cables 16 mm² with silicon sheath according IEC-61230. Wide use temperature range (-40°C, +70°C). No toxic smokes emission in case of short circuit.

IEC 61230

| Reference | Designation |
|------------|------------------------------|
| MC-296-440 | Connection set 440 + 370 mm* |
| MC-296-320 | Connection set 320 + 280 mm* |

* Other models and length on request.

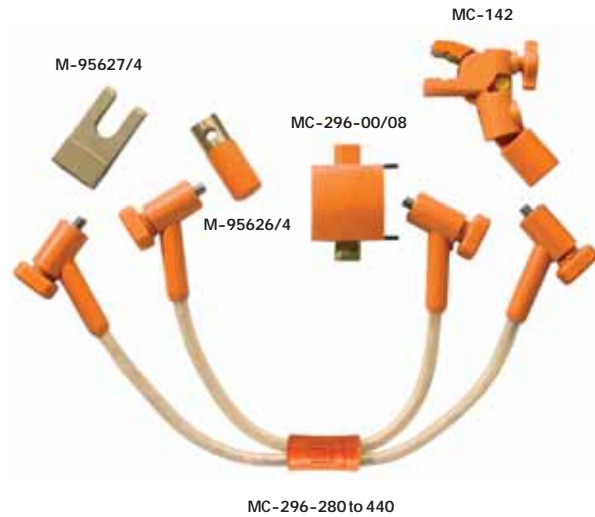


Set of: cartridge, connecting blade and jumper clamp.

| Reference | Designation |
|---------------|-----------------------------|
| M-95627/4* | Connecting blade |
| M-95626/4* | Round cartridge HPC 22 x 58 |
| MC-296-00/08* | Cartridge size 00 |
| MC-142 | Jumper clamp |

* Set of 4.

MC-296-115/12 or MC-296-115/08

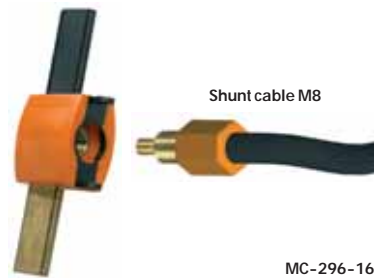

MC-296-160/12

MC-161

Connection set M8 or M12



| | |
|--------|--------------------|
| MC-161 | Maneuvering handle |
|--------|--------------------|

Case (340 x 250 x 80 mm) for specific set. Réf.: M-91209.

Connecting blades M8 or M12

| Reference | Designation |
|----------------|-------------------------|
| MC-296-115/08* | Between axes 115 mm M8 |
| MC-296-115/12* | Between axes 115 mm M12 |
| MC-296-160/12* | Between axes 160 mm M12 |

* Set of 4.

To be used with jumper cable (M8 or M12) connection cable (on request).

Additional equipment:

- Jumper cable (see page N°36)
- Threaded adapter (see page N°37)



Mini jumper clamps fully insulated for switchboard use

These clamps are specially designed for use on energized parts in LV installations (switchboards, etc.) to make temporary connections when limited space is available. Models with jaws designed to axially grip conductors can be used on threaded bolts or shanks and nuts. The MC-142 model, whose size has been reduced to the strict minimum, is designed to be tightened with a nut wrench. All other models in this series tighten with T-handle screw. All clamps receive cable terminals with ISO 8 mm pitch threading as in the MC-153 series (described below). Current rating: 200 A.



| Reference | Clamp capacity to main conductor | Orientation with respect | Size (mm) | Weight (kg) |
|-----------|--|------------------------------------|---------------|-------------|
| MC-141 | Six-sided 17-19 mm | | 71 x 150 x 24 | 0.26 |
| MC-142 | Round 6-10 flat 0-5 mm | Axial (at cable end) + transversal | 58 x 38 x 33 | 0.130 |
| MC-143 | Flat bar, thickness 2-25 mm | | 67 x 145 x 26 | 0.230 |
| MC-144 | Round 8-12 square 9-10 mm | Axial (at cable end) | 150 x 75 x 23 | 0.280 |
| MC-145 | 16-75 mm ² | Transversal | 110 x 70 x 23 | 0.220 |
| MC-146 | 38-240 mm ² | Transversal | 110 x 70 x 23 | 0.230 |
| MC-147 | Threaded rod M8 | | 66 x 98 x 25 | 0.18 |
| MC-147/1 | Threaded rod M10 | | 66 x 98 x 25 | 0.195 |
| MC-148 | Clamp with tapped revolving rod end M8, 200 A shunt. To be used with an insulated six-sided male hex key 5 mm. | | 66 x 80 x 25 | 0.175 |
| MC-148/1 | Clamp with tapped revolving rod end M8 for 10 to 50 mm cable | | 66 x 80 x 25 | 0.175 |
| MC-149 | Bar 20-30 mm width | | 56 x 165 x 58 | 0.486 |

Jumper cables with threaded ferrules

To be used in conjunction with any of the clamps described above to make jumper equipment suit most any need both quickly and easily. Cable is IEC-60245 type, either 35 mm² current rating: 200 A or 50 mm² current rating: 250 A, depending on the models. Delivered with screwing ISO M8.




Section: 50 mm²

Section: 35 mm²

| | |
|-----------|-----------------------------------|
| MC-153/05 | Length: 0.50 m - Weight: 0.270 kg |
| MC-153/10 | Length: 1.00 m - Weight: 0.570 kg |
| MC-153/30 | Length: 3.00 m - Weight: 1.720 kg |
| MC-153/60 | Length: 6.00 m - Weight: 3.460 kg |

| | |
|-----------|-----------------------------------|
| MC-155/05 | Length: 0.5 m - Weight: 0.380 kg |
| MC-155/10 | Length: 1.00 m - Weight: 0.760 kg |
| MC-155/20 | Length: 2.00 m - Weight: 1.520 kg |
| MC-155/30 | Length: 3.00 m - Weight: 2.280 kg |
| MC-155/60 | Length: 6.00 m - Weight: 4.560 kg |
| MC-155/80 | Length: 8.00 m - Weight: 6.080 kg |


Jumper cable with insulated jumper clamps

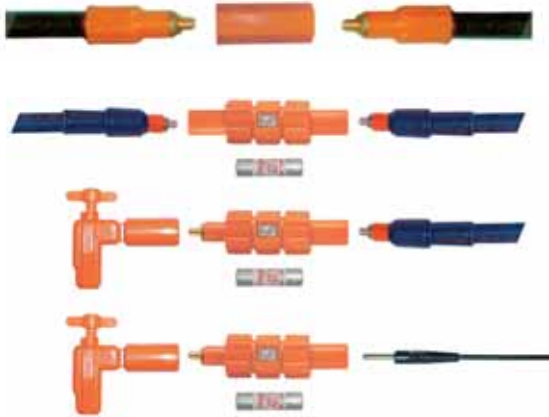

| Reference | | Size (mm) | Weight (g) |
|-----------|------------------------|--------------|------------|
| MC-121 | Junction for shunt M8 | Hexa. 22 L60 | 0.055 |
| MC-122 | Fuse holder for shunt | Ø 35 L125 | 0.130 |
| MC-123 | Fuse holder for shunt | Ø 35 L125 | 0.140 |
| MC-124 | Fuse holder for clamps | Ø 35 L125 | 0.140 |

Threaded adapter

Cylindrical body diameter 10 mm to fits on panel network thread. Total length 50 mm.

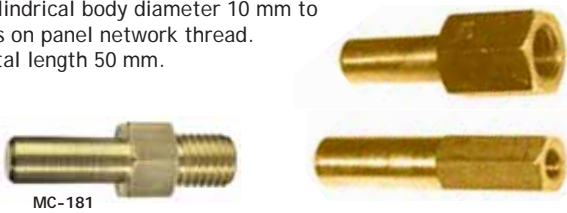

| | |
|--------|--|
| MC-181 | 4 adapters for short-circuiting - M12 Weight: 0.05 kg |
| MC-182 | 4 adapters M8 Width: 50 x 10 mm - Weight: 0.027 kg |
| MC-183 | 4 adapters M12 Width: 50 x 17 mm - Weight: 0.048 kg |

Tap off box

The tap off box allows on each side to connect 3 by pass jumpers type MC-153/... is delivery equipped with six removable fittings type MC-156/1 and an insulating wrench. This item in conjunction with by pass jumpers allows to shunt a tap off box by means of a second tap off box. Current rating 200 A.



| | |
|----------|----------------------------------|
| MC-156 | 40 x 80 x 158 mm |
| MC-156/1 | Spare part |
| MO-237-D | Triangular spanner with T handle |

Jumper cable with insulated jumper clamps

2 clamps MC-120
Spring tightening. Connector for 8 mm cable Ø.
Tightening capacity: 12 mm (diameter - flat).
Rated insulation: 1500 V. Rating 5 (kA/1s).
Continuous rating 75 A. 1 insulated cable 25 mm² section.



| Reference | Cable length (m) | Weight (kg) |
|------------|------------------|-------------|
| MC-120/15 | 1.50 | 0.850 |
| MC-120/50 | 5.00 | 1.950 |
| MC-120/100 | 10.00 | 4.000 |

Shunt Telescopic probe

This probe is completely insulated through the end, and includes a retractable shroud containing a 10 mm diameter copper braided stem that connects to device terminals and network connector boards. The female screw socket allows attachment to shunt cables. Nominal current: up to 250 A.



| | |
|----------|--|
| MC-126 | Connector with insulated probe 1.5 to 16 mm In 60 A - 65 x 185 x 29 - 0.130 |
| MC-126/1 | Connector with insulated probe 10 to 70 mm In 100 A - 65 x 185 x 29 - 0.166 |



| | |
|--------|-------------------------------------|
| MC-150 | Ø 33 mm L 180 mm - Weight: 0.160 kg |
|--------|-------------------------------------|

Jumper connecting box with fuse

The shunt for collective channeling is a box used to make sure, before proceeding to the replacement of/removing a molten fuse situated on a channeling, that the defect which brought about the molten is eliminated. This box is used with a fuse when the (nominal) assigned intensity of the channeling is < 100 A and with 2 fuses when this intensity is included between 100 A and 200 A. It can also be used to open a circuit in load, for example to change a damaged accessory such as a pin.



| | |
|--------|--|
| MC-116 | Shunt for collective channeling from 30 to 200 A |
|--------|--|

Other connecting box: consult us.


ISOMIL™ 2



1000 V
IEC60900 EN60900

The new range of bimaterial insulated tools for live working up to 1000 Volts according to IEC 60900 standard.

Each ISOMIL tool is controlled and tested to 10000 volts. This ensured by strict quality control procedures.

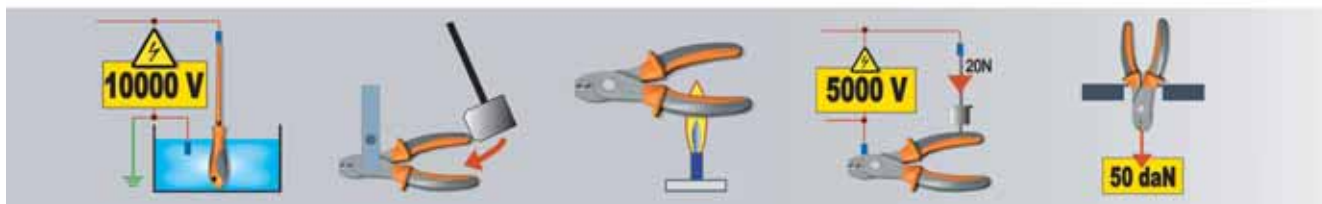

Flat blade screwdrivers

Chrome - molybdenum vanadium steel blade.



| Reference | Characteristics | Weight (g) |
|-----------|--------------------|------------|
| MO-72003 | Blade 3 x 100 mm | 40 |
| MO-72004 | Blade 3.5 x 100 mm | 43 |
| MO-72005 | Blade 4 x 100 mm | 58 |
| MO-72006 | Blade 5.5 x 125 mm | 76 |
| MO-72007 | Blade 6.5 x 150 mm | 112 |
| MO-72009 | Blade 8 x 175 mm | 171 |



POZIDRIV screwdrivers

Chrome - molybdenum vanadium steel blade.



| Reference | Characteristics | Weight (g) |
|-----------|----------------------|------------|
| MO-72040 | n°0 head 3 x 60 mm | 37 |
| MO-72042 | n°1 head 4.5 x 80 mm | 58 |
| MO-72044 | n°2 head 6 x 100 mm | 91 |
| MO-72046 | n°3 head 8 x 150 mm | 170 |



Universal plier

Special steel, chrome mat finished.

| Reference | Length (mm) | Cutting capacity | Weight (g) |
|-----------|-------------|---|------------|
| MO-72102 | 180 | For copper and aluminium Ø max (mm): 2.5 | 255 |



Bent snipe nose plier

Special steel, chrome mat finished.

| Reference | Length (mm) | Cutting capacity | Weight (g) |
|-----------|-------------|---|------------|
| MO-72142 | 160 | For copper and aluminium Ø max (mm): 2.5 | 140 |



Flat nose plier

Special steel, chrome mat finished.

| Reference | Length (mm) | Weight (g) |
|-----------|-------------|------------|
| MO-72132 | 160 | 140 |



Round nose plier

Special steel, chrome mat finished.

| Reference | Length (mm) | Weight (g) |
|-----------|-------------|------------|
| MO-72122 | 160 | 140 |



Side cutter

Special steel, chrome mat finished.

| Reference | Length (mm) | Cutting capacity | Weight (g) |
|-----------|-------------|---|------------|
| MO-72162 | 160 | For copper and aluminium Ø max (mm): 4.0 | 212 |



Cable cutter

Special steel, chrome mat finished.

| Reference | Length (mm) | Cutting capacity | Weight (g) |
|-----------|-------------|---|------------|
| MO-72200 | 160 | For copper and aluminium Ø max (mm): 5.0 | 238 |



Wire stripping plier

Special steel, chrome mat finished.

| Reference | Length (mm) | Cutting capacity | Weight (g) |
|-----------|-------------|---|------------|
| MO-72172 | 160 | For copper and aluminium Ø max (mm): 5.0 | 166 |



Water pump plier

Special steel.

| Reference | Length (mm) | Weight (g) |
|-----------|-------------|------------|
| MO-72155 | 250 | 347 |



Screwdrivers kit

| Reference | Composition |
|-----------|---|
| KIT-23 | MO-72004 Flat blade screwdriver 3.5 x 100 mm |
| | MO-72006 Flat blade screwdriver 5.5 x 125 mm |
| | MO-72009 Flat blade screwdriver 8 x 175 mm |
| | MO-72042 POZIDRIV screwdriver n°1 4.5 x 80 mm |
| | MO-72044 POZIDRIV screwdriver n°2 6 x 100 mm |



Pliers kit

| Reference | Composition |
|-----------|---------------------------------------|
| KIT-27 | MO-72102 Universal plier 180 mm |
| | MO-72155 Water pump plier 250 mm |
| | MO-72172 Wire stripping plier 160 mm |
| | MO-72142 Bent snipe nose plier 160 mm |
| | MO-72200 Cable cutter 170 mm |



Intervention kit

| Reference | Composition |
|-----------|---|
| KIT-24 | MO-72004 Flat blade screwdriver 3.5 x 100 mm |
| | MO-72006 Flat blade screwdriver 5.5 x 125 mm |
| | MO-72009 Flat blade screwdriver 8 x 175 mm |
| | MO-72042 POZIDRIV screwdriver n°1 4.5 x 80 mm |
| | MO-72044 POZIDRIV screwdriver n°2 6 x 100 mm |
| | MO-72172 Wire stripping plier 160 mm |
| | MO-72142 Bent snipe nose plier 160 mm |
| | MO-72200 Cable cutter 160 mm |



Complete intervention kit

| Reference | Composition |
|-----------|---|
| KIT-25 | MO-72004 Flat blade screwdriver 3.5 x 100 mm |
| | MO-72006 Flat blade screwdriver 5.5 x 125 mm |
| | MO-72009 Flat blade screwdriver 8 x 175 mm |
| | MO-72042 POZIDRIV screwdriver n°1 4.5 x 80 mm |
| | MO-72044 POZIDRIV screwdriver n°2 6 x 100 mm |
| | MO-72102 Universal plier 180 mm |
| | MO-72155 Water pump plier 250 mm |
| | MO-72172 Wire stripping plier 160 mm |
| | MO-72142 Bent snipe nose plier 160 mm |
| | MO-72200 Cable cutter 160 mm |




Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

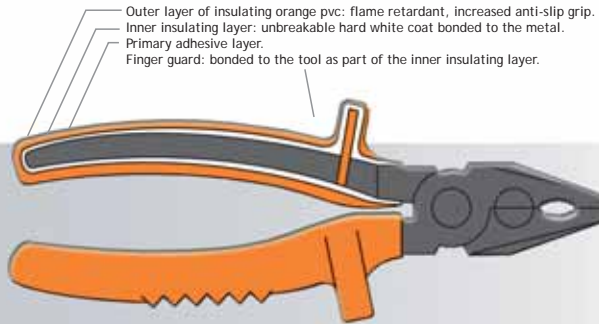

Complete range of insulated tools for live working up to 1000 Volts according to IEC 60900 standard. Each ISOMIL tool is controlled and tested to 10000 volts. This ensured by strict quality control procedures.

Phase tester insulated screwdriver

Phase detection from 127 V A.C.
Maximum voltage use: 1000 V.
Signaling by intermittent lighting through ultra high intensity diode.
Works with an unremovable lithium battery (life time guarantee 3 years).
Frequency: 50/60 Hz.



CE



Patented

| Reference | Characteristics | Weight (g) |
|-----------|----------------------|------------|
| MO-65222 | Flat blade 4 x 85 mm | 65 |

Flat blade screwdrivers

Chrome - molybdenum vanadium steel blade.



| Reference | Characteristics | Weight (g) |
|-----------|--------------------|------------|
| MO-65203 | Blade 3 x 100 mm | 33 |
| MO-65204 | Blade 3.5 x 100 mm | 37 |
| MO-65205 | Blade 4 x 100 mm | 46 |
| MO-65206 | Blade 5.5 x 125 mm | 75 |
| MO-65207 | Blade 6.5 x 150 mm | 94 |
| MO-65209 | Blade 8 x 175 mm | 165 |
| MO-65211 | Blade 10 x 200 mm | 195 |

POZIDRIV screwdrivers

Chrome - molybdenum vanadium steel blade.



| Reference | Characteristics | Weight (g) |
|-----------|----------------------|------------|
| MO-65240 | n°0 head 3 x 60 mm | 25 |
| MO-65242 | n°1 head 4.5 x 80 mm | 50 |
| MO-65244 | n°2 head 6 x 100 mm | 75 |
| MO-65246 | n°3 head 8 x 150 mm | 150 |
| MO-65248 | n°4 head 10 x 200 mm | 230 |

PHILLIPS screwdrivers

Chrome - molybdenum vanadium steel blade.



| Reference | Characteristics | Weight (g) |
|-----------|----------------------|------------|
| MO-65230 | n°0 head 3 x 60 mm | 25 |
| MO-65232 | n°1 head 4.5 x 80 mm | 50 |
| MO-65234 | n°2 head 6 x 100 mm | 75 |
| MO-65236 | n°3 head 8 x 150 mm | 150 |
| MO-65238 | n°4 head 10 x 200 mm | 230 |

Universal pliers

Special steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66001 | 160 | 210 |
| MO-66002 | 180 | 260 |
| MO-66003 | 200 | 300 |
| MO-66005* | 250 | 510 |

* New England style



MO-66005

Flat nose pliers

Special steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66300 | 145 | 115 |
| MO-66302 | 160 | 160 |



Round nose pliers

Special steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66202 | 160 | 150 |



Bent snipe nose pliers

Chrome-vanadium steel. Burnished head.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66402 | 160 | 160 |
| MO-66404 | 200 | 185 |



Long nose pliers with side cutter

Special steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66102 | 160 | 145 |



Plug pliers for preinsulated pin terminals

Chrome-vanadium steel for pin terminals 2.8/5/6.35 mm.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66105 | 200 | 200 |



Waterpump pliers

Chrome-vanadium steel. Burnished head.

STANDARD

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66502 | 250 | 410 |



BOX JOINT PLIERS

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-66505 | 250 | 405 |



Side cutters

Special carbon steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Cutting capacity (mm) | | Weight (g) |
|-----------|---------------------|----------------------------|-----------------------------|------------|
| | | Soft 80 kg/mm ² | Hard 140 kg/mm ² | |
| MO-67101 | 140 | Ø 2 | Ø 1 | 150 |
| MO-67102 | 160 | Ø 2.5 | Ø 1.5 | 180 |
| MO-67103 | 180 | Ø 3 | Ø 2.5 | 210 |



End cutting pliers

Special carbon steel, oil-hardened. Burnished head.

| Reference | Overall length (mm) | Cutting capacity (mm) | | Weight (g) |
|-----------|---------------------|----------------------------|-----------------------------|------------|
| | | Soft 80 kg/mm ² | Hard 140 kg/mm ² | |
| MO-67401 | 140 | Ø 2 | Ø 1 | 165 |
| MO-67402 | 160 | Ø 3 | Ø 2 | 210 |
| MO-67404 | 200 | Ø 4 | Ø 3 | 450 |



Cable cutter

Chrome-vanadium forged steel oil-hardened.

| Reference | Overall length (mm) | Cutting capacity (mm) | Weight (g) |
|-----------|---------------------|-----------------------|------------|
| MO-67500 | 170 | Maximum Ø 4 | 420 |



Cable cutters

Chrome-vanadium forged steel oil-hardened.

| Reference | Overall length (mm) | Cutting capacity (mm) | Weight (g) |
|-----------|---------------------|-----------------------|------------|
| MO-67501 | 170 | Maximum Ø 15 | 285 |
| MO-67502 | 230 | Maximum Ø 20 | 520 |



MO-67501



MO-67502

Ratchet cable cutters

For copper and aluminium cables only. Treated forged steel blade.

| Reference | Cutting capacity | Weight (g) |
|-----------|--|------------|
| MO-67599 | Ø 32 mm/180 mm ² Cu 250 mm ² Al | 900 |
| MO-67600 | Ø 38 mm/240 mm ² Cu 300 mm ² Al | 950 |
| MO-67601 | Ø 55 mm/300 mm ² Cu 450 mm ² Al | 975 |



MO-67599



MO-67600

Frontal ratchet cable cutter

For copper and aluminium only. Treated forged steel blade.

| Reference | Cutting capacity | Weight (g) |
|-----------|---|------------|
| MO-67611 | Ø 32 mm 180 mm ² Cu 250 mm ² Al | 900 |



Hacksaw

Protected hard forged steel. Two blade positions. Flush and 90° cutting supplied. Delivered with 2 blades.

| Reference | Blade length (mm) | Overall length (mm) | Weight (g) |
|-----------|-------------------|---------------------|------------|
| MO-64502 | 300 | 450 | 780 |



Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Stripping pliers for L.V. cables

Aluminium casting plier.
To strip L.V. twisted cables.

| Reference | Overall length (mm) | Stripping capacity | Weight (g) |
|-----------|---------------------|--------------------------------|------------|
| MO-67304 | 220 | from 16 to 150 mm ² | 470 |



Stripping pliers for L.V. cables

Aluminium casting plier. To strip L.V. cables.

| Reference | Overall length (mm) | Stripping capacity (mm ²) | Weight (g) |
|-----------|---------------------|---------------------------------------|------------|
| MO-67305 | 265 | From 16 to 150 | 650 |
| MO-67306 | 270 | From 50 to 240 | 670 |



Wire stripping pliers

Chrome vanadium steel. Burnished head.

| Reference | Overall length (mm) | Capacity (mm ²) | Weight (g) |
|-----------|---------------------|-----------------------------|------------|
| MO-67302 | 160 | 0.6 to 10 | 170 |



Electrician's scissors

Stainless steel blades.
Softgrip handles.
Adjustable screw joint.
Non insulated tool.

| Reference | Overall length (mm) | Weight (g) |
|-----------|---------------------|------------|
| MO-72100 | 145 | 62 |



Stripping knives

Delivered with pouch.

| Reference | Blade length (mm) | Overall length (mm) | Weight (g) |
|-----------|-------------------|---------------------|------------|
| MO-61001 | 62 (Straight) | 190 | 110 |
| MO-61002 | 50 (Curve) | 190 | 110 |



Adjustable spanner

Special steel, oil-hardened.

| Reference | Overall length (mm) | Maximum capacity (mm) | Weight (g) |
|-----------|---------------------|-----------------------|------------|
| MO-69002 | 210 | 24 | 295 |
| MO-69003 | 250 | 28 | 450 |
| MO-69004 | 310 | 34 | 550 |
| MO-69005 | 385 | 43 | 1350 |



Reversible hexagonal ratchet handle

Special steel, oil-hardened.

| Reference | Size (mm) | Weight (g) |
|-----------|-----------|------------|
| MO-69210 | 10 | 160 |
| MO-69213 | 13 | 190 |
| MO-69216 | 16 | 350 |
| MO-69217 | 17 | 370 |
| MO-69218 | 18 | 380 |
| MO-69219 | 19 | 390 |



Combination wrench

Special steel sockets.

| Reference | 4 hexagonal sockets | Weight (g) |
|-----------|----------------------------|------------|
| MO-68701 | 6-8-10-12 mm/150 x 150 mm | 225 |
| MO-68702 | 8-10-12-14 mm/150 x 150 mm | 260 |
| MO-68703 | 7-9-11-13 mm/150 x 150 mm | 250 |
| MO-68704 | 8-10-13-17 mm/150 x 150 mm | 260 |



Right angle hexagonal key wrench

Chrome-vanadium steel.

| Reference | Hexagonal head | Weight (g) |
|-----------|-------------------|------------|
| MO-69903 | 3 mm/83 x 123 mm | 30 |
| MO-69904 | 4 mm/84 x 124 mm | 40 |
| MO-69905 | 5 mm/84 x 126 mm | 50 |
| MO-69906 | 6 mm/85 x 126 mm | 70 |
| MO-69908 | 8 mm/87 x 128 mm | 110 |
| MO-69910 | 10 mm/87 x 130 mm | 150 |
| MO-69912 | 12 mm/90 x 132 mm | 240 |



Open end spanners

Chrome-vanadium steel.

| Reference | Size (mm) | Weight (g) | Reference | Size (mm) | Weight (g) |
|-----------|-----------|------------|-----------|-----------|------------|
| MO-68008 | 8 | 40 | MO-68020 | 20 | 185 |
| MO-68009 | 9 | 40 | MO-68021 | 21 | 200 |
| MO-68010 | 10 | 45 | MO-68022 | 22 | 220 |
| MO-68011 | 11 | 50 | MO-68023 | 23 | 250 |
| MO-68012 | 12 | 60 | MO-68024 | 24 | 260 |
| MO-68013 | 13 | 80 | MO-68025 | 25 | 280 |
| MO-68014 | 14 | 100 | MO-68026 | 26 | 300 |
| MO-68015 | 15 | 110 | MO-68027 | 27 | 340 |
| MO-68016 | 16 | 120 | MO-68028 | 28 | 360 |
| MO-68017 | 17 | 140 | MO-68029 | 29 | 400 |
| MO-68018 | 18 | 160 | MO-68030 | 30 | 500 |
| MO-68019 | 19 | 170 | MO-68032 | 32 | 570 |

| Reference | Characteristics | Weight (g) |
|-------------|--|------------|
| MO-68008/19 | 8 open end spanners set 8/10/11/12/13/ 14/17/19 mm | 685 |



Cranked ring wrench

Chrome-vanadium steel.

| Reference | Size (mm) | Weight (g) | Reference | Size (mm) | Weight (g) |
|-----------|-----------|------------|-----------|-----------|------------|
| MO-68107 | 7 | 35 | MO-68120 | 20 | 240 |
| MO-68108 | 8 | 40 | MO-68121 | 21 | 260 |
| MO-68109 | 9 | 45 | MO-68122 | 22 | 260 |
| MO-68110 | 10 | 50 | MO-68123 | 23 | 270 |
| MO-68111 | 11 | 65 | MO-68124 | 24 | 280 |
| MO-68112 | 12 | 80 | MO-68125 | 25 | 300 |
| MO-68113 | 13 | 100 | MO-68126 | 26 | 360 |
| MO-68114 | 14 | 120 | MO-68127 | 27 | 400 |
| MO-68115 | 15 | 150 | MO-68128 | 28 | 440 |
| MO-68116 | 16 | 180 | MO-68129 | 29 | 480 |
| MO-68117 | 17 | 190 | MO-68130 | 30 | 500 |
| MO-68118 | 18 | 195 | MO-68132 | 32 | 540 |
| MO-68119 | 19 | 200 | | | |



Hexagonal spanner with T handle

Chrome steel. length 130 mm

| Reference | Size (mm) | Weight (g) |
|-----------|-----------|------------|
| MO-68610 | 10 | 145 |
| MO-68613 | 13 | 185 |
| MO-68614 | 14 | 220 |



Sockets wrench sets

Chrome steel.



MO-69524

MO-69308/23

MO-69543

Sockets 3/8" (9.53 mm)-6 sided

| Reference | Characteristics (mm) | Weight (g) |
|-------------|--|------------|
| MO-69306 | Socket 6 | 25 |
| MO-69307 | Socket 7 | 30 |
| MO-69308* | Socket 8 | 30 |
| MO-69309 | Socket 9 | 30 |
| MO-69310* | Socket 10 | 35 |
| MO-69311 | Socket 11 | 35 |
| MO-69312* | Socket 12 | 35 |
| MO-69313* | Socket 13 | 45 |
| MO-69314* | Socket 14 | 45 |
| MO-69315 | Socket 15 | 50 |
| MO-69316 | Socket 16 | 55 |
| MO-69317* | Socket 17 | 60 |
| MO-69318 | Socket 18 | 65 |
| MO-69319* | Socket 19 | 70 |
| MO-69321* | Socket 21 | 85 |
| MO-69322* | Socket 22 | 90 |
| MO-69323* | Socket 23 | 100 |
| MO-69513* | Reversible ratchet | 600 |
| MO-69523* | Extension 130 | 124 |
| MO-69533 | Extension 250 | 270 |
| MO-69542 | T wrench 130 | 220 |
| MO-69543 | T wrench 200 | 380 |
| MO-69308/23 | complete sockets set in plastic box 410 x 120 x 75 | 1250 |

Sockets 1/2" (12.7 mm)-12 sided

| Reference | Characteristics (mm) | Weight (g) |
|-------------|--|------------|
| MO-69408* | Socket 8 | 60 |
| MO-69410* | Socket 10 | 60 |
| MO-69411 | Socket 11 | 60 |
| MO-69412* | Socket 12 | 70 |
| MO-69413* | Socket 13 | 70 |
| MO-69414* | Socket 14 | 70 |
| MO-69415 | Socket 15 | 75 |
| MO-69416 | Socket 16 | 75 |
| MO-69417 | Socket 17 | 80 |
| MO-69418 | Socket 18 | 80 |
| MO-69419* | Socket 19 | 85 |
| MO-69420 | Socket 20 | 90 |
| MO-69421* | Socket 21 | 100 |
| MO-69422* | Socket 22 | 100 |
| MO-69423* | Socket 23 | 115 |
| MO-69424 | Socket 24 | 130 |
| MO-69430 | Socket 30 | 160 |
| MO-69514* | Reversible ratchet | 600 |
| MO-69524* | Extension 125 | 250 |
| MO-69534 | Extension 250 | 435 |
| MO-69544 | T wrench 300 | 520 |
| MO-69408/23 | complete sockets set in plastic box 410 x 120 x 75 | 1500 |

* Sockets composing the sets

* Sockets composing the sets

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners
and sockets

Tool sets

Special sockets wrench sets

Chrome steel.



| Reference | Characteristics (mm) | Weight (g) |
|-------------|--|------------|
| MO-69813 | Socket 13 mm - 1/4" | 45 |
| MO-69317 | Socket 17 mm - 3/8" | 60 |
| MO-69840 | Extension 1/4" x 3/8" | 60 |
| MO-69512 | Reversible ratchet - 1/4" | 200 |
| MO-69813/17 | Complete sockets set in plastic box 230 x 170 x 45 | 365 |

| Reference | Characteristics (mm) | Weight (g) |
|-------------|--|------------|
| MO-69810 | Socket 10 mm - 1/4" | 35 |
| MO-69813 | Socket 13 mm - 1/4" | 45 |
| MO-69317 | Socket 17 mm - 3/8" | 60 |
| MO-69840 | Extension 1/4" x 3/8" | 60 |
| MO-69512 | Reversible ratchet - 1/4" | 200 |
| MO-69810/17 | Complete sockets set in plastic box 230 x 170 x 45 | 500 |

Sockets 3/8" Long series

65 mm length. Chrome steel.



| Reference | Socket (mm) | Weight (g) |
|-----------|-------------|------------|
| MO-69610 | 10 | 75 |
| MO-69613 | 13 | 80 |
| MO-69614 | 14 | 100 |
| MO-69616 | 16 | 115 |
| MO-69617 | 17 | 125 |
| MO-69618 | 18 | 140 |
| MO-69619 | 19 | 160 |
| MO-69621 | 21 | 190 |

Sockets 3/8" U.S Standard

Chrome steel.



| Reference | Socket | Weight (g) |
|-----------|--------|------------|
| MO-69735 | 3/8" | 25 |
| MO-69736 | 7/16" | 30 |
| MO-69737 | 1/2" | 35 |
| MO-69738 | 9/16" | 35 |
| MO-69739 | 5/8" | 42 |
| MO-69740 | 11/16" | 50 |
| MO-69741 | 3/4" | 55 |
| MO-69742 | 13/16" | 60 |

6 sided male hex Key / Socket 3/8"

Steel.



| Reference | Socket (mm) | Weight (g) |
|-----------|-------------|------------|
| MO-69393 | 3 | 45 |
| MO-69394 | 4 | 55 |
| MO-69395 | 5 | 60 |
| MO-69396 | 6 | 65 |
| MO-69397 | 7 | 70 |
| MO-69398 | 8 | 70 |
| MO-693100 | 10 | 80 |

Insulated torque wrench 3/8"

Capacity: 8 to 54 Nm (ibF Ft: 5-40).

Linear graduation, english and french scales (ibF Ft and Nm).

Length: 325 mm.

Tolerance: 4%.



| Reference | Characteristics | Weight (g) |
|-----------|-----------------|------------|
| MO-69050 | 8 to 54 Nm | 790 |

Tool bag

For intervention works, strong waterproof, canvas reinforced bottom, large capacity of storage, shoulder strap.



| Reference | Characteristics | Weight (Kg) |
|-----------|--------------------|-------------|
| M-87370 | 440 x 330 x 160 mm | 1 100 |

Tool bag

Black grained leather with handle. The interior includes: a pocket, a separation which forms a tool tray and a fold-down tool tray.



| Reference | Characteristics | Weight (Kg) |
|-----------|--------------------|-------------|
| MO-34 | 410 x 280 x 150 mm | 3 200 |

Insulated tool kits

For the most common operations, CATU proposes 4 kits of ISOMIL handtools.

| Reference | Composition |
|-----------|--|
| KIT-03 | MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm |
| | MO-65244 Pozidriv screwdriver N°2 6 x 100 mm |
| | MO-65204 Flat blade screwdriver 3.5 x 100 mm |
| | MO-65206 Flat blade screwdriver 5.5 x 125 mm |
| | MO-65209 Flat blade screwdriver 8 x 175 mm |

| Reference | Composition |
|-----------|---|
| KIT-07 | MO-66002 Universal pliers overall length 180 mm |
| | MO-66502 Water pump pliers overall length 250 mm |
| | MO-67302 End stripping pliers overall length 160 mm |
| | MO-66402 Bent snipe nose pliers overall length 160 mm |
| | MO-67500 Cable cutter overhall length 170 mm |

| Reference | Composition |
|--|---|
| KIT-04 | MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm |
| | MO-65244 Pozidriv screwdriver N°2 6 x 100 mm |
| | MO-65204 Flat blade screwdriver 3.5 x 100 mm |
| | MO-65206 Flat blade screwdriver 5.5 x 125 mm |
| | MO-65209 Flat blade screwdriver 8 x 175 mm |
| | MO-67302 End stripping pliers overall length 160 mm |
| | MO-66402 Bent snipe nose pliers overall length 160 mm |
| MO-67500 Cable cutter overhall length 170 mm | |

| Reference | Composition |
|-----------|---|
| KIT-05 | MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm |
| | MO-65244 Pozidriv screwdriver N°2 6 x 100 mm |
| | MO-65204 Flat blade screwdriver 3.5 x 100 mm |
| | MO-65206 Flat blade screwdriver 5.5 x 125 mm |
| | MO-65209 Flat blade screwdriver 8 x 175 mm |
| | MO-66002 Universal pliers overall length 180 mm |
| | MO-66502 Water pump pliers overall length 250 mm |
| | MO-67302 End stripping pliers overall length 160 mm |
| | MO-66402 Bent snipe nose pliers overall length 160 mm |
| | MO-67500 Cable cutter overhall length 170 mm |



Low voltage complete set

Complete equipment for live line (L.V.) interventions.



| | | |
|---------------------------|---|---|
| MO-510-03-EX | Tool bag not included (MO-34) | |
| Personal equipment | | |
| MO-11001 | 1 safety glasses | MO-69903 1 right angle hexagonal key wrench 3 mm |
| CG-98 | 1 working gloves | MO-69904 1 right angle hexagonal key wrench 4 mm |
| Voltage detector | | |
| MS-911-EX | 1 voltage multitester | MO-69906 1 right angle hexagonal key wrench 6 mm |
| Insulating | | |
| CG-05-B | 1 rubber gloves size B | MO-751 1 insulating folding rule |
| CG-36 | 1 carrying bag for rubber gloves | MO-69003 1 adjustable spanner 250 mm |
| MP-42/16 | 1 insulating mat | MO-66002 1 universal pliers 180 mm |
| MP-26-A | 10 insulating caps | MO-66202 1 round nose pliers 160 mm |
| MP-35/12 | 1 insulating blanket | MO-66502 1 water pump pliers 250 mm |
| MP-39 | 10 wood clamps for insulating blanket | MO-67102 1 side cutter 160 mm |
| MP-32/15 | 6 line protectors | MO-69308/23 1 sockets 3/8" wrench set with 10 sockets: 8, 10, 12, 13, 14, 17, 19, 21, 22, 23 |
| MP-19 | 5 insulated adhesive tapes | MO-65205 1 flat blade screwdriver 4 x 100 |
| Insulated tools | | |
| MO-61001 | 1 stripping knife | MO-65207 1 flat blade screwdriver 6,5 x 150 |
| MO-67502 | 1 cable cutter 230 mm | MO-65209 1 flat blade screwdriver 8 x 175 |
| MO-68008/19 | 1 open end spanners set with 8, 10, 11, 12, 13, 14, 17, 19 mm open end spanners | MO-65232 1 Phillips screwdriver n° 1 |
| | | MO-65234 1 Phillips screwdriver n° 2 |
| | | MO-65236 1 Phillips screwdriver n° 3 |

Intervention kit for electricians

| | | |
|-----------------|---------------------------------------|--|
| MO-38510 | Composition: | |
| M-87370 | 1 Tool bag | MO-65244 Pozidriv screwdriver N°2 6 x 100 mm |
| CG-05-C | 1 Pair of insulated gloves | MO-66002 Universal pliers overall length 180 mm |
| MO-11001 | 1 Safety glasses | MO-66502 Water pump pliers overall length 250 mm |
| AL-230 | 1 Safety padlock | MO-67302 End stripping pliers overall length 160 mm |
| MO-65204 | Flat blade screwdriver 3.5 x 100 mm | MO-66402 Bent snipe nose pliers overall length 160 mm |
| MO-65206 | Flat blade screwdriver 5.5 x 125 mm | MO-67500 Cable cutter overall length 170 mm |
| MO-65209 | Flat blade screwdriver 8 x 175 mm | |
| MO-65242 | Pozidriv screwdriver* N°1 4.5 x 80 mm | |



The world

of electrical safety



OIL & GAS

Offshore installations, shipbuilding, heavy industry



Your major supplier for
all your electrical safety equipment needs




Just contact us !

CATUTM

Medium voltage




From 1kV to 52kV

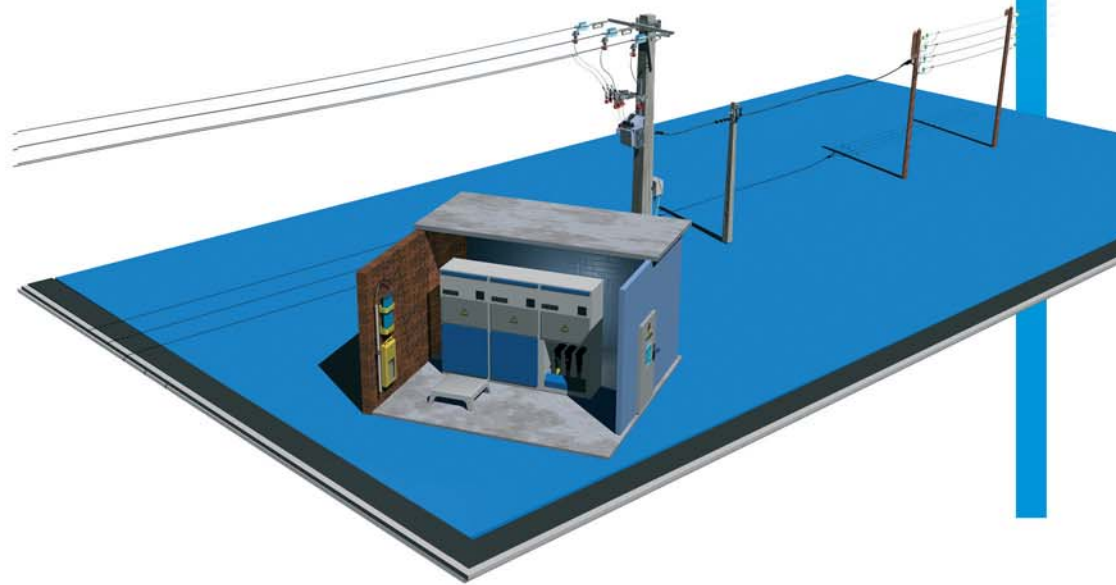

| | |
|---------------------------------------|----|
| Equipment guide | 54 |
| Personal protective equipment | 58 |
| Substation equipment | 67 |
| Voltage detectors | 79 |
| Short-circuiting and earthing systems | 84 |
| General tools | 91 |
| Earth rods | 96 |

Examples of usual applications

Overhead line work from pole

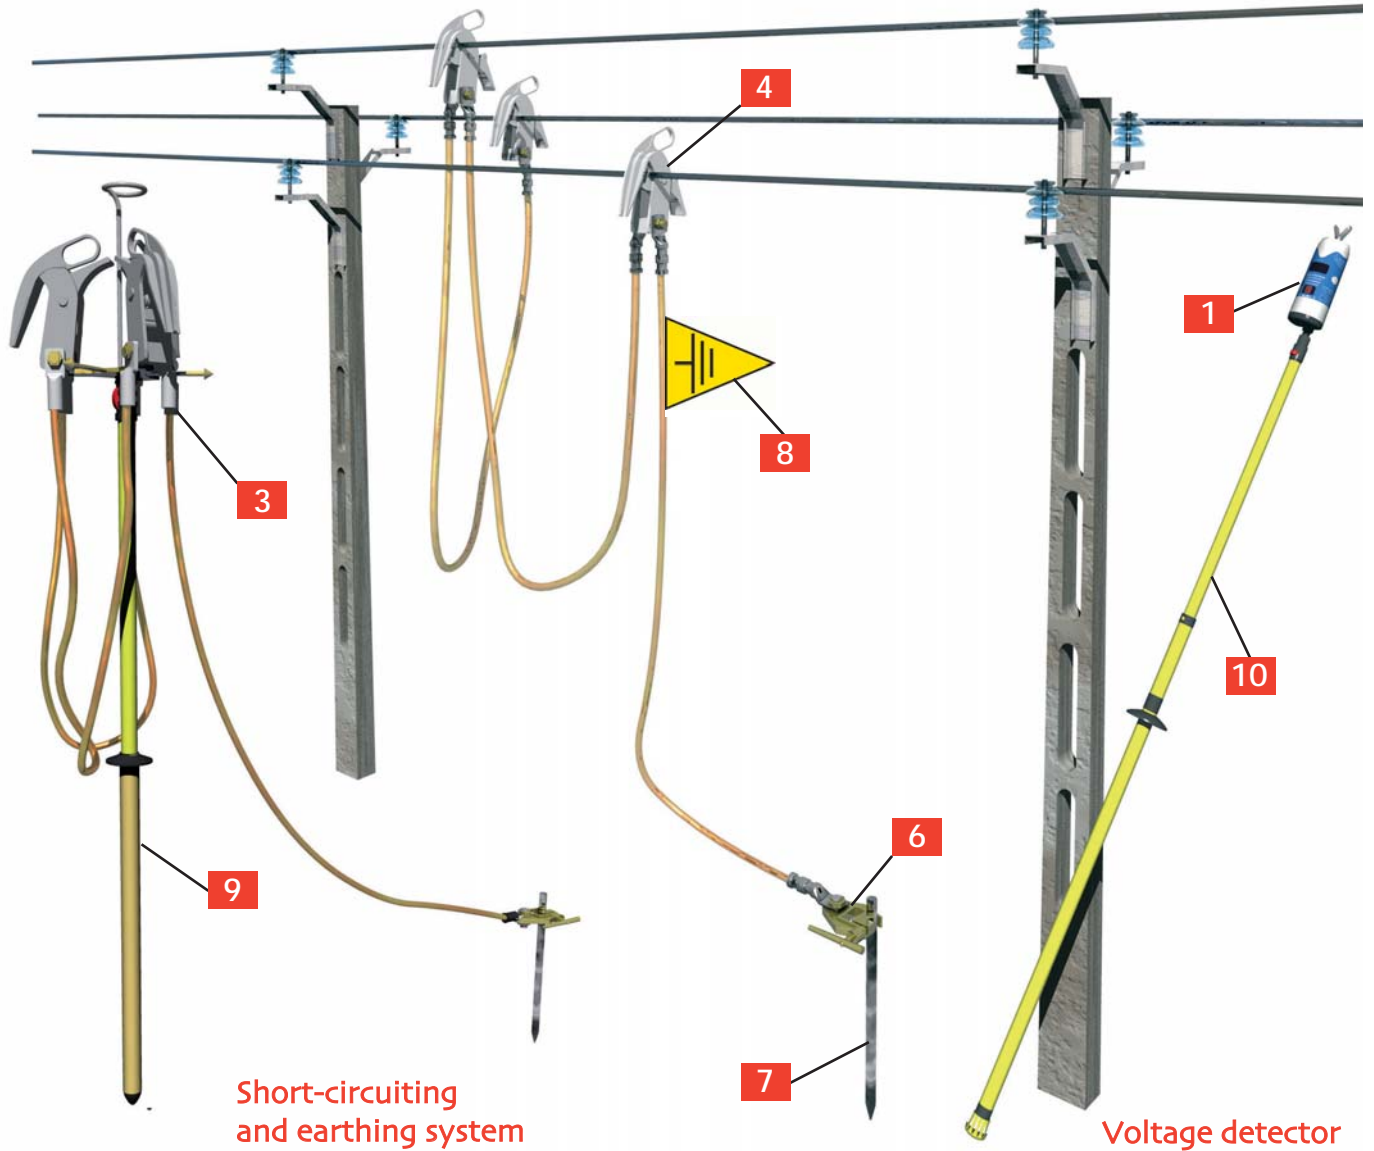

Short-circuiting and earthing system

Voltage detector

Voltage detectors and phase comparators

| | | | |
|---|--|--------------------------|----------|
| 1 | Electronic voltage detectors IEC or standard | References: CC-875 serie | Page: 79 |
| 2 | Single pole phase comparator | Reference: CL-7 serie | Page: 83 |


Short-circuiting Systems

| | | | |
|---|--|-----------------------------|----------|
| 3 | IEC short-circuiting and earthing systems: Three-phase crossarm networks (work from pole) | References: MT-6613 serie | Page: 85 |
| 4 | Clamps and spare parts | | Page: 86 |
| 5 | Short-circuiting and earthing systems: Mid-span horizontal configurations (Work from ground) | References: MT-512/.. serie | Page: 87 |

APPLICATIONS

Before intervention select the right personal protective equipment

Overhead line work from ground

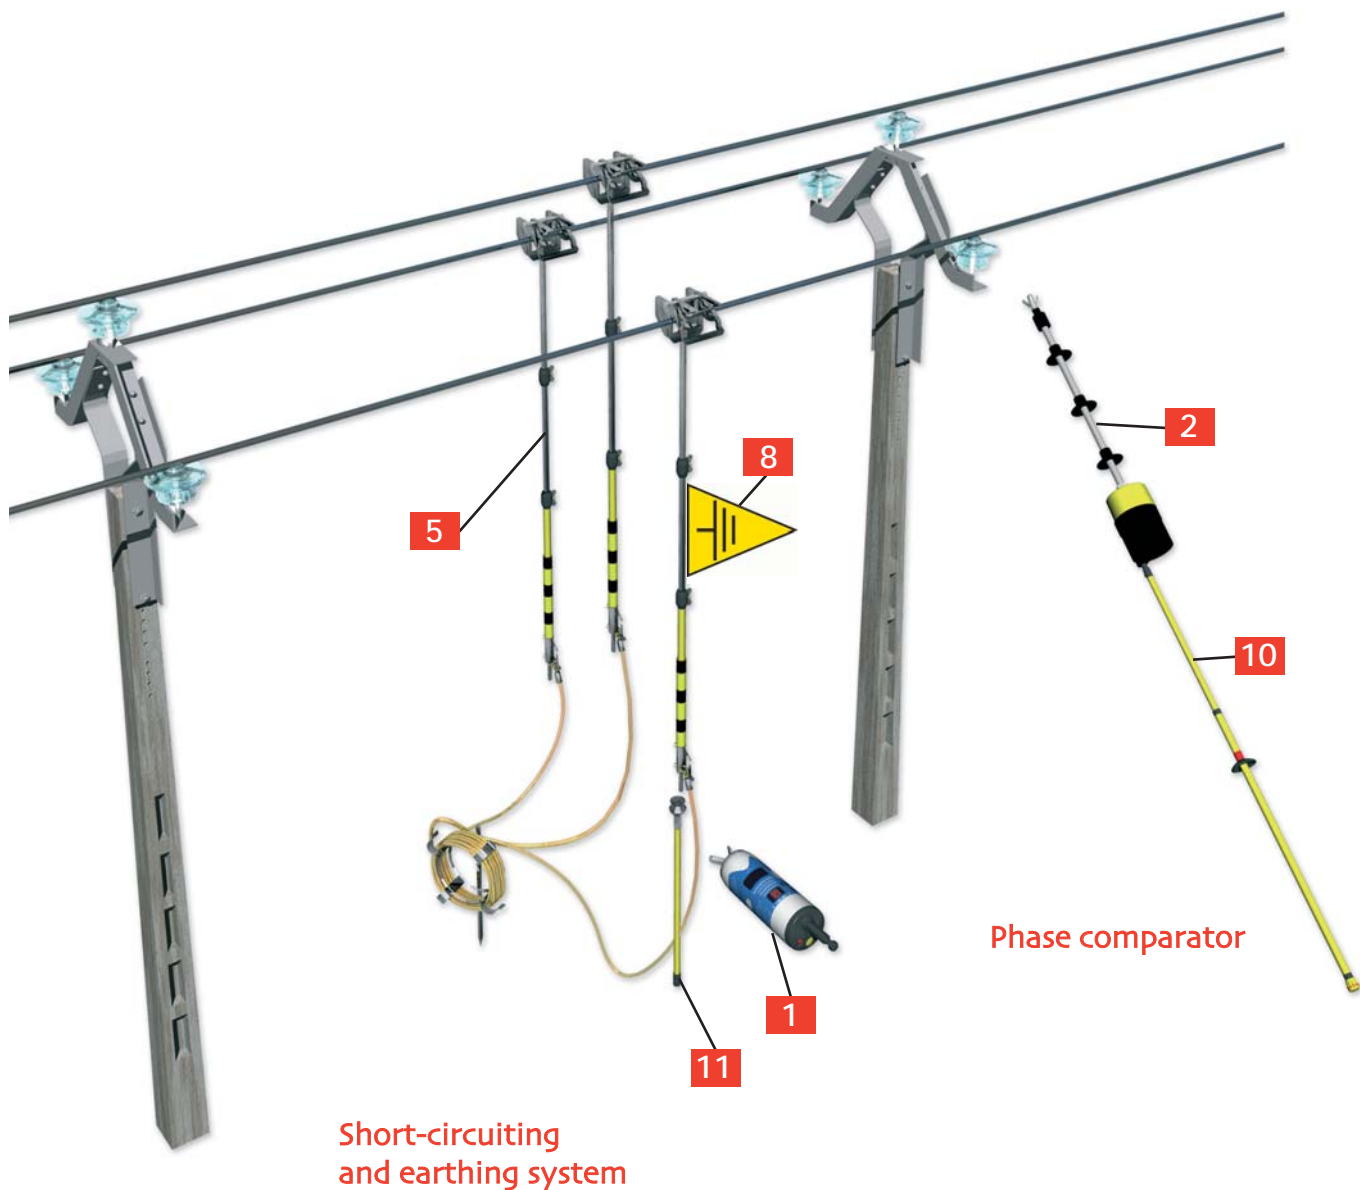

Short-circuiting and earthing system

Phase comparator

Medium voltage

Earth Clamps, rod and flags


| | | | |
|----------|--------------|------------------------------|----------|
| 6 | Earth Clamps | References: MT-840/1, MT-843 | Page: 86 |
| 7 | Earth rods | References: MT-650, MT-652/2 | Page: 86 |
| 8 | Earth Flags | References: AL-58, AL-60 | Page: 70 |

Insulating sticks

| | | | |
|-----------|--|---------------------------------|-----------|
| 9 | Insulating Sticks IEC For short-circuiting systems and Voltage detectors | References: CM-4, CM-7, CM-4000 | Pages: 88 |
| 10 | Insulating sticks IEC for voltage detectors | References: CE-4-21, CE-75 | Page: 81 |
| 11 | Insulating sticks for short circuiting system MT-512 | Reference: MT-531 | Page: 87 |

Examples of usual applications

Substation with Bare conductors

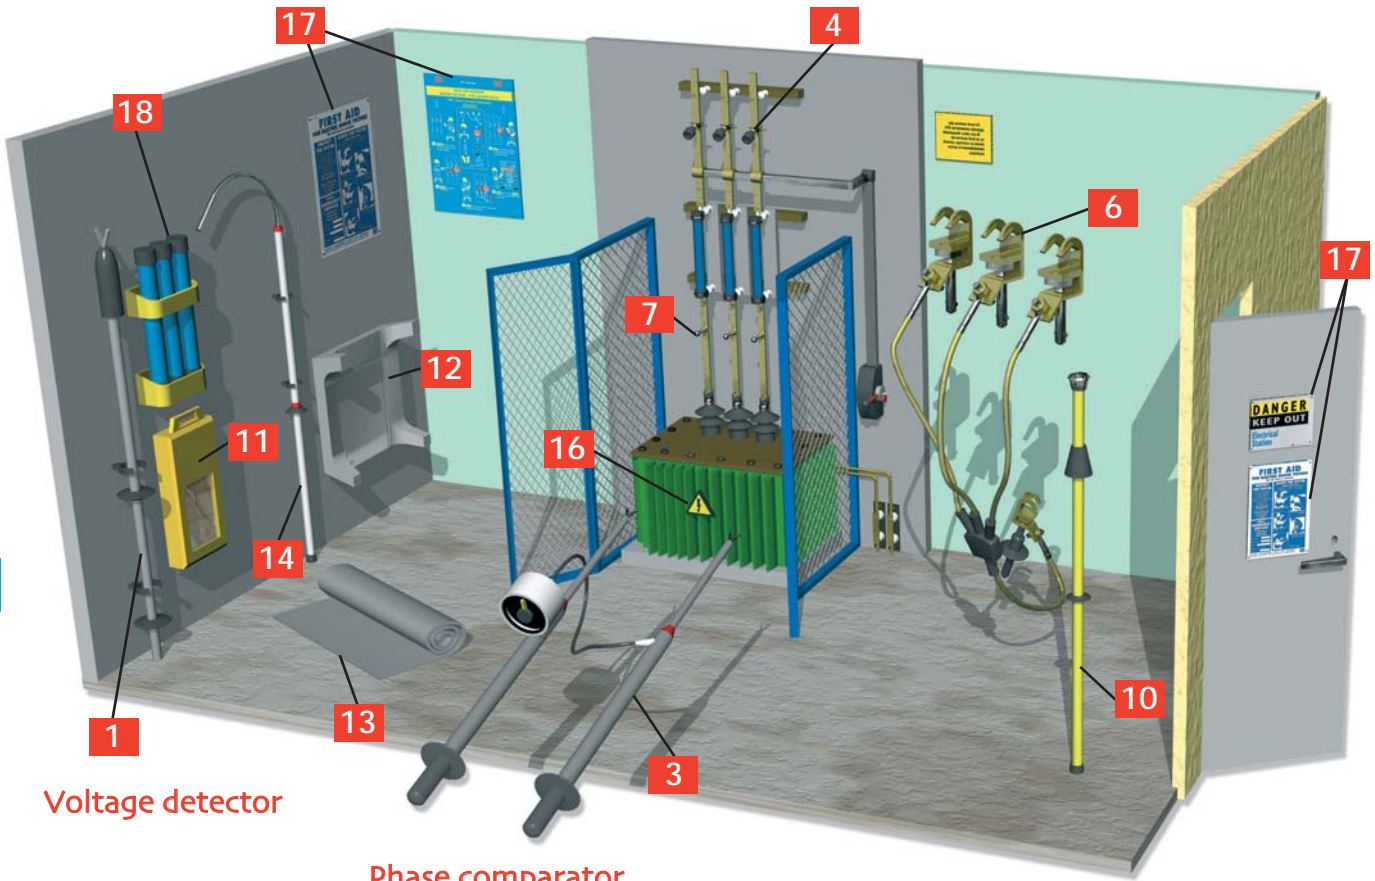

Voltage detector

Phase comparator

Short-circuiting and earthing system

Voltage detectors and phase comparators


| | | | |
|---|--|-------------------------------------|--------------|
| 1 | Voltage detectors for indoor use 5-40 kV | References: CL-4, CL-2 series | Page: 76 |
| 2 | Voltage detector for separable connectors | Reference: CC-151-K | Page: 76 |
| 3 | Phase comparators two poles or single pole | References: CL-5, CL-8, CL-7 series | Pages: 82/83 |
| 4 | Permanent luminous indicator | Reference: CL-40010 | Page: 76 |
| 5 | Integrated systems VIS VDS | References: CL-495, CL497, CL-498 | Page: 77 |

Short-circuiting Systems

| | | | |
|---|--|--|----------------------|
| 6 | Short-circuiting system for MV substations: For installation on permanent fixed points For installation on bare conductors | References: MT-1910/MT-1920 References: MT-5805/MT-9801 | Page: 72 Page: 72 |
| 7 | Fixed points | References: MT-2950/MT-3950 series | Page: 72 |
| 8 | Short-circuiting system for switchgear: For 250 A separables connectors For 400 A separables connectors | Reference: MT-8612 Reference: MT-8614 | Page: 75 Page: 75 |

Before intervention select the right personal protective equipment

Substation with switchgear and metalclad switchgear

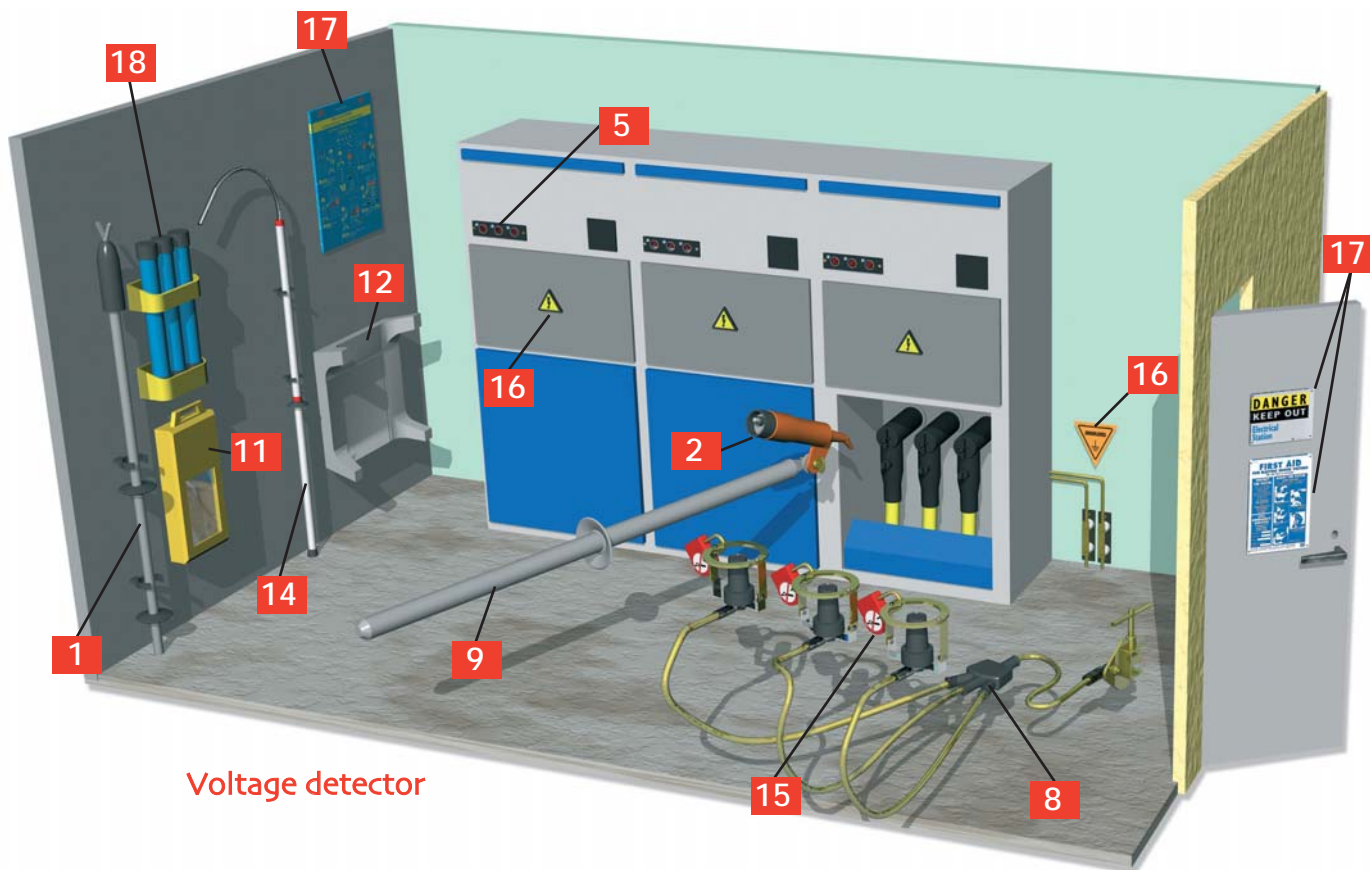

Voltage detector

Short-circuiting and earthing system

Insulating sticks

| | | | |
|-----------|---|--------------------------------|----------|
| 9 | Insulating stick for CC-151-K voltage detector | Reference: CC-45-K | Page: 76 |
| 10 | Insulating sticks for substations use IEC-61235 | References: CF-5-40/CE-4-21... | Page: 81 |

Protective equipment

| | | | |
|-----------|---|---------------------------|----------|
| 11 | Insulating rubber gloves 26500 V with storage box | References: CG-30/CG-35/1 | Page: 60 |
| 12 | Insulating Platform 24000 V | Reference: CT-7-25/1 | Page: 61 |
| 13 | Insulating mat 26.5 kV | Reference: MP-42/11 | Page: 61 |
| 14 | Rescue stick 45 kV | Reference: CS-45 | Page: 71 |

Warning signs and accessories

| | | | |
|-----------|----------------------------|--------------------------------|----------|
| 15 | Safety padlock | Reference: AL-230/.. | Page: 67 |
| 16 | Warning signs in aluminium | References: AM-49/1, AM-344-GB | Page: 69 |
| 17 | Specialised signs | References: AP-510-GB/AM-20-GB | Page: 69 |
| 18 | Fuse holder | Reference: CI-23 | Page: 71 |

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. Caution: Do not use for welding operations.

EN 166/EN 170
CE



MO-11000 Clear lenses, delivered in pouch

MO-11001 Tinted lenses, delivered in pouch

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. Caution: Do not use for welding operations.

EN 166/EN 170
CE



MO-11010 Clear lenses

MO-11011 Green tinted lenses

ABS helmet

Electrically insulating helmets for use on voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit - headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg.

EN 397
EN 50365
ANSI Z89.1:2003
Class E 20 kV
CE



MO-182/1-B White

MO-182/1-R Red

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0,465 Kg.

EN 397
CE



MO-183-BL White, single size, adjustable

MO-183-RL Red, single size, adjustable

Face shield

Face shield adjustable on MO -182 helmet. 100% UV protection. Weight: 0.170 kg. Caution: Do not use for welding operations.

EN 166/EN 170
CE



MO-184 Single size, adjustable by rubber band

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg.

EN 166/EN 170/EN 397
EN 50365
CE



MO-185-BL White

MO-185-R Red

MO-185-J Yellow

MO-185-B Blue

M-881622 Spare face shield for MO-185

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Bag for helmet and face shield

Cloth cover for transport and protection of helmets and face shields
MO-182, MO-183, MO-184, MO-185-BL, MO-186.



M-87384

Black colour

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet. **CE**
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.



MS-118

Headlamp - Weight: 0.187 kg

M-95-865

Halogen bulb (sold by set of 5 units)
5.2 V 0.5 A

M-95-864

Hooks set for helmet

LED's Headlamp (3 LED's)

Can be carried either on the head or any kind of helmet. **CE**
- Lighting by 3 high performance LEDs.
- 3 lighting levels.
- Adjustable lamp height angle.
- Very light, waterproof IP65.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 80 hours.



MS-121

Delivered with batteries and a carrying bag
Weight: 0.09 Kg

M-95-864

Hooks set for helmet

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's). **CE**
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting.
IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.



MS-127

Delivered with batteries and a carrying bag
Weight: 226 g

M-95-864

Hooks set for helmet

Intrinsically safe ATEX LED's Headlamp

Ex II 2GD EEx ia IIC T4 **CE**
Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126

Delivered with batteries - Weight: 0,125Kg

M-95-864

Hooks set for helmet

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard. To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter. The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set. Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.



IEC-60903
CE

| Reference | Class | Voltage (V) | Thickness (mm) | Designation | Weight (g) |
|---------------------|-------|-------------|----------------|------------------------------|------------|
| CG-15 (*) | 1 | 7500 | 1.5 | latex | 270 |
| CG-20 (*) | 2 | 17000 | 2.3 | latex | 450 |
| CG-20 (*)-AM | 2 | 17 000 | 2 | Two colors latex rolled edge | 450 |
| CG-30 (*) | 3 | 26500 | 2.9 | latex | 560 |
| CG-30 (*)-AM | 3 | 26500 | 2.7 | Two colors latex rolled edge | 560 |

* References to be completed by size A, B, C, D
Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11

Pneumatic glove tester

For compulsory control of gloves before use. Checking is done by inflating and immersing in water.



CG-117 140 x 150 x 160 mm - Weight: 0.600 kg

Rubber gloves storage box with window

To be placed in high voltage stations. Insulating material, shock resistant, yellow colour. Transparent window (enables to check gloves presence). Bottle of talc included. Attachment: 4 holes 3.5 mm dia., centre distances 155 x 345 mm. U.V. protection window.



CG-35/1 60 x 210 x 460 mm - Weight: 0.730 kg

Overgloves

Used as outer glove. Silicon grain leather, very flexible. Large protective cuff in chrome tanned hide. Adhesive strap.



EN 388
CE

CG-99 (*) Weight: 0.170 kg * Add size: C, D

Undergloves

Cotton undergloves To be used with insulating rubber gloves.



CE

CG-80 ()** ** H: men / F: women

Carrying bag

Made from reinforced waterproof fabric for transport of rubber gloves in vehicles and tool boxes. Rear loop for belt and snaps.



CG-36 60 x 180 x 400 mm - Weight: 0.120 kg

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Working gloves

Handling leather and cotton gloves. Docker type.



EN 388
CE

CG-97-C

Single size (C = 10)

Insulating boots

Made from elastomer canvas support, very flexible and resistant. Anti-perforation stainless steel sole and shell. Anti-slip sole. Protection against step and touch hazardous potential gradients.



EN 345

MV-135*

60 x 210 x 460 mm - Weight: 0.730 kg

* Add sizes: 39-40/41-42-43/44-45-46/47.

Insulating platform (indoor models)

Moulded insulating material, one-piece. Top 50 x 50 cm.



| Reference | Rated insulation (V) | Height (mm) | Weight (kg) |
|------------------|----------------------|-------------|-------------|
| CT-7-25/1 | 24000 | 220 | 3.7 |
| CT-7-40/1 | 40000 | 260 | 3.8 |

Insulating platform (outdoor models)


Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



| Reference | Rated insulation (V) | Number of skirts per foot | Height (mm) | Weight (kg) |
|----------------|----------------------|---------------------------|-------------|-------------|
| CT-9-25 | 24000 | 2 | 350 | 6.00 |
| CT-9-45 | 45000 | 3 | 435 | 6.50 |

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.

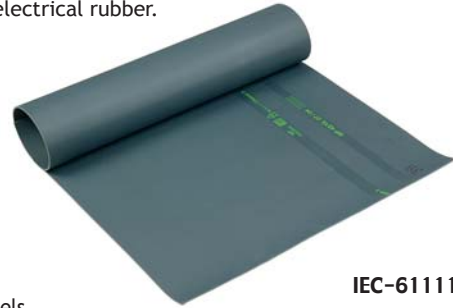

IEC-61111 

Individual models.

| Reference | Thickness (mm) | Class | Network Voltage (kV) | Dimensions (m) |
|-----------------|----------------|-------|----------------------|----------------|
| MP-42/11 | 3 | 3 | ≤ 26.5 | 1 x 1 |
| MP-42/16 | 3 | 3 | ≤ 26.5 | 0.6 x 1 |
| MP-42/66 | 3 | 3 | ≤ 26.5 | 0.6 x 0.6 |

For placing in front of panels.

| Reference | Thickness (mm) | Class | Network Voltage (kV) | Dimensions (m) |
|---------------------|----------------|-------|----------------------|----------------|
| MP-60/03-5 | 3 | 3 | ≤ 26.5 | 0.6 x 5 |
| MP-60/03-10 | 3 | 3 | ≤ 26.5 | 0.6 x 10 |
| MP-100/03-5 | 3 | 3 | ≤ 26.5 | 1 x 5 |
| MP-100/03-10 | 3 | 3 | ≤ 26.5 | 1 x 10 |
| MP-60/05-5 | 5 | 4 | ≤ 36 | 0.6 x 5 |
| MP-60/05-10 | 5 | 4 | ≤ 36 | 0.6 x 10 |
| MP-100/05-5 | 5 | 4 | ≤ 36 | 1 x 5 |
| MP-100/05-10 | 5 | 4 | ≤ 36 | 1 x 10 |

Bags for insulating mats

Specially designed for carrying and protecting insulating mats. Equipped with a shoulder strap and a plastic window for instructions and storage identification.



MP-01

For MP-42/16 and MP-42/66 - Length: 70 cm

MP-02

For MP-42/11 - Length: 110 cm

Multi-pockets electrician bag

Specially designed for carrying and protecting insulating mats, face shield and controllers. Equipped with several pockets.



M-87386

65 x 15 x 25 cm

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

In many countries regulations have been established to protect workers from electrical shock and flash hazards in specific areas within which arc flash protection is required. These equipment must be used with insulating gloves and leather overgloves. Equipment up to 100 cal/cm² on request.

Arc flash face shield kit (10cal/cm²)

Composition of the kit:

- 1 Face shield with chin cup 10cal/cm², absorbs > 99.9% of harmful UV radiation, 70% light transmission, tested to ASTM F2178 specifications
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1, 20kV.
- 1 carrying bag for face shield and helmet



KIT-ARC-01

Weight: 2.1 kg

Arc flash jacket kit (11cal/cm²)

Composition of the kit:

- 1 Face shield with chin cup 10cal/cm², absorbs > 99.9% of harmful UV radiation, tested to ASTM F2178 specifications
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1, 20kV.
- 1 safety glasses EN 166/EN 170
- 1 arc flash protective jacket 11cal/cm² (size L*), ASTM F1506 and NFPA 70E Standards
- 1 carrying bag for face shield and helmet
- 1 all kit carrying bag



KIT-ARC-02

Weight: 4.15 kg

Arc flash protective overall kit (11cal/cm²)

Composition of the kit:

- 1 Face shield with chin cup 11cal/cm², absorbs > 99.9% of harmful UV radiation, tested to ASTM F2178 specifications
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1, 20kV.
- 1 safety glasses EN 166/EN 170
- 1 arc flash protective Hood (15 cal/cm²)
- 1 protective overall 11cal/cm² (size L*), ASTM F1506 and NFPA 70E Standards
- 1 carrying bag for face shield and helmet
- 1 all kit carrying bag



KIT-ARC-03

Weight: 4.03 kg

Arc flash protective hood kit (40cal/cm²)

Composition of the kit:

- 1 arc flash protective hood with an integrated face shield 40cal/cm², ASTM F2178 and NFPA 70E Standards
- 1 arc flash protective coat 40cal/cm², (size L*), ASTM F1506 and NFPA 70E Standards
- 1 arc flash protective bib overall 40cal/cm², (size L*), ASTM F1506 and NFPA 70E Standards
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1, 20kV.
- 1 safety glasses EN 166/EN 170
- 1 carrying bag for face shield and helmet
- 1 all kit carrying bag



KIT-ARC-04

Weight: 6.7 kg

* Size US: L
Other size on request.

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Pro electric full body fall arrest harness

2 fall arrest attachment point: dorsal and sternal. Automatic buckles of the belt and leg loops. Elastic shoulder straps. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Tools holders. 3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.7 kg.



EN 358
EN 361
CE

MO-563(*)

* add size: S/M/XL
S = small M = medium XL = large

Pro electric full body fall arrest harness

4 fall arrest attachment point : one dorsal point, two sternal points by two metallic D rings, a sternal point by strap. A ventral attachment point for a descender and / or lanyard. Automatic buckles of leg loops. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Tools holders. 3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.9 kg.



EN 358
EN 361
EN 813
CE

MO-564(*)

* add size: S/M/XL
S = small M = medium XL = large

Full body fall arrest harness

2 fall arrest attachment point : dorsal and sternal. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Unique size. Delivered in a protective bag.



EN 358
EN 361
CE

MO-71

Weight: 1.9 kg

Equipped rope straps with lever stretcher

Equipped with adjuster. Hooks to belt with rapid link.



EN 358
CE

MO-52-L

Length: 4 m - Weight: 1 kg

Anti-fall grip

The safety block runs freely on its rope but can be automatically locked in case of a sudden downward drop. Must be used only with special 15 mm Ø rope delivered with the device.



EN 353-3
CE

MO-68/10

With 10 m of rope - Weight: 2.300 kg

MO-68/15

With 15 m of rope - Weight: 3.250 kg

Double safety descent device

Articulated stainless steel cam. Aluminium housing. High-resistance handle. Operates with 9-12 mm diameter lanyard. Ideal for evacuation. Lets you regulate descent.



EN 361
CE

MD-02

Weight: 0.32 Kg

Tether rope with energy absorber

Tether rope in polyamide Ø14 mm.



EN 355
CE

MO-52020

Length: 1.50 m

MO-52021

Length: 2.00 m

Double tether rope with energy absorber

Double tether rope with energy absorber. Equipped with 2 steel snap hooks with automatic locking and 1 steel snap hook with screwing locking



EN 355
CE

MO-54010

Length: 1.20 m - Weight: 1.4 kg

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Snap hooks (stainless steel)



MO-54

EN 362
CE

MO-54

Locks with threaded ring - Opening: 15 mm
100 x 58 mm - 0.154 kg



MO-55/1

EN 362
CE

MO-55/1

Locking by screwing ring on a spring loaded mobile catch; an additional catch is provided to prevent the rope from slipping in the carabiner - 155 x 75 mm - 0.140 kg

Snap hooks (aluminium alloy) zical



MO-54000

EN 362

MO-54000

Oval snap hook - Opening: 15 mm
Individually tested - Weight: 0.071 kg
110 x 58 mm



MO-54004

CE

MO-54004

D-shaped snap hook with automatic locking
Opening: 23 mm - Individually tested
Weight: 0.087 kg - 120 x 72 mm

Fall arrester - retractable type

Designed for lineman safety. Quick acceleration causes instant locking. Corrosion protected steel shell. Integrated braking mechanism and dissipating element. Self locking mechanism and automatic tensioning and return facility. Galvanized cable Ø 4 mm. Strength: 1 200 daN. Delivered with a screw crab. Max. length: 10 m.



EN 360

MO-591002

Weight: 7.00 kg

Snap hook with double safety latch



EN 362
CE

Opening: 50 mm
Body in steel
Fingers in stainless steel
Resistance: 20 kN.

MO-54002

Weight: 0.390 Kg

Tether rope equipped with a tension device

The tether rope is intended to ensure that operators are held in position when working at a height. This tether rope must be associated with a harness belt. Ends sewn to form an attachment and protected with a plastic girdle. Static resistance: 15 kN. Polyamide Ø 15 mm.



EN 358
CE

MO-56009

Weight: 1.425 kg - Length: 3 m

MO-56010

Weight: 1.600 kg - Length: 5 m

Safety rope with wear tell tales

Rope: 14 PEPT multi-filament (15 mm diam.)
Two-colour safety rope, 100% polyester made of 3 white strands with black central thread (wear telltale).
Buckle: Polyamide central lug attaches to snap-hook of belt.



EN 354
CE

MO-052

Safety rope only - Length: 4 m - 0.76 kg

Lanyard

Synthetic fibre ropes - 10 mm. Loops spliced at both ends. Delivered without snap hook.



EN 354
CE

MO-53

Length: 1.50 m - Weight: 0.125 kg

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Anti fall device with automatic release strap

Winder with self-locking strap.
Length: 2 m.
Equipped with shock absorber.
Allows 2 m of movement autonomy around anchoring point.



EN 360

MO-591000 Weight: 1.160 kg

Constraint tie

Tie in polyamide.

EN 795
CE



MO-52031 Length: 0.8 m - Weight: 0.100 kg

MO-52033 Length: 1.20 m - Weight: 0.135 kg

MO-52034 Length: 1.50 m - Weight: 0.150 kg

Snap hook with stick adapter

| Reference | Characteristics | |
|------------------|------------------|------------------|
| MO-54005 | Opening: 50 mm | Weight: 0.500 kg |
| CE-5-90-C | Length: 9 m max. | Weight: 4 kg |

* Other length, see page 89.



Working on pole kit



| Reference | Use |
|------------------------|---|
| KIT-HAUT-01-(*) | To go up a pole with insulating ladders |
| KIT-HAUT-02-(*) | To go up a pole with spliced ladders |
| KIT-HAUT-03-(*) | To go up a catenary |
| KIT-HAUT-04-(*) | To go up on a pylon |
| KIT-HAUT-05-(*) | To go up on a roof |
| KIT-HAUT-06-(*) | To go up using a nacelle |

| Composition | KIT-HAUT- | | | | | |
|---|-----------|--------|--------|--------|--------|--------|
| | 01-(*) | 02-(*) | 03-(*) | 04-(*) | 05-(*) | 06-(*) |
| Harness MO-563 | ■ | ■ | ■ | | | |
| Harness MO-564 | | | | ■ | | |
| Harness MO-71 | | | | | ■ | ■ |
| Tether rope MO-52020 | ■ | | | | | ■ |
| Double tether rope MO-54010 | | ■ | | ■ | ■ | |
| Constraint tie MO-52034 | ■ | ■ | | | | |
| Constraint tie MO-52031 | | | | ■(2) | | |
| Tether rope with tension device MO-56009 | ■ | ■ | ■ | ■ | ■ | |
| Anti-fall grip MO-68/15 | ■ | ■ | ■ | ■ | | |
| Snap hook MO-54 | ■ | ■ | | | | |
| Carrying bag M-87-295 | ■ | ■ | ■ | ■ | ■ | ■ |

(* add size : M or XL
order example : KIT-HAUT-02-XL.

Insulating ladders

A complete range with top quality features: Insulation between two steps: 30000 V (test performed after immersion in water for 24 hours). High mechanical resistance to bending and twisting. Good resistance/weight ratio. High fire resistance. High resistance against bad weather and corrosive elements. Lateral risers in polyester/glass fiber rectangular section 70 x 25 mm. Aluminium alloy rungs with square 29 x 29 mm section and anti-slip coating.



EN 131
CE

Insulating 2 section extension ladders, hand operated

| Reference | Folded length | Extended length | Number of rungs | Weight (kg) |
|-----------------|---------------|-----------------|-----------------|-------------|
| MP-514/2 | 2.41 (m) | 4.09 (m) | 2 x 8 | 13.9 |
| MP-515/2 | 2.97 (m) | 5.21 (m) | 2 x 10 | 17 |

Insulating 2 section extension ladders, rope and pulley operated

| | | | | |
|-----------------|----------|-----------|--------|----|
| MP-506/2 | 3.53 (m) | 6.05 (m) | 2 x 12 | 20 |
| MP-508/2 | 4.66 (m) | 8.30 (m) | 2 x 16 | 31 |
| MP-510/2 | 5.78 (m) | 10.26 (m) | 2 x 20 | 38 |



Forged steel climbers for round wooden poles

Hard forged steel - Leather belts with cast buckles. Delivered by pair.



| | |
|--------------|-------------------------------------|
| MO-24 | Ø 20 cm - 2.6 kg - Pair of climbers |
| MO-25 | Ø 25 cm - 2.8 kg - Pair of climbers |
| MO-26 | Ø 30 cm - 3.0 kg - Pair of climbers |
| MO-35 | Ø 35 cm - 3.2 kg - Pair of climbers |

Mechanical climbers for round and hexagonal concrete poles

Manual locking
Adaptable to the pole diameter
For poles Ø 140 to 300 mm.



| | |
|----------------|-----------------------------------|
| MO-16-A | Pair of climbers - Weight: 6.5 Kg |
|----------------|-----------------------------------|

Mechanical climbers for rectangular shaped concrete poles

Automatic locking of jaws by elastic cord.
Sole in aluminium alloy, high resistance, with leather belts and steel buckle.
Wear plate placed on sole arm.
Mobile drum on axis can be removed; processed steel rollers.
High resistance aluminium alloy rack, used for clamping onto poles 14 to 42 cm wide.



Spare parts:
MO-17-01: pair of elastic cords
MO-17-02: pair of wear plates
MO-17-03: blade roller
MO-17-04: pair of runners

| | |
|----------------|---------------------------------|
| MO-17-A | Pair of climbers - Weight: 9 kg |
|----------------|---------------------------------|

Climbers for H profile metallic poles

Hard forged steel.
Delivered by pair.



| | |
|--------------|------------------------------------|
| MO-23 | Pair of climbers - Weight: 5.10 kg |
|--------------|------------------------------------|

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Padlocks

Padlocks with warning signs

Brass ring bow 50 or 70 mm.
Diameter of the ring bow 4 or 6 mm.



| Reference | Ring bow (mm) | Ø (mm) | Weight (kg) |
|------------------------|---------------|--------|-------------|
| AL-230-(*)-EX | 50 | 6 | 0.170 |
| AL-230-S-(*)-EX | 70 | 6 | 0.190 |
| AL-230-Z-EX | 50 | 6 | 0.170 |
| AL-230-S-Z-EX | 70 | 6 | 0.190 |
| AL-240-(*)-EX | 50 | 4 | 0.170 |
| AL-240-S-(*)-EX | 70 | 4 | 0.190 |
| AL-240-Z-EX | 50 | 4 | 0.170 |
| AL-240-S-Z-EX | 70 | 4 | 0.190 |

* Add n° of key: 111 or 222
"00" n° standard key: n° of key upon request
Z: random n° of key

Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.



AS-404

4 markers in assorted colours (red, black, blue and green)

Safety locking badge

Fit with multiple locking apparatus AL-202
White letters on red aluminium
Fixing with 1 hole Ø 10 mm.



AM-467-GB

Ø 80 mm

Handle with 6 padlocks

Handle of moulded plastic for holding up to six padlocks.
Compartment with transparent cover for key storage.



| Reference | Weight (kg) | Handle with 6 padlocks |
|------------------------|-------------|------------------------|
| AL-236-111-EX | 1.150 | AL-230-111-EX |
| AL-236-S-111-EX | 1.210 | AL-230-S-111-E |
| AL-236-222-EX | 1.150 | AL-230-222-EX |
| AL-236-S-222-EX | 1.210 | AL-230-S-222-EX |

Multiple locking apparatus

Holds up to four padlocks and a sign.



AL-200



AL-202

AL-200

100 x 60 x 10 mm - Weight: 0.150 kg

AL-202

165 x 50 x 12 mm - Weight: 0.200 kg

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



AL-207/10

For 10 padlocks - Weight: 0.06 kg

AL-207/30

For 30 padlocks - Weight: 0.130 kg

Self adhesive warning signs

Complete range of self adhesive, warning signs conditioned in box of 20, 30 or 50 units.



| Reference | Dimensions | Characteristics | Quantity/box |
|-----------|-------------|-------------------|--------------|
| AT-41/025 | 25 mm side | self adhesive PVC | 50 |
| AT-41/05 | 50 mm side | self adhesive PVC | 30 |
| AT-41/1 | 100 mm side | self adhesive PVC | 20 |
| AT-49/025 | 25 mm side | self adhesive PVC | 50 |
| AT-49/05 | 50 mm side | self adhesive PVC | 30 |
| AT-49/1 | 100 mm side | self adhesive PVC | 20 |
| AT-50/025 | 25 mm side | self adhesive PVC | 50 |
| AT-50/053 | 50 mm side | self adhesive PVC | 30 |
| AT-50/1 | 100 mm side | self adhesive PVC | 20 |
| AT-51/025 | 25 mm side | self adhesive PVC | 50 |
| AT-51/05 | 50 mm side | self adhesive PVC | 30 |
| AT-51/1 | 100 mm side | self adhesive PVC | 20 |
| AT-52/05 | 50 mm side | self adhesive PVC | 30 |
| AT-52/1 | 100 mm side | self adhesive PVC | 20 |
| AT-53/05 | 50 mm side | self adhesive PVC | 30 |
| AT-53/1 | 100 mm side | self adhesive PVC | 20 |
| AT-54/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-54/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-55/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-55/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-56/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-56/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-57/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-57/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-58/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-58/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-59/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-59/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-60/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-60/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-61/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-61/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-62/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-62/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-63/05 | Ø 50 mm | self adhesive PVC | 30 |
| AT-63/1 | Ø 100 mm | self adhesive PVC | 20 |
| AT-66/1 | 100 mm side | self adhesive PVC | 10 |



"Customize your labels! On request"

Available on request: Self adhesive rigid plastic warning signs. High Quality, strong sticking on every surfaces: concrete, painted wall, metal, wood, plastic, glass.

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S


Saving kits

Substation signs

Warning signs

| Reference | Type | Dimensions | Characteristics |
|------------------|-----------|-------------|--|
| AM-41/1* | aluminium | 100 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-41/2 | aluminium | 200 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-49/1* | aluminium | 100 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-49/2 | aluminium | 200 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-344-GB | aluminium | 100 mm side | black letters on yellow fixing: 3 holes Ø 4.5 mm |
| AM-345-GB | aluminium | 100 mm side | black letters on yellow fixing: 3 holes Ø 4.5 mm |
| AM-344/05 | aluminium | 50 mm side | |
| AM-344 | aluminium | 100 mm side | |

*Pack of 10 units.

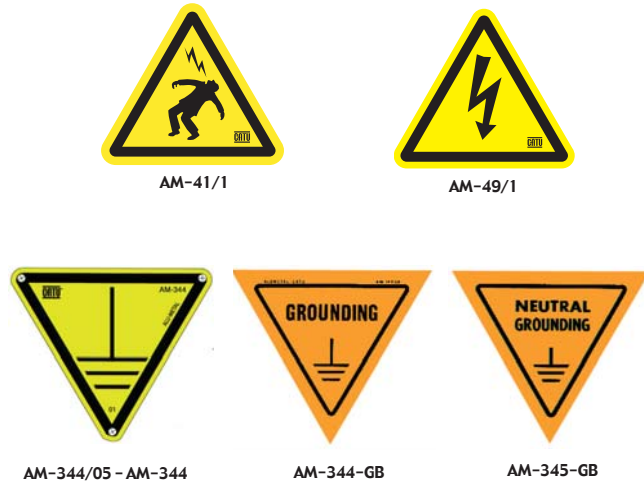

Specialized signs

| Reference | Type | Dimensions | Characteristics |
|--------------------|-----------|--------------|---------------------------------|
| AM-20-GB | aluminium | 350 x 250 mm | blue letters on plain aluminium |
| AM-20-RM | aluminium | 350 x 500 mm | blue letters on plain aluminium |
| AM-61-GB | aluminium | 150 x 200 mm | |
| AM-61-RM | aluminium | 150 x 200 mm | |
| AM-215-RM | aluminium | 350 x 250 mm | black on yellow SF6 warning |
| AM-282/2-RM | aluminium | 200 x 60 mm | |
| AM-7002 | aluminium | 300 x 200 mm | black on yellow |
| AM-33/3 | aluminium | Ø 300 mm | red-black on alu |
| AM-34/2 | aluminium | Ø 200 mm | red-black on alu |
| AM-32/3 | aluminium | Ø 300 mm | |
| AP-510-GB | plastic | 420 x 297 mm | golden rules |
| AP-951/2 | plastic | 200 x 200 mm | red on white |



Other models, please consult us!



AP-951/2



AM-33/3



AM-34/2



AM-32/3



AM-61-GB



AM-61-RM

Medium voltage

Warning sign

Attachment: one hole Ø 10 mm.
Marking for indelible writing: see page ??.



AP-499/1

| Reference | Type | Ø (mm) |
|-----------------|---------|--------|
| AP-499/1 | plastic | 100 |

Warning flags

Brightly colored ribbon.




AL-53

| Reference | Dimensions (mm) | Fixing |
|--------------|-----------------|-----------|
| AL-53 | 650 x 350 | on handle |

Grounding flags



AL-60



AL-58

| | |
|--------------|---|
| AL-58 | Fixing on handle; for work site |
| AL-60 | Fixing on earthing cable; for immediate identification in open-type switchgears possible inscription: 0 to 99 (by using ALU-SCRIPT markers) |

Safety boundary post

For temporary installation.
Used with tough link chain delineators (AL-32/05)
Removal Foot.
Ø 50 mm.
Height: 0.9 m.



AL-316

AL-318

| | |
|---------------|-----------------------------------|
| AL-316 | Red and white - Weight: 4.2 kg |
| AL-318 | Black and yellow - Weight: 4.2 kg |

Chain delineators

Polyamide chains.



AL-31/25



AL-32/05

| | |
|-----------------|--------------------------------|
| AL-31/25 | Red and white - Length: 25 m |
| AL-31/05 | Red and white - Length: 5 m |
| AL-32/05 | Black and yellow - Length: 5 m |
| AL-31 | Opening ring for AL-31/25 |

Delineators

Brightly colored ribbon.
Snap hook on one ribbon end and another on spool.
A ring on spool brakes ribbon at desired length.
wide: 50 mm
length: 20 m.



AL-62-A



AL-63-A

| | |
|----------------|---------------|
| AL-62-A | Red ribbon |
| AL-63-A | Yellow ribbon |

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Intervention kits



CG-35/1




CG-30 (IEC 60903)



CI-23



CT-7-25/1

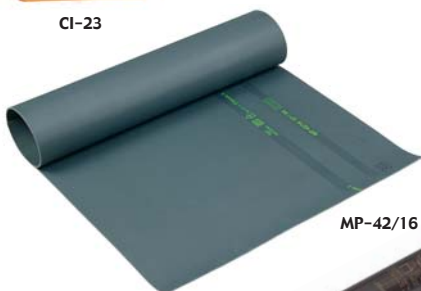

MP-42/16



MP-20

CS-45

Composition of the kits

| Reference | Composition | Characteristics | Dimensions |
|------------|---------------------------------------|----------------------|--------------------|
| CG-30-C | Insulating rubber gloves | 26 500 V max | size 10 |
| CG-35/1 | Rubber gloves storage box with window | | 60 x 210 x 460 mm |
| CI-23 | Fuse holder | | 90 x 240 x 260 mm |
| CS-45 | Rescue stick | 45 kV | 1.65 m |
| CI-06-D | Wall mounted supports | Delivered with CS-45 | |
| CT-7-25/1* | Insulating platform | 24 000 V max | 500 x 500 x 220 mm |
| MP-42/16** | Insulating MAT | ≤ 26,5 kV | 0.6 x 1 mm |

KIT-01*

Intervention kit with insulating platform

KIT-10**

Intervention kit with insulating mat delivered with a protective P.V.C. container

Safety lamps

For MV indoor substations.



CD-122



CD-124


CD-122

Halogen lamp - Automatic switch on in case of power break
Adjustable flood beam - power beam: 5.5 W
Operates: 3 hours - Weight: 1.2 kg

CD-124

Delivered with a wall mounted support
Bulb: 6 W/12 W
Operates: 1 hour (12 W), 2 hours (6 W)
Rechargeable on 230 V 50/60 Hz
3 positions switch: Off, 6 W, 12 W
100 x 190 x 220 mm - Weight: 1.9 kg

Intrinsically safe ATEX torch light

 II 2GD EEx ibe IIC T4 or T6.
Zone 1 and 2 - 21 and 22.

- Simple optical system.
- Power supply by 1.5 V LR20 batteries (x3).
- Bulb P13, 559 - 3.7 V - 0.3 A.
- IP 66.




CD-103

Torchlight Ø 50 x 244 mm - Weight: 0.250 kg

MS-115-1

Bulb for CD-103 (ordering by 5)

Double optical systems.

 II 2GD EEx ibe IIC T6 or T4 or T3.
Zone 1 and 2 - 21 and 22.

Protection mode (suitable for all areas and gases).

Appropriate certificates for Merchant Marine and VERITAS.

Power supply by 1.5 V LR20 batteries (x2).

Fixed light or intermittent optical signals.

IP 66/68.



CD-104

Dimensions: 230 x 90 x 90 mm - Weight: 400 g

Intrinsically safe ATEX LED's Headlamp

 II 2GD EEx ia IIC T4. 

Can be carried either on the head or any kind of helmet.

- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126

Delivered with batteries - Weight: 0,125Kg

M-95-864

Hooks set for helmet

IEC short-circuiting and earthing systems for MV substations

These equipment are intended for connection: to permanent fixed points or to bare conductors. They consist of 3 contact clamps.

IEC-61230

1 short-circuit earthing connection set consisting of 3 extra-flexible copper cables with silicone sheath, L = 1.5 m each. 1 trifurcation connector earthed by an extra-flexible copper cable with silicone sheath, L = 2.5 m. 1 earthing clamp. 1 plastic case (M-78665).

Installation on permanent fixed points

Installation on bare conductors



Plastic case
M-78665 included



Plastic case
M-78665 included



MT-1910
MT-1920

CE-5-40-E



MT-5805

CF-4-21-C

| Reference | MT-1910 | MT-1920 |
|------------------------------|---|--|
| Icc (kA/1s) | 20 | 30 |
| Installation on fixed points | Ø 20 mm MT-2951 range | Ø 25 mm MT-3951 range |
| Composition | 3 clamps MT-1911-E 1 MT-1911 | 3 clamps MT-1921-E 1 MT-1921 |
| Connection set | 3 cables 95 mm ² 1 earth cable 35 mm ² | 3 cables 150 mm ² 1 earth cable 50 mm ² |
| Sticks** | CF-5-40-E | CF-5-40-E |

** Stick to be ordered separately

For earthing systems to your own specifications, please see page 119.

| Reference | MT-5805 | MT-9801 |
|-----------------|---|--|
| Icc (kA/1s) | 20 | 10 |
| Conductors (mm) | ● Ø 5-35 ■ 16-40 5-35 | ● Ø 5-16 ■ 0-16 40-16 ● Ø 5-28 |
| Composition | 3 clamps MT-815-C 1 earth clamp MT-840/1 | 3 clamps MT-817-C 3 clamps MT-814/2 1 earth clamp MT-840/1 |
| Connection set | 3 cables 95 mm ² 1 earth cable 35 mm ² | 3 cables 50 mm ² 1 earth cable 25 mm ² |
| Sticks** | CE-4-21-C | CE-4-21-C |

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Clamps for MV installations and substations

Attachment (C-Type)

Hexagonal end-fitting. A circumferential braking system prevents the clamp from turning under the weight of the cable. Separates by simple pulling.

Earth cable connection

With a crimped lug (12 mm Ø hole).

Material


Aluminium alloy except MT-814, MT-1911 and MT-1921: copper-aluminium bronze.

| Reference | Weight (kg) | Dimensions (mm) | Conductors (mm) | Test current (kA/1s) |
|---------------------------------------|-------------|--|-----------------------|----------------------|
| MT-812-C | 0.320 | 35 x 79 x 143 | • Ø 5-16 — 0-16 | 21 |
| MT-813-C | 0.330 | 35 x 79 x 169 | • 40 x 16 | 21 |
| MT-814/2 | 0.660 | 85 x 56 x 192 | • Ø 5-28 | 14.5 |
| MT-817-C | 0.330 | 30 x 90 x 140 | • Ø 5-16 — 40 x 16 | 21 |
| MT-814/3 | 0.620 | 85 x 56 x 195 | • Ø 18-33 | 14.5 |
| MT-815-C | 0.650 | 44 x 108 x 173 | • 5-35 | 30 |
| MT-815-E | | | — 16-40 | |
| MT-815-S | | | • 5-35 | |
| MT-815-S1 | | | — 16-40 | |
| MT-1911-E MT-1911-S1 | 0.580 | For permanent fixed point Ø 20 mm and round conductors Ø 8 to 18 mm | | 20 |
| MT-1921-E MT-1921-S1 | 0.69 | For permanent fixed point Ø 25 mm and round conductors Ø 10 to 25 mm | | 30 |



Earth clamps

Copper aluminium bronze earth clamps.

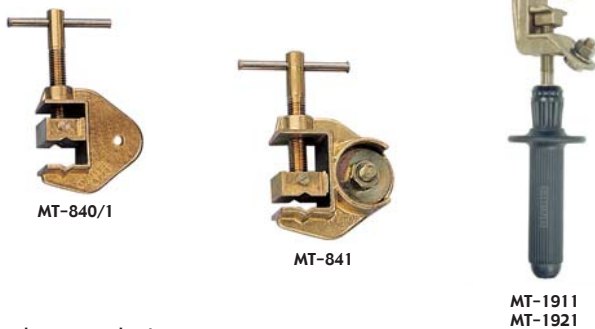

For bare conductors.

| Reference | Weight (kg) | Connection | Conductors (mm) |
|-----------------|-------------|---------------------------------------|--------------------|
| MT-840/1 | 0.48 | Connector: TO-08 - 35 mm ² | • Ø 6-25 — 0-25 |
| MT-841 | 0.48 | Connector: ≤ 50 mm ² | • Ø 6-25 — 0-30 |

For fixed point.

| Reference | Weight (kg) | Connection conductors (mm) |
|----------------|-------------|---|
| MT-1911 | 0.58 | Spheric fixed points MT-2951 Ø 20 mm Round conductors Ø 8 to 18 mm |
| MT-1921 | 0.69 | Spheric fixed points MT-3951 Ø 25 mm Round conductors Ø 10 to 25 mm |

Fixed points



For flat conductors.

| Reference | Sphere dimension | Weight (g) | Fixing |
|--------------------|------------------|------------|------------------------|
| MT-2951 | Ø 20 mm | 130 | Thread: M 12 |
| MT-2951/1 | Ø 20 mm | 180 | Bolt: M 12 - L = 35 mm |
| MT-2951/2 | Ø 20 mm | 200 | Bolt: M 12 - L = 45 mm |
| MT-2950/35* | Ø 20 mm | 247 | Bolt: M 12 - L = 35 mm |
| MT-3951 | Ø 25 mm | 240 | Thread: M 12 |
| MT-3952 | Ø 25 mm | 240 | Thread: M 16 |
| MT-3951/1 | Ø 25 mm | 300 | Bolt: M 12 - L = 45 mm |
| MT-3952/1 | Ø 25 mm | 350 | Bolt: M 16 - L = 45 mm |
| MT-3950/35* | Ø 25 mm | 300 | Bolt: M 16 - L = 35 mm |

* = not IEC

Insulating sticks for substation use

Telescopic sticks for voltage detectors and earthing systems for use in dry and wet conditions

Telescopic stick contains 2 elements made of resin polyester/glass fiber foam filled tube, which slide together and are equipped with a push button lock. **IEC-61235** ⚠

| Reference | Rated insulation (kV) | Ø (mm) | Overall length (m) | | Weight (kg) |
|-----------------|-----------------------|--------|--------------------|----------|-------------|
| | | | folded | extended | |
| CE-4-21* | 90 | 41/32 | 1.15 | 2.00 | 1.50 |

* Add end-piece C, K or E

Fixed length stick for use in dry and wet conditions

Manufactured from 36 mm dia. elements, with single 100 dia. skirts, light and rigid, shock resistant. **IEC-61235** ⚠

| Reference | Rated insulation (kV) | Ø (mm) | Overall length (m) | Weight (kg) |
|-----------------|-----------------------|--------|--------------------|-------------|
| CF-5-40* | 40 | 36 | 1.50 | 1.15 |

* Add end-piece C, K or E

Standard stick for use in dry conditions

| Reference | Rated insulation (kV) | Ø (mm) | Overall length (m) | Weight (kg) |
|-----------------|-----------------------|--------|--------------------|-------------|
| CF-3-72* | 72.5 | 36 | 1.50 | 0.88 |

* Add end-piece C, K or E

Short length clamp stick

IEC-61235 ⚠

| Reference | Ø (mm) | Overall length (m) | Weight (kg) |
|-------------------|--------|--------------------|-------------|
| MG-115/1-S | 32 | 1.50 | 2.40 |

Wall mounted supports

For sticks and voltage detectors. Plastic. Delivered with wood screws.

| Reference | Top | Bottom |
|----------------|------------|--------------|
| CI-06-D | Ø 28-30 mm | Ø 36 mm max. |
| CI-10-D | Ø 28-36 mm | Ø 58 mm max. |
| CI-12-D | Ø 28-30 mm | Ø 58 mm max. |



CE-4-21-C



CF-5



CF-3



MG-115/1-S



Top



Bottom

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Earthing and short-circuiting systems for 250 A separable connectors

Rating = 12.5 kA/1s

Equipment consisting of:

3 terminals, each fitted with a "handarff device" for locking.


1 terminal connecting kit, with double-crimped connectors

• 3 copper cables, 70 mm² section, length ~ 0.70 m

• 1 copper cable, section 35 mm², length ~ 2 m

• 1 earthing clamp MT-840/1

3 padlocks AL-230-S.

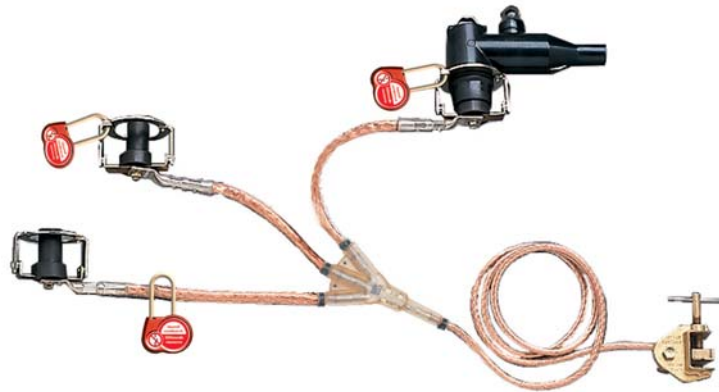

MT-8612

Delivered in metal box
620 x 195 x 150 mm - Weight: 7.6 kg

Earthing and short-circuiting systems for 400 A separable connectors

Rating = 12.5 kA/1s

Equipment consisting of:

3 terminals, each fitted with a bolted stirrup for locking.

1 terminal connecting kit, with double-crimped connectors

• 3 copper cables, 70 mm² section, length ~ 0.40 m

• 1 copper cable, section 35 mm², length ~ 2 m

• 1 earthing clamp MT-840/1

3 padlocks AL-230-S.



MT-8614

Delivered in metal box 480 x 340 x 195 mm
Weight: 13.5 kg

Voltage tester for M.V. separable connectors



CC-151-K

For details see page 76.

Voltage tester for M.V. separable connectors

Check the absence of voltage on the capacitive terminals of plug-in M.V. bushings.
 Sensor in the form of a bent finger enabling removal and reinstallation of the terminal insulating cover.
 Signal via beeping and bright red flashing of electro-luminescent diodes.
 Built-in function test via the "TEST" button which covers the entire device.
 Permanent stand-by state.
 Power supply: four 1.5 V, R-6 batteries.
 Mounting on insulating stick via a universal end.



CC-151-K

Tester in rigid case with batteries
 70 x 100 x 165 mm - 0.70 kg

CC-45-K

Special 45 kV insulating stick
 L = 1.25 m - 0.6 kg

Permanent luminous indicator

Permanently installed on bus bars, luminous indicator signals the presence of voltage at a glance.
 Single-pole 5 to 75 kV indicators.
 Signaling the presence of voltage by 7 electroluminescent diodes.
 For indoor use.




CL-40010

For round 5 to 20 mm Ø wires and 1 to 20 mm flat bars

*Electronic type detectors can also be used.
 Please refer pages 79/80/82.*

Voltage detector

For indoor use
 Built-in device for checking operation of the led's indicator via a piezo-electric generator.
 High-brightness led's indicator.
 Sturdy thermo-plastic moulded case providing.
 Pivoting contact electrode enabling wire contact at any angle.
 Telescopic insulating stick.

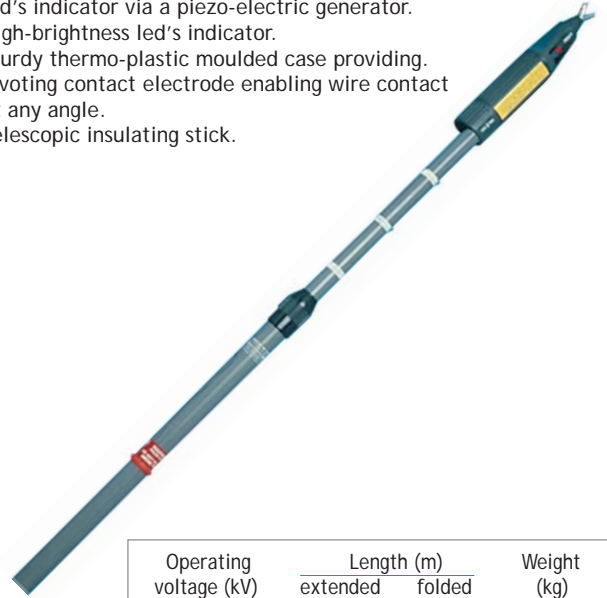

| Operating voltage (kV) | Length (m) | | Weight (kg) |
|------------------------|------------|--------|-------------|
| | extended | folded | |
| 5-40 | 1.26 | 0.85 | 0.95 |

CL-4-41/2

Delivered in a waterproof fabric case with strap - Weight: 0.95 kg

Voltage detector "compact serie"

For indoor use
 This compact serie voltage detector is designed to be carried easily by operators.
 Voltage presence is indicated by a high-brightness LED's indicator.
 Built-in device for checking of the LED's indicator by a piezotest generator.
 Equipped with a telescopic handle.

Delivered in holster.



| Reference | Operating voltage (kV) | Extended | Folded | Weight (kg) |
|---------------------|------------------------|----------|--------|-------------|
| CL-2-5/36-2 | 5-36 | 0.7 | 0.3 | 0.4 |
| CL-2-10/30-2 | 10-30 | 0.7 | 0.3 | 0.4 |

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

We can deliver complete set with foot capacitance, head capacitance and wirings to your own specifications. Please consult us.



Integrated voltage indicating system (V.P.I.S)



IEC 61958 

Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers. Voltage of use behind capacitive dividers: $V < 1000$ V. Light threshold: 90 V. Signalling: 3 neons. Attachment: male/female plugs.

CL-495-3

Packaging: vinyl cover
Dimensions: 130 x 30 mm

Integrated voltage detecting system (V.D.S)



IEC 61243-5 

Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers. Voltage of use behind capacitive dividers: 1000 V (between phase and earth). Light threshold: 70/90 V. Input impedance: 36 M Ω . Signalling by 3 red diodes.

CL-497-00

Packaging: vinyl cover
Dimensions: 146 x 30 mm

Interface for integrated voltage detecting system (V.D.S)



IEC 61243-5 

Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers. For High impedance detecting systems Input impedance: 36/43 M Ω . Voltage indication by 4 mm standard sockets on the front of the indicator.

CL-498-00

Packaging: vinyl cover
Dimensions: 146 x 30 mm



Sound phase comparator

IEC 61243-5 



The MX-404 sound phase comparator checks the concordance between 2 phases. The comparator's operation is indicated by: Emission of an audible signal when there is discrepancy between the two phases. Absence of an audible signal when there is no discrepancy between the two phases. Power supply: 9V type 6LR battery.

MX-404

Delivered in a storage box
Dimensions: 145 x 80 mm

Separable voltage detecting system (V.D.S)

IEC 61243-5 



CL-499/101

This device enables to check the absence or presence of voltage on three phases (L1, L2, L3). HR high impedance. Voltage max: 1080 V rms. 50/60 Hz. Voltage presence: red flashing LED > 1 Hz. Fits in CL-498 devices.

CL-499/101

Delivered in plastic bag

Life saving kits for M.V. substations

Wall mounted KIT

In case of an electrical accident, quick response is essential: seconds gained or lost can decide the life or death of a victim.

Our life saving equipment is designed to make all necessary materials immediately available to rescue personnel.

It includes:

- 1 rescue telescopic stick
- 1 voltage detector with flexible antenna contact (with autotest)
- 1 cable cutter with insulated handles
- Forged steel blades maximum opening: 30 mm
- 1 insulating platform, 24 kV high voltage
- Insulating gloves, insulating boots
- Safety instructions on the plastic board
- 1 talcum powder can.



Compact carrying KIT

This compact kit is designed especially to be carried in a vehicle for safety electrical intervention. Made in two part (of moulded material: PEHD), the case is also on its red part, an insulating platform.

Composition of the kit:

- 1 insulating platform
- 1 telescopic insulating stick
- 1 voltage detector with autotest
- 1 rescue hook
- 1 insulated cable cutter
- 1 pair of insulating gloves
- 1 pair of insulating boots
- 1 talcum powder can
- 1 safety instructions and safety first aid posters
- 1 adhesive tape (black and yellow).



| | |
|-----------------|---|
| CZ-54-R | Wall mounted panel 0.84 x 0.745 x 0.27 m 21 kg - With instructions in English - 24kV |
| CZ-54-MR | Same as CZ-54-R With instructions in English/Arabic - 24kV |
| CZ-55-R | Same as CZ-54-R except use tension: 36 kV |
| CZ-55-MR | Same as CZ-55-R With instructions in English/Arabic - 36kV |

| | |
|-------------------|---|
| CZ-53-R | 710 x 570 x 240 mm - Weight: 18.5 kg with instructions in English - 25kV |
| CZ-53-MR | Same as CZ-53-R with instructions in English/Arabic - 25kV |
| CZ-53-R/2 | Same as CZ-53-R except use tension: 36 kV |
| CZ-53-MR/2 | Same as CZ-53-R/2 With instructions in English/Arabic - 36kV |

Rescue stick

Insulating stick ended by a large hook in order to rescue quickly an electrified victim in case of accident.

| | |
|--------------|---|
| CS-45 | Length: 1.65 m - Rated insulation: 45 kV Delivered with wall mounted supports. |
|--------------|---|



IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators

IEC electronic Voltage Detectors, "Compact serie" for indoor and outdoor use

Ultimate technology of voltage detector "Head Capacitive Technology"

IEC-61243-1
 CE

Compact and light

It offers:

- a wide band (10/36 kV)
- a universal application (50/60 Hz)

Voltage presence is indicated by:

- red flashing LED (very bright -visible at more than 20 m in direct lighting)
- powerful rated audible signal > 60 dB(A)/2 m

Operating check:

By pressing the TEST button, correct operation is indicated as follows :

- a red LED flashes on
- sound signal

(during and after this test, the timed green LED lights up. While remaining on, it indicates the good working order of the detector)

Characteristics:

- Detectors have unitary adjustment and are checked by routine test
- Dielectrically tested on substation bars (bridging test)
- Precise and stable operating threshold
- Reduced sensitivity to induced voltages
- Reduced sensitivity to interference field
- High environmental resistance (impacts, vibrations, moisture)

Use from 50 to 60 Hz

Temperature conditions: class N (IEC-61243-1 standard)

Storage and operation: -25/ +55 °C

Robust housing

Power supply: 1 x 9V alkaline battery type 6LR61

Contact electrodes fitted to the housing by screwing and are easily interchangeable

End fittings:

C = hexagonal 12 mm, for hexagonal end-fitting sticks

K = universal, for universal end-fitting sticks

Weight of the detector: 420 g

Size of the detector: Ø 59 x 270 mm

Packaging: unit supplied complete in a case with batteries and contact electrodes

Total weight: 1100 g

Total size: 340 x 275 x 83 mm

Recommended stick:

CE-4-21. See page 81.



| Frequency 50/60 Hz | |
|----------------------|------------------------|
| Reference | Operating voltage (KV) |
| CC-875-10/36* | 10-36 |
| CC-875-11/33* | 11-33 |

* Specify type of mounting when ordering: C or K.

Medium voltage

For other voltages, please consult us.

Standard electronic voltage detector for indoor and outdoor use

With a precise and absolutely stable operating threshold, the DETEX ELECTRONIC DETECTORS offer users maximum safety on MV lines and installations.

Double signalling

- Voltage presence is indicated by both:
- extremely bright red flashing LED's (visible at more than 50 meters even in unfavourable light),
 - powerful rated audible signal > 60 dB/2 m.

Checking

By pressing the test button, the operator checks that the detector is working properly. When the test button is released, a timed green LED lights, indicating both the detector is operational and the self testing of the unit continues.

Continuous monitoring conditions

High reliability

- Tropicalized: -25 / +55 °C.
- housing made from polycarbonate with high mechanical properties and dielectric strength.

Removable electrode

Power supply

- four 1.5 V batteries type LR 6.

End fittings:

- "C" for hexagonal sticks.
- "K" for universal sticks.

Weight

500 g with batteries.

Packaging

Units supplied complete in a case with batteries and two contact electrodes (straight and V-shaped) - 390 x 90 x 90 mm
Weight: 0.800 kg.

Recommended sticks:

CE-4-21. See page 81.





CC-363-C

CC-363-K

| Reference | Operating voltage (Ph/ph - kV) |
|----------------|--------------------------------|
| CC-363* | 5-36 |

* Specify type of mounting when ordering: C or K.

| | |
|-------------------|--|
| CC-365-101 | Flag/Vee contact electrode |
| C-92-492 | Contact electrode for installations L = 310 mm, insulated on 300 mm |

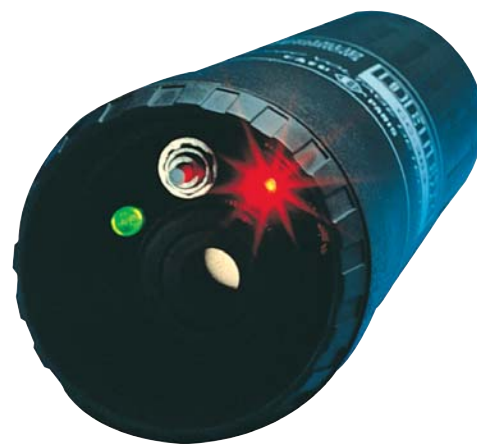

For other voltages, please consult us.


IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators


Telescopic sticks for voltage detectors

Telescopic stick contains 2 elements made of resin polyester/glass fiber foam filled tube, which slide together and are equipped with a push button lock. **IEC-61235** 

| Reference | Rated insulation (kV) | Ø tube (mm) | Overall length (m) | | Weight (kg) |
|-----------------|-----------------------|-------------|--------------------|----------|-------------|
| | | | folded | extended | |
| CE-4-21* | 90 | 41/32 | 1.15 | 2.00 | 1.50 |

* Specify type of mounting when ordering: C or K.


Telescopic sticks for voltage detectors

Contains 2 elements: ****IEC-60855** 
 A yellow lower element made of resin polyester/glass fiber foam filled 41 mm diameter base tube.
 An upper orange element made of glass fiber/resin epoxy foam filled of 32 mm diameter (**).

| Reference | Rated insulation (kV) | Ø tube (mm) | Overall length (m) | | Weight (kg) |
|---------------|-----------------------|-------------|--------------------|----------|-------------|
| | | | folded | extended | |
| CE-75* | 75 | 41/32** | 1.15 | 2.00 | 1.20 |

* Specify type of mounting when ordering: C or K.

Extension for insulating sticks

Extension with a male end-piece. **IEC-61235** 

| Reference | Length (m) | Weight (Kg) |
|------------------|------------|-------------|
| CM-7-10-A | 1.00 | 1.10 |



Medium voltage

Connection adaptors see page 91.

Unlike single-pole voltage detectors, two-pole testers may detect differences in voltage between any two points of an installation. Essentially used for phase balance operations, they may also be used for two-pole detection operations and H.V. fuse checking.

Two-pole Phase comparators for indoor use

The DETEX CL-8-36 detect differences in voltage between any two points of an installation indicated by LED's. It also enables assessment of the order of magnitude of the residual voltage induced by nearby live lines or circuits, and thus differentiates it from the one provided directly from a high voltage source.

Wide range of voltages: 2 to 36 kV.

High luminosity.

Compact: 0.62 m with probes dismantled.

High dielectric quality insulating material.

Two 1.25 m elements with removable probes, connected via a high-insulation lead.

Max. use distance: 2.25 m (with probe extenders).

Operation testing: with a checking device.



CL-8-36

CL-8-36 tester in plastic case
150 x 195 x 650 mm - Weight: 7.5 kg

CL-8-36/1

CL-8-36 tester with two probe extenders
0.550 m - cable, length: 2.87 m delivered
in plastic case 150 x 195 x 650 mm
Weight: 7.8 kg


ACCESSORIES

C-92-20

Spare 0.550 m probe

CL-8-05

Probe extenders 0.550 m

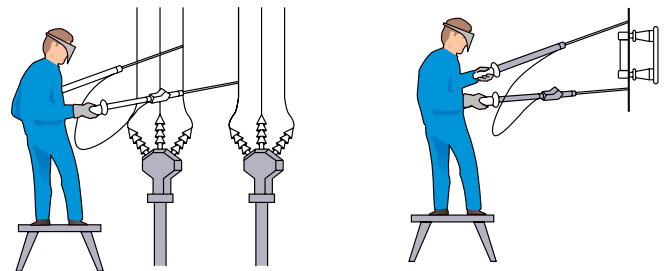

Checking for phase matching

Checking a H.V. fuse

PIEZOTEST™ Separate testing device for phase comparator

Piezo-electric generator activated via a handle mechanism providing a high frequency voltage. Metal contact at the tip of the device. This contact may receive the "banana" plug of the extension lead to facilitate testing on very long detectors. Earth socket at the base of the unit receiving a plug for making closed-circuit tests.



CL-1-05

In case, with lead - 190 x 32 x 65 mm
Weight: 0.300 kg

IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators

Single pole phase comparator for indoor and outdoor use

Frequency and voltage phase memory.
 Integrated TEST push-button.
 Orange LED = indication that frequency and voltage are in memory.
 Green LED = phasing indication.
 Red LED = non-phasing indication.
 Powered by a 6 LR 61 9 V battery.
 Delivered in carrying case.

IEC-61481



| Reference | Voltage (kV) | Length of antenna (m) |
|----------------------|--------------|-----------------------|
| CL-7-06/18* | 6-18 | 0.85 |
| CL-7-10/30* | 10-30 | 0.85 |
| CL-7-10/30-1* | 10-30 | 1.15 |
| CL-7-12/36* | 12-36 | 1.20 |


* Please specify type C or K when ordering.

For other voltages, please consult us.

Two-pole phase comparator for indoor and outdoor use

Precise indications provided by the galvanometer needle;
 dials are calibrated according to voltage.
 Assessment of the voltage value on testers/measurers.
 Complete function testing:
 - built-in, with TEST push-button (battery supplied).
 Consists of two elements connected by a high-insulation lead.
 Removable handles.
 Device delivered in metal case.
 140 x 250 x 850 mm - 7.5 kg.

CL-5-33-GB

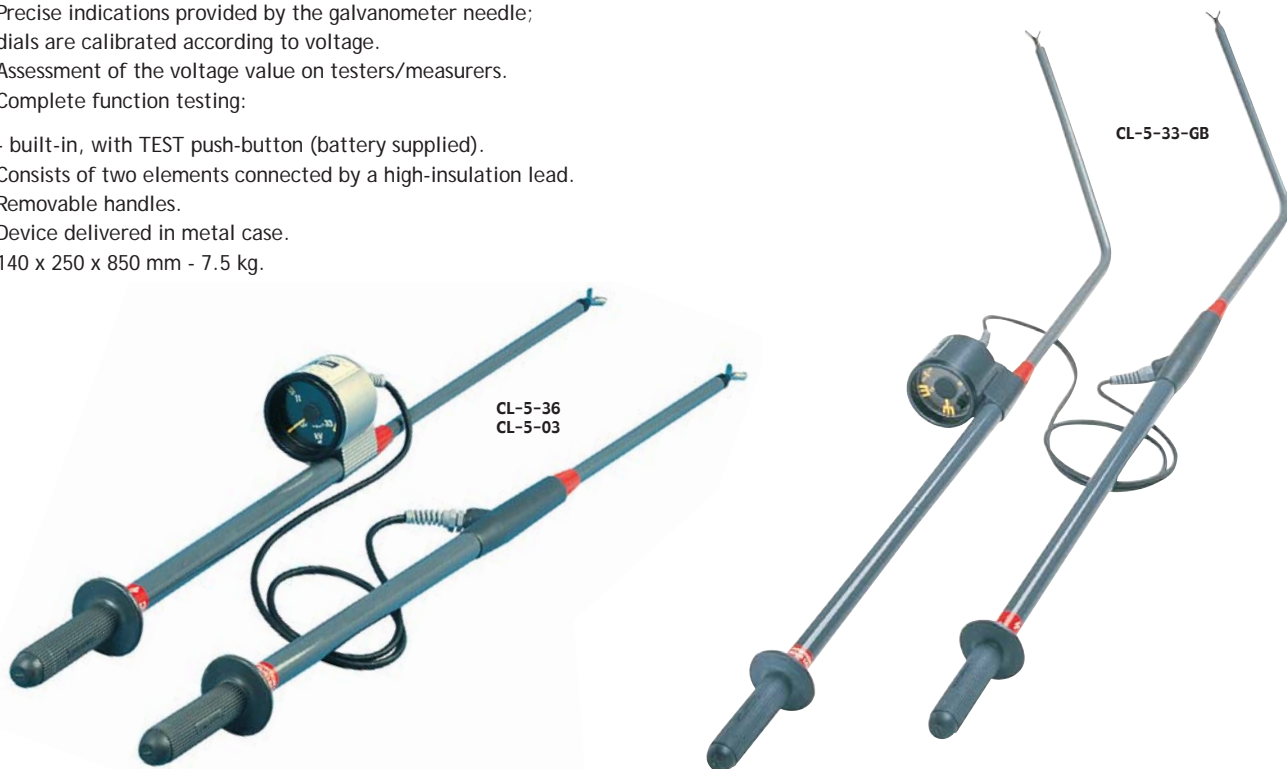

| Reference | Voltage (kV) | Dial scale (kV) | Observations |
|-------------------|--------------|-----------------------------|------------------------------|
| Phase tester | | | |
| CL-5-33-GB | 11-33 | 11-33 A.C/D.C | straight and angled antennae |
| CL-5-36 | 5-36 | 5-10-15-20-25-30-36 A.C/D.C | straight antennae |
| Tester-measurer | | | |
| CL-5-03 | 0.75-3 | 0.75-1-1.25-1.5-3 A.C/D.C | straight antennae |

Copper and aluminium cables

Copper cables

Extra flexible braided multi-strand cables.

- A** Transparent PVC sheath, with cable section identification.

- B** IEC-61230 Δ
Transparent silicon sheath according to IEC-61230. Resistant to temperature variations (-40 °C to +70 °C) with double IEC triangle marked on cable section.



| A | B IEC-61230 Δ | Rating (kA/1s) | Cable | | Section (mm ²) |
|----------|-------------------------|-------------------|------------------|-----------------------|-------------------------------|
| | | | Weight (kg/m) | \varnothing (mm) | |
| M-24-10 | | 2 | 0.105 | 4.5 | 10 |
| M-24-16 | M-24-16-S | 3.5 | 0.156 | 5.6 | 16 |
| M-24-25 | M-24-25-S | 6 | 0.275 | 7.5 | 25 |
| M-24-30 | | 7 | 0.330 | 8 | 30 |
| M-24-35 | M-24-35-S | 8 | 0.386 | 9 | 35 |
| M-24-40 | | 10 | 0.440 | 9.5 | 40 |
| M-24-50 | M-24-50-S | 12 | 0.545 | 10 | 50 |
| M-24-70 | M-24-70-S | 16 | 0.768 | 12 | 70 |
| M-24-75 | | 20 | 0.800 | 12 | 75 |
| M-24-95 | M-24-95-S | 20 | 1.000 | 14 | 95 |
| M-24-120 | M-24-120-S | 30 | 1.280 | 17 | 120 |
| M-24-150 | M-24-150-S | 40 | 1.630 | 19 | 150 |

Aluminium cables

Extra flexible braided multi-strand cables.

Transparent PVC sheath, with cable section identification.




| Reference | Rating (kA/1s) | Cable | | Section (mm ²) |
|-----------|-------------------|------------------|-----------------------|-------------------------------|
| | | Weight (kg/m) | \varnothing (mm) | |
| M-28-50 | 7.0 | 0.170 | 11.5 | 50 |
| M-28-70 | 10.0 | 0.240 | 13.4 | 70 |
| M-28-120 | 17.5 | 0.430 | 19.00 | 120 |
| M-28-150 | 20.0 | 0.510 | 21.00 | 150 |

Jumper cables realisation specially manufactured items




Quotations in accordance with faisability.
For all details:
Tel.: 33 142314624 / www.catuelec.com

Copper cables only:
Heating curves (Gut & Grundberg method)

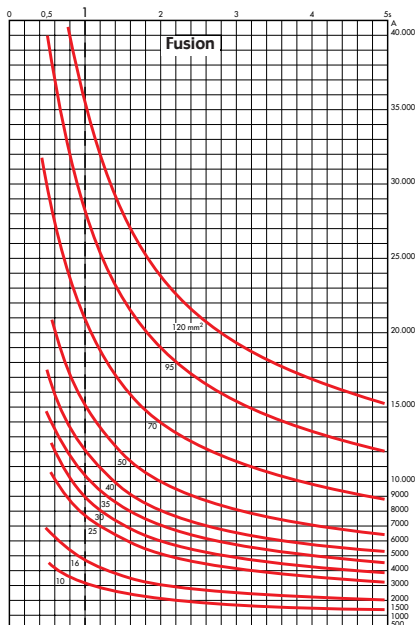

Copper cables only:
Heating curves - 300 °C

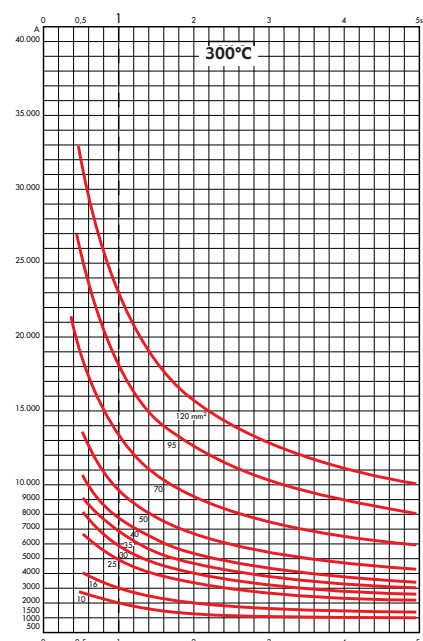

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

IEC-61230

In the context of the IEC-61230 international standard, CATU offers and answers to your needs with a large range of short-circuiting and earthing systems for substations and lines. These equipments are fitted with silicone-sheathed cables and double-crimped lugs at both ends: crimped once to the cable itself and once to the cable envelope.

This type of connection has been mechanically tested by simultaneous traction and twisting, followed by a proofing test in a soda bath. Before the short-circuiting tests, all components of this equipment are subjected to a cycle in a saline mist, to provide artificial ageing.

IEC short-circuiting and earthing systems (three-phase crossarm networks)

MT-613 clamps are automatic contact clamps. They are put into position from above the conductor, using the clamp dispenser head MT-635/1-C, which gives remarkable rapidity and ease of handling. Removal is carried out by pulling down the clamp, which revolves around the conductor by means of the pig tail fixed in the centre of the clamps dispenser head.

| Characteristics | MT-6613 | MT-6613/1 |
|---|-------------------|---|
| Rating | 8 kA/1s | 25 kA/0.5s 17.5 kA/1s |
| Connection copper cable between clamps (mm ²) | 35 | 95 |
| Earth connection copper cable (mm ²) | 16 | 35 |
| For conductors Ø (mm) | 5 to 30 | 5 to 30 |
| Recommended sticks** | CE-4-21-C (P. 74) | CF-5 serie (P. 88) CM-4400 serie (P. 88) |

Earth rod - 1 m:

MT-650/MT-652/10 or MT-652/15 to be ordered separately.

** To be ordered separately.

IEC-61230 



| Reference | Rating | Equipment composition |
|------------------|--------------------------|---|
| MT-6613 | 8 kA/1s | <ul style="list-style-type: none"> - 3 automatic contact clamps MT-613 - Connection cables 35 mm², max. gap between clamps: 2.75 m - 1 clamp dispenser head MT-635/1-C - 1 spool with earthing cable connection MT-640-S - 1 carrying bag M-87295 |
| MT-6613/1 | 25 kA/0.5s 17.5 kA/1s | <ul style="list-style-type: none"> - 3 automatic contact clamps MT-613 - Connection cables 95 mm², max. gap between clamps: 2.75 m - 1 clamp dispenser head MT-635/1-C - 1 earthing cable connection 15 x 35 mm² - 1 earthing clamp MT-840/1 - 1 carrying bag M-87295 |

For earthing systems to your own specification please see page 119.

Short-circuiting automatic contact clamps

Aluminium alloy.

| Reference | Rating | For conductors Ø (mm) |
|-----------------|--------------------------|-----------------------|
| MT-613 | 25 kA/0.5s or 17.5 kA/1s | 5 to 30 |
| MT-613/1 | 10 kA/1s | 5 to 30 |
| MT-613/2 | 8 kA/1s | 5 to 30 |




MT-613



MT-613/1
MT-613/2

Clamp dispenser heads

Copper aluminium alloy.

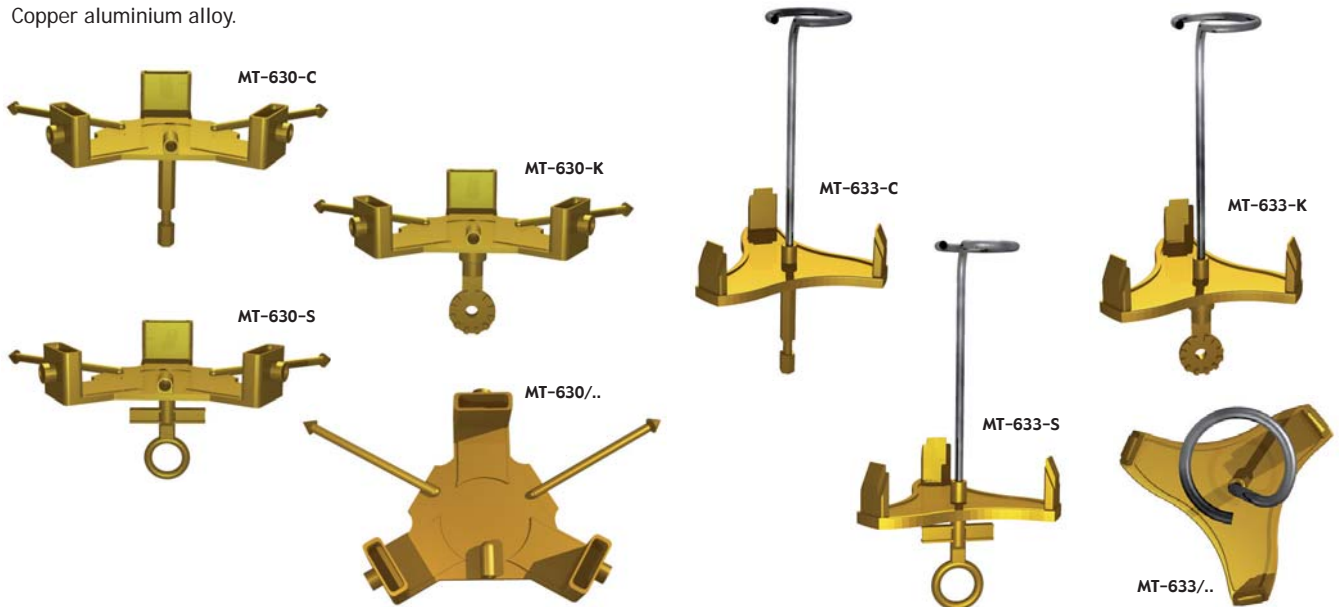

For MT-613 clamp

| Reference | Head for 3 clamps | Head for 4 clamps | With pigtail hook |
|-----------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| MT-630-C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| MT-630-K | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| MT-630-S | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| MT-635/1-C/K/S | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| MT-634-C/K | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

For MT-613/1 and 613/2 clamps

| Reference | Head for 3 clamps | Head for 4 clamps | With pigtail hook |
|---------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| MT-633-C | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| MT-633-K | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| MT-633-S | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| MT-634/1-C/K | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

Earth rod

| Reference | Characteristics | Length (m) |
|------------------|------------------------|------------|
| MT-652/10 | Screw ground rod. | 1 |
| MT-652/15 | Screw ground rod. | 1.50 |
| MT-650 | Hexagonal section rod. | 1 |



MT-652/10



MT-650

Earth clamp

Copper aluminium bronze earth clamps.



MT-840/1




MT-843

| Reference | Weight (kg) | Conductors (mm) |
|-----------------|-------------|--------------------|
| MT-840/1 | 0.48 | ● Ø 6-25 ■ 0-25 |
| MT-843 | 0.95 | ● Ø 6-35 ■ 0-35 |

Spool with earthing connection

Spool with cable and earth clamp.

IEC-61230



| Reference | Silicone cable (mm ²) | Length (m) |
|-----------------|-----------------------------------|------------|
| MT-640-S | 16 | 16 |
| MT-641-S | 16 | 25 |

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Short-circuiting and earthing systems (mid-span horizontal configurations, work from ground)

| Icc | Connecting cables | For conductors |
|---------|--------------------|----------------|
| 8 kA/1s | 35 mm ² | 3-22 mm Ø |

Installed from the ground on conductors up to 10.50 m.
Self locking contact clamp: powerful conductor clamping and very good performance at short-circuiting, does not slide.

PELICAN 2

- Easier installation features.
- More rigid metallic stick.
- Lower tube 30.6 mm dia.
- Upper tube 16 mm dia.
- Re-inforced insulated stick (36 mm dia.).
- Antisliding gripping area on the insulated stick: improves operator's grip.

Self locking clamp



Absence of spring increases reliability, facilitates cleaning and removal.

Used to check voltage absence beforehand



With a CC-375 IEC or CC-875 IEC series detector. Attached with a flag use contact electrode to one of the metallic stick.

Packaging



Equipment composition

| Reference | Icc (kA/1s) | Composition |
|------------------|-------------|---|
| MT-508/36 | 8 | 3 telescopic metallic sticks 3 elements MT-512/36 - L = 6.00/2.37 m - 2.4 kg 1 insulated stick MT-531 2 elements 1.65 m Reel for 3 cables 10 m x 35 mm ² with earth connect. for attachment to stick - MT-543/35 1 earth rod 1 m MT-650 1 bag M-87127 : 2.50 x 0.30 x 0.15 - 10.5 kg |
| MT-508/46 | 8 | 3 telescopic metallic sticks 4 elements MT-512/46 - L = 5.10/1.62 m - 2.1 kg 1 insulated stick MT-531 2 elements 1.65 m 1 insulated intermediate stick element 1.65 m CM-4-165-B Reel for 3 cables 10 m x 35 mm ² with earth connect. for attachment to stick - MT-543/35 1 stick lifter MT-546 1 earth rod 1 m MT-650 1 bag M-87-208 : 1.70 x 0.30 x 0.20 m - 11.3 kg with separate parts: - cable reel 0.42 x 0.42 x 0.14 m - 13.2 kg - rod - 2.2 kg |



Medium voltage

Insulating sticks for short-circuiting and earthing systems

IEC-60855



These 39 mm dia. elements are assembled using a new safety bayonet system connector in aluminium alloy. They allow construction of a large variety of custom made sticks that meet the most varied conditions of application. Calibrated lengths of 1 to 3 meters (with fraction of 0.50 m) permit a huge number of applications.

This range thus allows a stick-length limitation in case of space requirements and carrying capabilities. For common applications a serie of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.

| Reference | Complete stick length (m)* | Complete stick length (m)** | Insulating length (m) | Weight (kg) |
|---|----------------------------|-----------------------------|-----------------------|-------------|
| Basic elements | | | | |
| CM-4410 | 1.13 | | 0.7 | 1.25 |
| CM-4415 | 1.63 | | 1 | 1.70 |
| CM-4420 | 2.13 | | 1.2 | 2.70 |
| CM-4425 | 2.63 | | 1.5 | 3.20 |
| Intermediate elements | | | | |
| CM-4410-I | 1.165 | | 0.9 | 1.20 |
| CM-4415-I | 1.665 | | 1.4 | 1.60 |
| CM-4420-I | 2.165 | | 1.9 | 2.50 |
| CM-4425-I | 2.665 | | 2.4 | 3.00 |
| Terminal elements | | | | |
| CM-4410-* | 1.115 | 1.21 | 0.9-1 | 0.90 |
| CM-4415-* | 1.615 | 1.71 | 1.4-1.5 | 1.30 |
| CM-4420-* | 2.115 | 2.21 | 1.9-2 | 2.10 |
| CM-4425-* | 2.615 | 2.71 | 2.4-2.5 | 2.60 |
| Intermediate elements with rain skirts | | | | |
| CM-4400-J | 0.36 | | | 0.95 |

* Add end piece C, K, E.

* With the smallest end fitting.
 ** With the biggest end fitting.

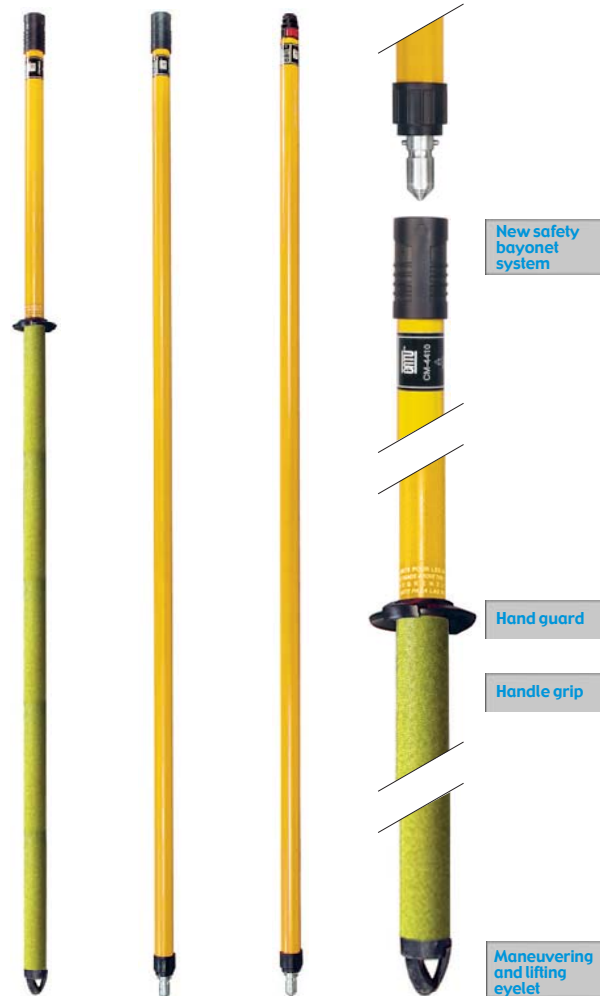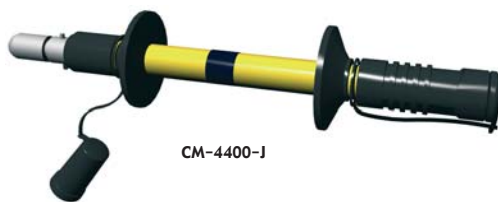

Sticks with rain skirts, C, K or E terminals

Epoxy reinforced fibre-glass insulating Ø 36 mm. **CEI-61235**
 Shock resisting polycarbonate rain skirts Ø 100 mm, height 90 mm.

| Reference | Length (m) | Rain skirt number | Weight (kg) |
|-----------------|------------|-------------------|-------------|
| CF-5-40* | 1.50 | 1 | 1.150 |
| CF-5-90* | 2.00 | 1 | 1.550 |

* Add end piece C, K, E.

Stick covers

Strong waterproof fabric, strap for carrying for CM-4 and CM-7.

| Reference | Elements length (m) | Overall dimensions (m) |
|----------------|---------------------|------------------------|
| CM-3-03 | 1.75 | 0.575 x 1.950 |
| CM-3-04 | 2.00 | 0.575 x 2.450 |
| CM-3-05 | 2.50 | 0.575 x 2.950 |
| CM-3-06 | 3.00 | 0.575 x 3.400 |



Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Clampsticks

For operations carried out on dead line networks.
Clamp stick for M.V. systems.
Cylindrical tubular rod Ø 32 mm in laminated epoxy glass fiber foam-filled.
Test voltage: 100 kV applied for 1 min, between alternate electrodes 30 cm away from one another.
Plastic control rod reinforced with glass fibre Ø 10 mm.
Rack-system operating handle, with 3 positions.
Suspension hook on the upper part.
Protective cap on the lower part.

Standard clampsticks

| Reference | Length (m) | Weight (Kg) |
|------------------|------------|-------------|
| MGS-100-S | 2 | 2.8 |
| MGS-103-S | 3.80 | 4.3 |



MGS-103-S

Telescopic measuring stick

8 telescopic sections of insulated polyester glass, graduated and operated by a push-button mechanism.
Upper portion made of high voltage "live working tool" quality orange epoxy glass.
Direct reading at the top of the 1st section of the stick.
Max. length: 12 m
Folded length: 1.50 m - 3.3 kg.




MO-832

Max. length: 12 m - For use on L.V., M.V., H.V. lines 220 kV max.

Telescopic and disconnect telescopic sticks

Sections made of reinforced high density electrical grade fiber glass.
Top sections insulated with fire retardant polyurethane foam core.
Tip section: triply reinforced to eliminate breakages.
Universal head adaptable to standard fit or accessories, K end-pieces.
Test: 100 kV/30 cm - 5 minutes.

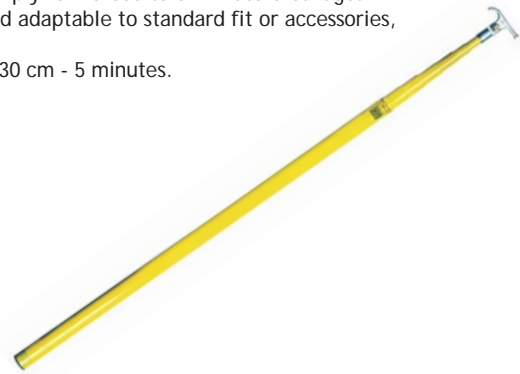

CE-5-50-(*) Max. length: 5 m - Weight: 2.50 kg

CE-5-60-(*) Max. length: 6 m - Weight: 3.00 kg

CE-5-70-(*) Max. length: 7 m - Weight: 3.50 kg

CE-5-90-(*) Max. length: 9 m - Weight: 4.00 kg

CE-5-105-(*) Max. length: 10.50 m - Weight: 5.50 kg

* add the end-piece reference C or K.

Measuring stick

Consisting of 2 elements of epoxy resin and glass fiber composite material, 0.80 m thick, with alternating red and white 10 cm sections.



MG-208-K

Weight: 0.520 kg

Stick bags

Strong waterproof fabric, strap for carrying.



| Reference | Max. stick length (m) |
|----------------|-----------------------|
| CM-1-10 | 1.20 |
| CM-1-15 | 1.63 |
| CM-1-20 | 2.20 |

Short-circuiting and earthing systems for underground cables

Cable testing stick

Enables piercing of cable insulation and shielding, earthing up to 50 kV.
 Double bezel cutting blade - Capacity: 70 mm dia.
 Cable-guide with protecting guide.
 0.60 m insulating sleeve with 0.80 m extender.
 Ratchet type operating handle.
 Woven copper earth wire 70 mm² x 2.50 m with earth clamp.

MP-211 Total length: 1.60 m - Weight: 8.75 kg



Insulating blanket

Must be placed over the piercing point. 0.90 x 0.90 m with 50 mm Ø hole in the centre for inserting the sleeve.

MP-212 Dimensions: 0.9 x 0.9 m



For Railways and Urban Transport applications
 please ask for our specific catalogue

 A red and grey high-speed train on tracks with overhead power lines.

Connection adaptors for insulating sticks

| | C | | K | | E | | S | | A or B | | | |
|---------------------|-----------|--------|-----------|--------|---------|--------|-------------|--------|---------------------------------|--------|--------|--------|
| | | | | | | | | | | | | |
| | hexagonal | | universal | | bayonet | | clamp-stick | | "MAJOR" Serie CM-4/CM-6/CM-7 | | | |
| Accessories | | | | | | | | | | | | |
| | C | | | | K | | | | E | | | |
| Connection adaptors | | | | | | | | | | | | |
| | CI-7-C | CI-3-C | CI-6-C | CI-5-C | CI-3-K | CI-4-K | CI-6-K | CI-7-K | CI-5-K | CI-3-E | CI-7-E | CI-4-E |
| Sticks | | | | | | | | | | | | |
| | E | AB | K | S | AB | C | K | E | S | AB | K | C |

With this range any accessory can be attached to any stick by using connection adaptors. Other models, please consult us.

Medium voltage

Sticks accessories

Tensioning equipment

Handling and uncoiling blocks

Manoeuvring hook



CM-02-C



CM-02-K

CM-02*

Bronze-copper nickel aluminium
Weight: 0.120 kg

* Add end-piece C, E or K.

Conductor brushes

Pivoting - 95 x 90 x 64 mm - Weight: 0.090 kg.



MG-206-AK

Moulded red colour body with card.
Reserved for aluminium conductors.

MG-206-CK

Moulded red colour body with card.
Reserved for copper conductors.

Pivoting - 110 x 110 x 70 mm - Weight: 0.250 kg.



MG-354



MG-352

MG-352-K

Moulded orange colour body with card.
Reserved for aluminium conductors.

MG-352-VK

Moulded green colour body with card.
Reserved for copper conductors.

MG-353-R

Orange spare brush for MG-353-V.
For hand brushing use.

MG-353-V

Green spare brush for MG-353-V.
For hand brushing use.

MG-354-K

Round brush - Ø 58 x 100 mm
Weight: 0.250 kg

MG-355

Spare brush for MG-354-K.

Diameter gauge

For conductors 3 to 16 mm Ø.
Entirely insulated material 270 x 35 x 12 mm.
Delivered in bag.



MD-535-K

Weight: 0.090 kg

Pig tail hook

Bronze end piece.
Spiral rod of corrosion-proof steel.



MG-207-K

K end-pieces steel - 120 x 65 x 60 mm
Weight: 0.210 kg

MG-207-S

S end-pieces steel - 250 x 65 x 60 mm
Weight: 0.280 kg

Cleaning brushes



MD-12-C



MD-10-C



MD-14-C

MD-10-C

Concave brush with two rows of
perpendicular bristles
100 x 125 x 170 mm - 0.500 kg

MD-12-C

Round head brush Ø 175 x 228 mm
0.500 kg

MD-14-C

Adjustable hinged round head brush
Ø 175 x 328 mm - 0.500 kg

Trimmer and pruning saw



MD-40-B



MD-42-B

MD-40-*

Trimmer, maximum capacity Ø 45 mm
(for branches up to 28 mm depending on
tree species) - 375 x 240 x 60 mm - 1.200 kg

MD-42-B

Pruning saw on rigid frame, 34 cm blade
125 x 610 x 60 mm - 1.100 kg

M-92-28

Replacement blade

* Add end-piece B or K.

Fuse puller

All parts in metal protected against
corrosion. Jaws sheathed with plastic.
Capacity : up to Ø 70 mm.



CM-04-K

Overall dimensions: 230 mm x 80 mm

Sticks accessories

Tensioning equipment

Handling and uncoiling blocks

Automatic come-along clamp

For non-insulated conductors: alloy, ACSR, alu, steel.

Characteristics

Steel body - mild bronze jaws.

Field on use

Overhead network.

Working method

Distance method.

Function use

The AUTOMATIC COME-ALONG CLAMPS are used to produce an anchoring on a line conductor in view of:

- moving it lengthwise
- locking it in position
- alternating its mechanical tension.



| Reference | Ø (mm) | | Max. working load (daN) | Jaws length (mm) | Max. length (mm) | Weight (kg) |
|------------------|--------|-------|-------------------------|------------------|------------------|-------------|
| | mini | max. | | | | |
| MO-339/02 | 5.54 | 13.97 | 3636 | 127 | 400 | 2.84 |
| MO-339/03 | 13.46 | 18.8 | 3636 | 140 | 450 | 3.52 |

Automatic come-along

For alu, alu alloy or ACSR.

| Reference | Ø cable (mm) | Working load (daN) | Weight (kg) |
|--------------------|--------------|--------------------|-------------|
| MO-332/09-D | 2.6-9.4 | 800 | 1.000 |
| MO-332/14-D | 6.4-14.3 | 1500 | 1.300 |
| MO-332/13-E | 5-13.2 | 2500 | 2.600 |
| MO-332/18-E | 12.7-18.8 | 3500 | 4.000 |
| MO-332/22-E | 17-22.5 | 3500 | 4.000 |



Insulated cables.

| Reference | Ø cable (mm) | Working load (daN) | Weight (kg) |
|--------------------|--------------|--------------------|-------------|
| MO-331/13-P | 6-13.5 | 600 | 1.000 |
| MO-331/22-P | 17-22 | 400 | 1.000 |
| MO-331/38-P | 33-38 | 800 | 3.775 |



Come-along

Not suitable for alu conductors.



| Reference | Clamping capacity Ø (mm) | Weight (kg) |
|------------------|--------------------------|-------------|
| MO-337/06 | 1-8 | 0.300 |

Adjustment "Come-along"

Tightening by cam jaw.

For copper and aluminium conductors.



| Reference | Clamping capacity Ø (mm) | Weight (kg) |
|--------------|--------------------------|-------------|
| MK-08 | 2-18 | 0.300 |
| MK-15 | 7-15 | 0.550 |
| MK-20 | 14-18 | 0.600 |

“TIRFOR” and “JOCKEY” winches

System traction produced by jaws which reproduces movement of hands pulling on cord, thus making it possible to enter an unlimited cable length.



| Reference | Type | Maximum force (daN)** | Requirements (cm) | Weight without cable (kg) | Cable weight (kg) |
|------------------|------------|-----------------------|--------------------|---------------------------|-------------------|
| ML-05/10 | Jockey J-5 | 500 | 31 x 21.5 x 5.5 | 4 | 2.5 |
| ML-08/20* | T-508 | 800 | 42 x 25 x 9.9 | 6.6 | 7 |
| ML-16/20* | T-516 | 1 600 | 53 x 31.5 x 12.7 | 13.5 | 12.5 |
| ML-32/20* | T-532 | 3 200 | 63.1 x 35.7 x 14.8 | 24 | 26 |

*Equipment delivered with 20 m cable equipped with hook.

**The first number indicates the maximum authorized lifting load.

“TIRVIT” mechanical adjusters

The conductor to be adjusted is directly clamped between two cam jaws which alternately approach and move away from each other by lever manoeuvring. Very simple, sturdy and reliable, the Tirvit is the ideal apparatus for tightening up small and medium section lines. It is equipped with a chain and handle for fixed anchoring.



| Reference | Force (daN) | Clamping capacity Ø (mm) | Total - Length (m) - lever | | Weight (kg) |
|---------------|-------------|--------------------------|----------------------------|-------|-------------|
| MK-40 | 400 | 2-8 | 0.680 | 0.540 | 4.000 |
| MK-60 | 600 | 7-15 | 0.780 | 0.630 | 5.200 |
| MK-100 | 1 000 | 14-18 | 0.875 | 0.700 | 6.200 |

Parallel jaws “Come-along”

| Reference | Conductor size | | Safe load (daN) | Weight (kg) |
|--------------------|--|----------------------------|-----------------|-------------|
| | Ø (mm) | section (mm ²) | | |
| MO-331/06-A | 8.5 | 25-35 | 1 000 | 0.800 |
| MO-331/09-A | 12 | 50-70 | 1 700 | 1.100 |
| MO-331/12-A | 16 | 95-120 | 3 000 | 1.800 |
| MO-331/04-B | 1-4 | 1-16 | 500 | 0.270 |
| MO-331/08-B | 3-8 | 6-35 | 1 000 | 0.800 |
| MO-331/10-B | 5-10 | 16-70 | 1 700 | 1.100 |
| MO-331/16-B | 8-16 | 50-150 | 3 000 | 1.900 |
| MO-331/26-B | 8-26 | 90-400 | 4 000 | 3.700 |
| MO-331/13-P | For insulated cable. Capacity Ø 3.5 to 14 mm - 800 daN | | | |

For bare cables (material: forged steel).

References are followed by the index A or B to indicate:

A - Suitable for use with aluminium conductors

(including all aluminium alloys),

B - Suitable for use with copper or steel conductors.



Uncoiling block

For bare cables.
Made entirely from aluminium alloy.
Pivoting safety hook. Full wheel rigger.
Ring with greaser.
Safety catch.

For insulated cables.
Single piece body made of aluminium alloy. Nylon strap (length 1.5 m) firmly attached to the body equipped with automatic ratchet tightener.
Maximum load of use: F1: 800 daN, F2: 400 daN, F3: 120 daN.

| Reference | Utilisation | Groove bottom diameter (mm) | Capacity (mm) | Maximum load (daN) | Hook capacity (mm) | Weight (kg) |
|-------------------|---|-----------------------------|---------------|--------------------|--------------------|-------------|
| MO-375/150 | Bare cables | 160 | 22 | 1 000 | 25 | 1.55 |
| MO-375/250 | Bare cables | 250 | 38 | 1 000 | 25 | 2.1 |
| MO-375/300 | Bare cables | 300 | 36 | 1 500 | 25 | 2.85 |
| MO-375/400 | Bare cables | 400 | 80 | 2 000 | NC* | 15.0 |
| MO-375/600 | Bare cables | 600 | 80 | 3 000 | NC* | 24.5 |
| MO-375/800 | Bare cables | 800 | 100 | 5 000 | NC* | 35.5 |
| MO-371/01 | Insulated cables | 140 | 80 | 800 | 24 | 1.5 |
| MO-371/100 | Bracket with strap for MO-371/01 | | - | 800 | - | 2.2 |

* NC : not communicated.



MO-375/...

MO-371/100



MO-371/01

Opening block

For elevation handling, single block and tackle and return block.
Can also be used as uncoiling block.
Aluminium alloy - block assembled on needle bearings.
Block Ø at groove bottom: 114 mm.
Maximum rope Ø: 16 mm.
Permissible load on rope strands: 250 daN.
Hook opening: 33 mm.

MO-308 Weight: 3 kg

For other models, please consult us.



Ratchet lift-chain hoists


Precise: 1.3 to 0.3 mm travel.
Aluminium alloy body and lever.
360° short lever used without large effort.
Chain can enter from all angles.
Three position selector:
up - down - free chain.
Safety factor > 5.



| Reference | Maximum lifting load (kg) | Overall width (mm) | Weight (kg) | |
|------------------|---------------------------|--------------------|-------------|------------|
| | | | run 1.50 m | run 5.00 m |
| MO-431/07 | 750 | 84 | 7.00 | - |
| MO-435/07 | 750 | 84 | - | 10.35 |
| MO-431/15 | 1 500 | 108 | 11.00 | - |
| MO-435/15 | 1 500 | 108 | - | 15.80 |
| MO-431/30 | 3 000 | 115 | 20.00 | - |

Guying equipment

Used whenever pole stability is doubtful. Hinged jaw device installed, from the ground, at a 6 to 8 m height using connectable rods. Guy wires fixed on jaws and staked to the ground by rods ensure pole stability. Forged hot galvanised steel jaws, test load: 1 000 daN. Control rod 6 m in elements of 1.20 m, aluminium alloy. Set of ropes: 3 guy wires 11 or 15 m + a strap with centre ring - with heart shaped thimble and snaps. 3 steel anchoring rods, 1 m.

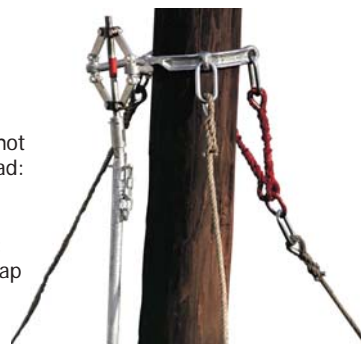

MP-315

Guying equipment with 15 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods with carrying belt - 26.5 kg

MP-311

Guying equipment with 11 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods - 22 kg

The rod is, in most cases, the most practical, effective and reliable earth connection means.

Highly effective: for a given contact surface area, the linear type electrode provides, both theoretically and practically, the least earth resistance. Furthermore, it enables the most moist and conductive layers to be reached.

Easy and quick to install, it requires no earth work. Even inside industrial buildings, it is often possible to install an earth rod exactly where required by breaking through a small area of the floor.

Accessible and testable connection: the use of an inspection box makes it possible to leave the head of the rod and its connection unburied and to periodically test it and measure its resistance.

Self connectable rods

The lower end of each rod is equipped with a point used both for driving into the earth and for connection; the upper pierced end receives (without the sleeve) the point of the previous rod. Use a rivetting head so as not to damage the upper end when driving in.

Connectable rods

Conical slide-in provides perfect assembly stability. For deep earth connections.

Copper/steel (350 µm coating) earth rods

| Reference | Type | Ø (mm) | Length (m) | Weight (kg) | Connection |
|------------------|------------------|--------------|------------|-------------|-----------------|
| TP-1610-R | standard (1) | 14.2 Unit 16 | 1.0 | 1.200 | |
| TP-1615-R | standard (1) | 14.2 Unit 16 | 1.5 | 1.800 | |
| TP-1620-R | standard (1) | 14.2 Unit 16 | 2.0 | 2.400 | |
| TP-1910-R | standard | 17.3 Unit 19 | 1.0 | 2.000 | |
| TP-1915-R | standard | 17.3 Unit 19 | 1.5 | 2.800 | |
| TP-1920-R | standard | 17.3 Unit 19 | 2.0 | 3.600 | |
| TR-116-10 | self connectable | 14.2 Unit 16 | 1.0 | 1.100 | TO-3-16/19 |
| TR-116-15 | self connectable | 14.2 Unit 16 | 1.5 | 2.000 | TO-2-16 TS-1601 |
| TR-119-10 | self connectable | 17.3 Unit 19 | 1.0 | 1.800 | TO-3-16/19 |
| TR-119-15 | self connectable | 17.3 Unit 19 | 1.5 | 2.750 | TO-2-19 TS-1901 |
| TR-119-20 | self connectable | 17.3 Unit 19 | 2.0 | 3.500 | |
| TR-1610 | connectable (2) | 14.2 Unit 16 | 1.0 | 1.250 | TO-3-16/19 |
| TR-1615 | connectable (2) | 14.2 Unit 16 | 1.5 | 1.900 | TO-2-16 TS-1601 |
| TR-1620 | connectable (2) | 14.2 Unit 16 | 2.0 | 2.500 | TS-1602 TS-1603 |
| TR-1910 | connectable (2) | 17.3 Unit 19 | 1.0 | 1.950 | TO-3-16/19 |
| TR-1915 | connectable (2) | 17.3 Unit 19 | 1.5 | 1.850 | TO-2-19 |
| TR-1920 | connectable (2) | 17.3 Unit 19 | 2.0 | 3.750 | TS-1901 |
| | | | | | TS-1902 TS-1903 |




- (1) Delivered completed with connection.
- (2) Sleeves and spikes have to be ordered separately.



Connectors

| Reference | Rod Ø max. (mm) | Conductors section max. (mm²) | Type |
|-------------------|-----------------|-------------------------------|------------------------|
| TO-2-16 | 16 | 40 | Copper |
| TO-2-19 | 19 | 40 | |
| TO-3-16/19 | 19 | 40 | Copper aluminium alloy |
| TS-1601 | 14 | 95 | Copper aluminium alloy |
| TS-1901 | 19 | 95 | |

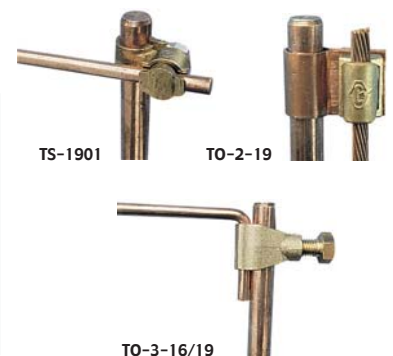

Earth rods

Connectors

Earthing clip

Earth tester

Earthing clip

Interconnects to earth every metallic part of installations.

| Reference | Conductors section (mm ²) | Crimping capacity on pipe (Ø mm) |
|-------------------|---------------------------------------|----------------------------------|
| COL-8/32 | 1 x 2.5 to 2 x 6 | 8-32 |
| COL-32/100 | 1 x 2.5 to 2 x 16 | 32-100 |



MX-430-M earth tester

The MX-430-M allows for the measurement of earth resistance and earth specific resistivity and also the spurious voltages caused by grounding parasitic voltage presence.

This equipment is suitable for fast and easy measurement of the grounding resistance in home, industrial buildings, substations,...

- Wide range of measurement from 0.01 Ω to 20 KΩ
- High visibility 3 1/2 digit display with direct readings, even under sunlight
- Supplied with a rechargeable internal battery. A smart charger is microprocessor-controlled and can be powered from the mains by a power plug provided source or from a 12 V car battery.

Technical features

- Application: measurement of grounding resistances (with 3 earth rods), earth resistivity (with 4 earth rods) and spurious voltage presence
- Range of measurement: 0 - 20 Ω; 0-200 Ω; 0-2000 Ω and 20 KΩ
- Voltmeter: voltmeter function in AC range as a conventional voltmeter 0-200 V AC
- Operation frequency: 1470 Hz
- Current in and out put power: less than 0,5 W and the out put current is limited to less than 15 mA (peak to peak)
- Operation temperature: -10°C / +50°C
- Storage temperature: -25°C / +65°C
- Humidity: 95% RH (without condemnation)
- Accessories included:
 - Connection wire to supply the charger with a 12 V battery
 - Battery charger 220-240 V
 - Storage bag



MX-430-M 221 x 189 x 99 mm - Weight: 2 kg

Accessories (measurement kit) MX-433-T

- 1 storage bag
- 4 earth rods copper plated steel
- 1 x 5 meters black cable
- 1 x 40 meters red cable
- 2 x 20 meters cable (1 blue and 1 green)
- 1 x 5 meters green cable to connect to the grounding system
- 1 hammer

MX-433-T 570 x 220 x 160 mm - Weight: 7.7 kg




LIVE WORKING TOOLS



Since the second world war, CATU has worked in close co-operation with EDF to research and develop safety equipment and practices for use on low and high voltage networks, initially in France and now worldwide.

Utilities would be better off efficiency of their networks by avoiding outages, whatever the costs. With the increasing recognition of EDF-Serect worldwide, CATU is fast becoming a major supplier in liveline working equipment. All the tools meet the specifications of the International Electrotechnical Committee (IEC).

CATU tools have a liveline life of around 20 years.

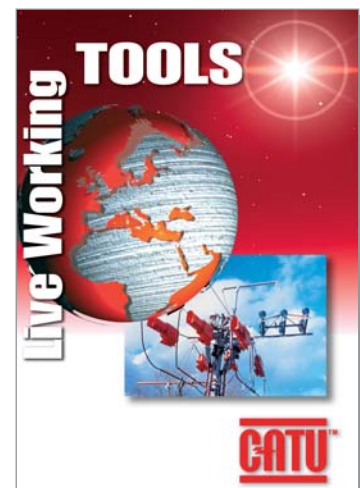


Catalogue available upon request.

High voltage



Above 52kV

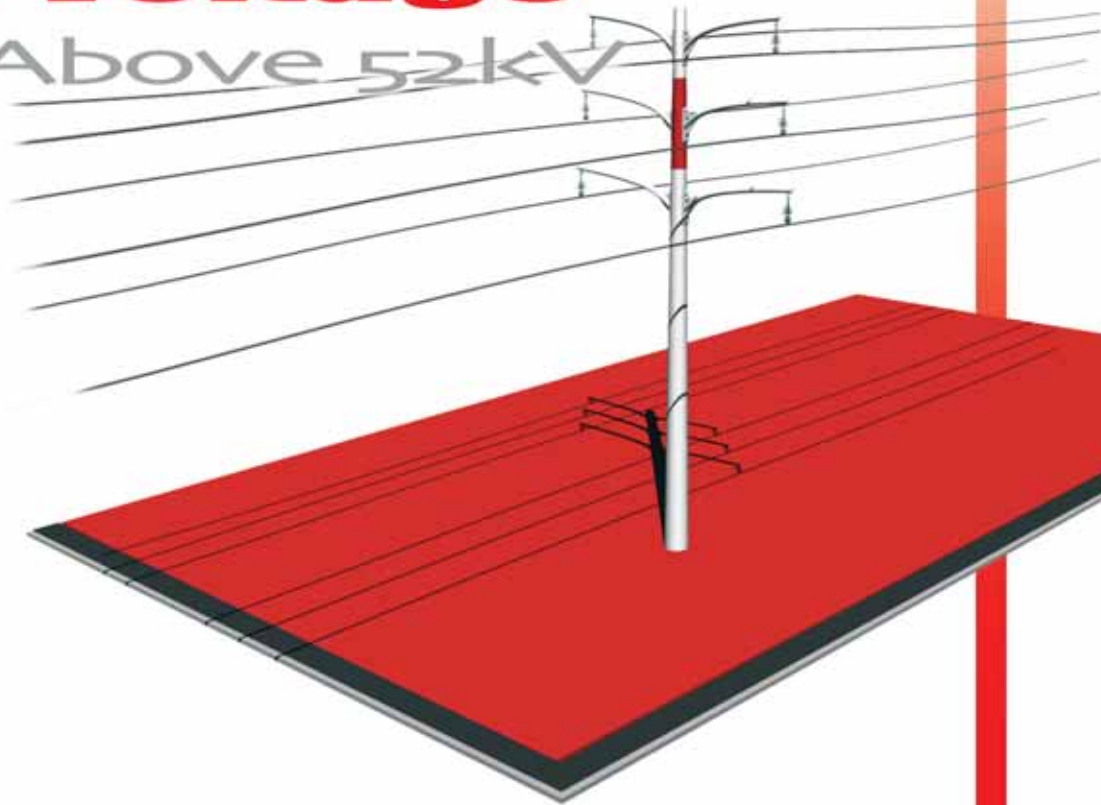

Equipment guide

100

Personal protective equipment

102

Safety padlocks and warning signs

110

Voltage detectors

113


Short-circuiting and earthing systems

115

High voltage

Examples of usual applications

Overhead line (work from pole)

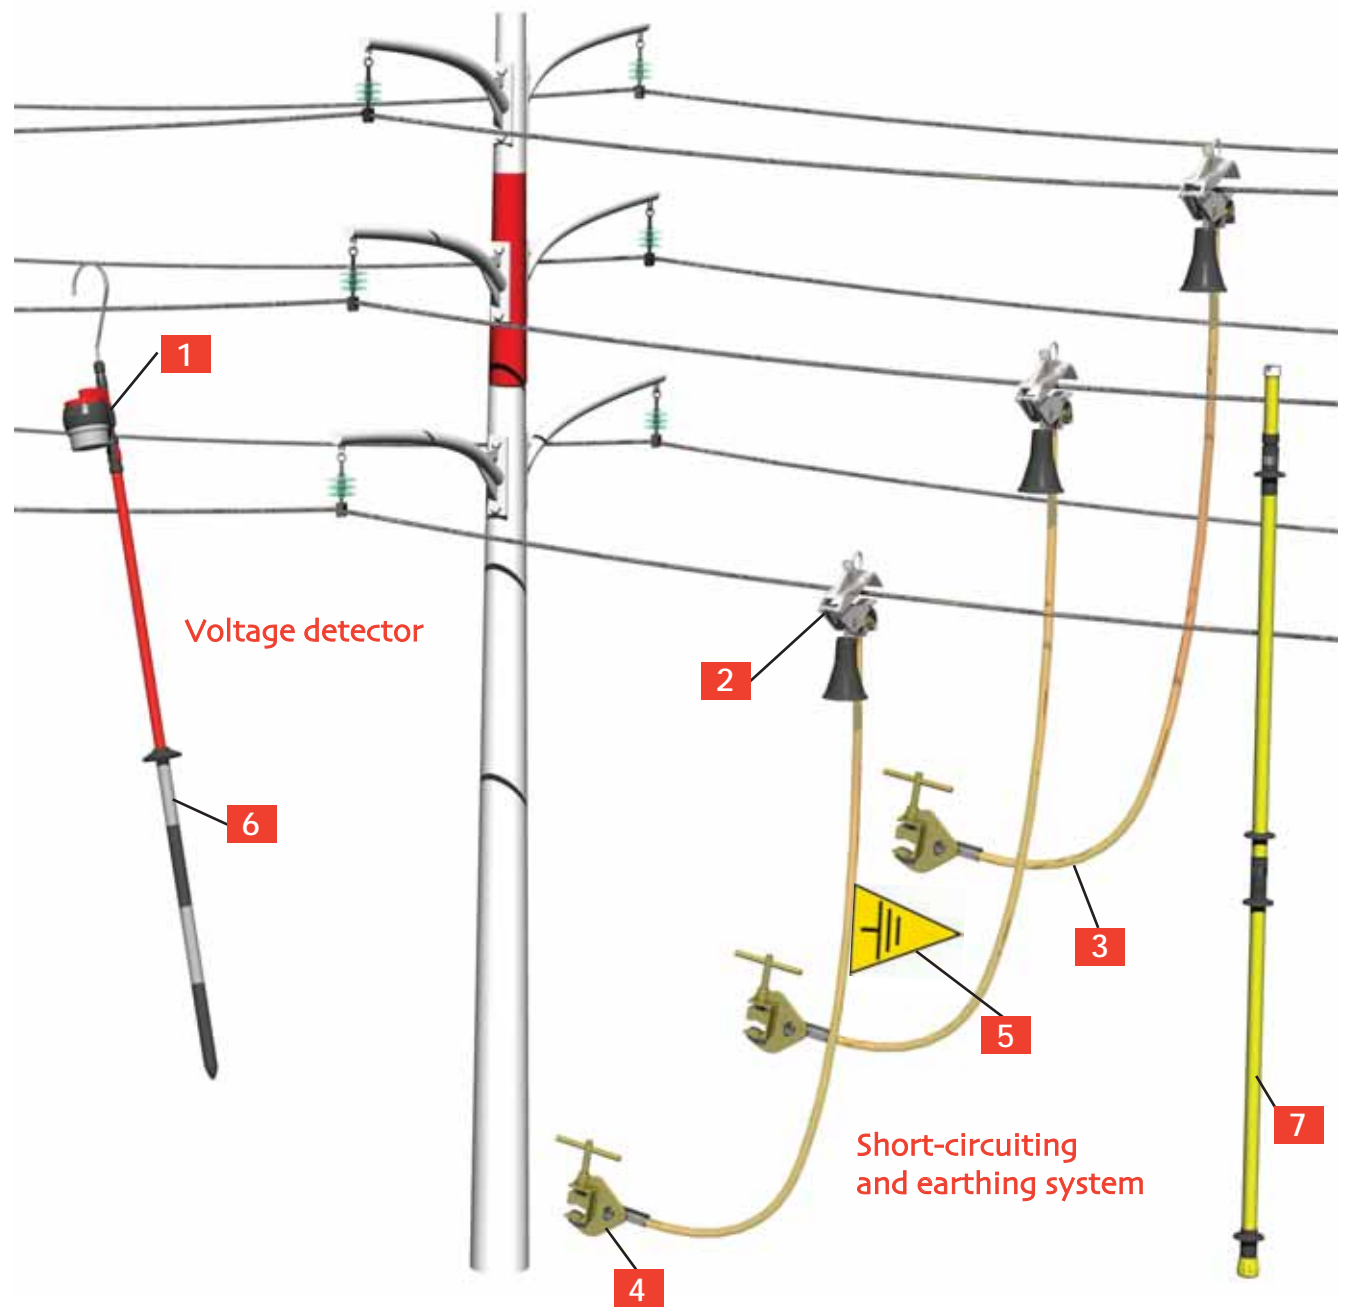

High voltage

Voltage detectors


| | | | |
|----------|--|--------------------------|-----------|
| 1 | Electronic voltage detectors IEC or standard | References: CC-245 serie | Page: 113 |
|----------|--|--------------------------|-----------|

Short-circuiting Systems

| | | | |
|----------|--|-----------------------------|-----------|
| 2 | Clamps manoeuvrable by insulating sticks | References: MT-730 serie | Page: 115 |
| 3 | Cables (copper) | References: M-24-... series | Page: 117 |

Before intervention select the right personal protective equipment

Substation line (work from ground)

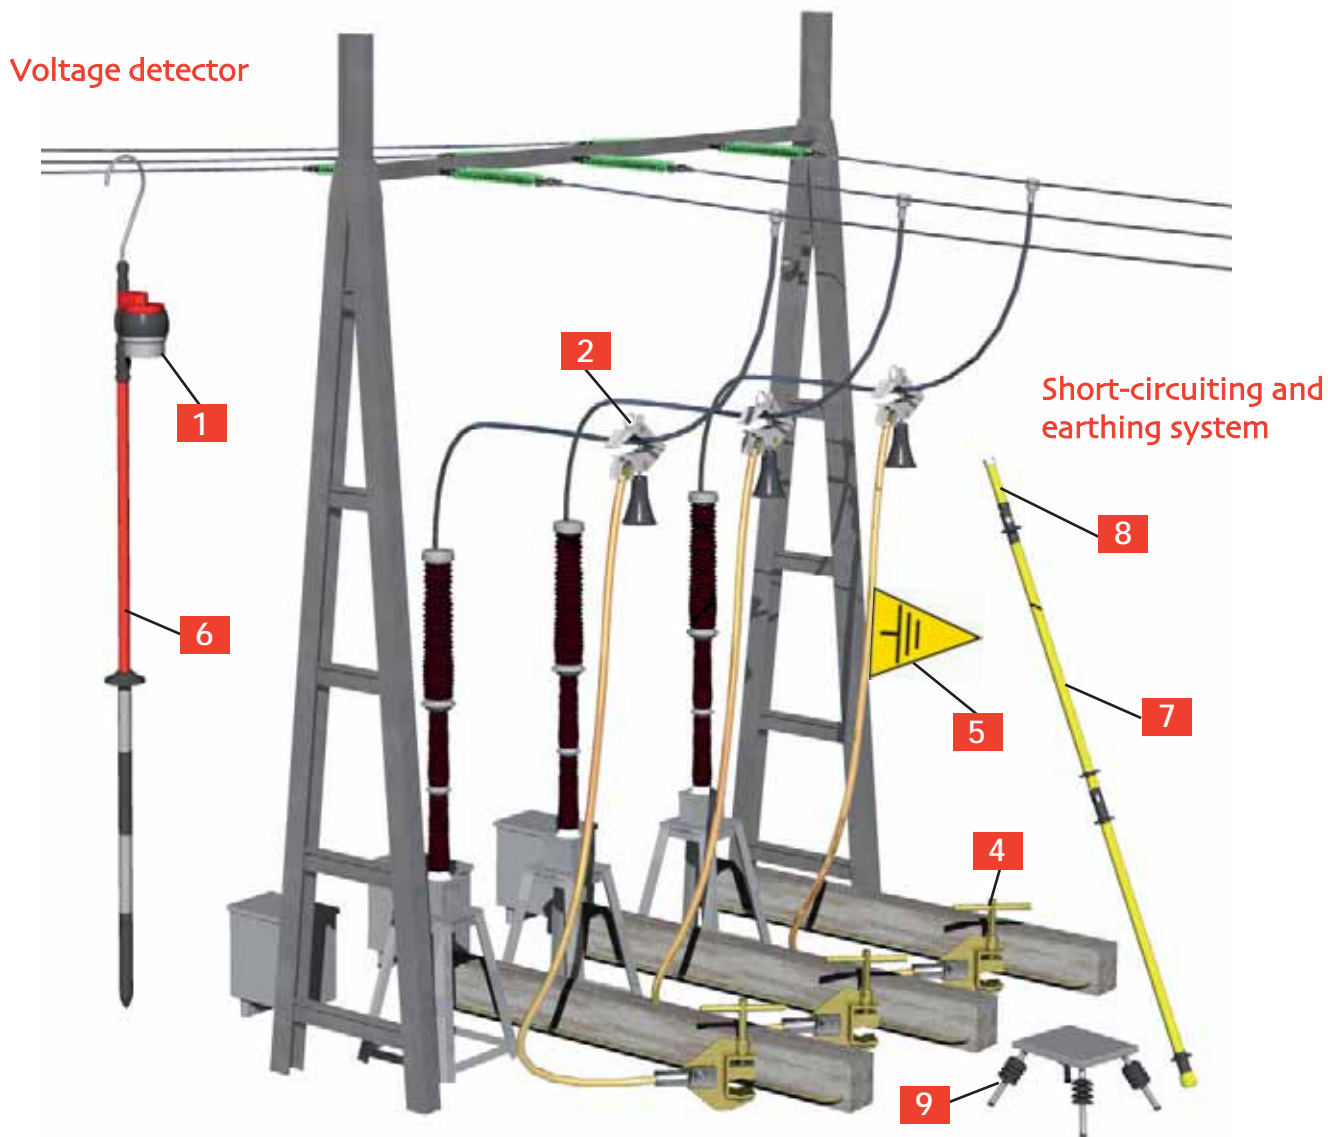

Earth Clamps and flags

| | | | |
|----------|--------------|----------------------------|-----------|
| 4 | Earth Clamps | References: MT-847, MT-843 | Page: 116 |
| 5 | Earth Flags | References: AL-58, AL-60 | Page: 112 |

insulating sticks

| | | | |
|----------|--|---------------------------|-----------|
| 6 | Insulating Sticks IEC For short-circuiting systems and Voltage detectors | References: CM-4000 serie | Page: 114 |
| 7 | Insulating sticks for short circuiting and earthing system | References: CM-6 serie | Page: 116 |
| 8 | Connection adaptors | References: CI... serie | Page: 115 |

insulating platform

| | | | |
|----------|---------------------------------|---------------------|-----------|
| 9 | Insulating platform outdoor use | References: CT-9-63 | Page: 105 |
|----------|---------------------------------|---------------------|-----------|

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-11000** Clear lenses, delivered in pouch
- MO-11001** Tinted lenses, delivered in pouch

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-11010** Clear lenses
- MO-11011** Green tinted lenses

ABS helmet

Electrically insulating helmets for use on low voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit - headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg.

EN 397
EN 50365 Δ
ANSI Z89.1:2003
Class E 20 kV
CE



- MO-182/1-B** White
- MO-182/1-R** Red

Face shield

Face shield adjustable on MO -182 helmet. 100% UV protection. Weight: 0.170 kg. Caution: Do not use for welding operations.

EN 166/EN 170
CE



- MO-184** Single size, adjustable by rubber band

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg.

EN 166/EN 170/EN 397
EN 50365 Δ
CE



- MO-185-BL** White
- MO-185-R** Red
- MO-185-J** Yellow
- MO-185-B** Blue
- M-881622** Spare face shield for MO-185

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0,465 Kg.

EN 397
CE



- MO-183-BL** White, single size, adjustable
- MO-183-RL** Red, single size, adjustable

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet.
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.



LED's Headlamp (3 LED's)

Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance LEDs.
- 3 lighting levels.
- Adjustable lamp height angle.
- Very light, waterproof IP65.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 80 hours.



MS-118 Headlamp - Weight: 0.187 kg

M-95-865 Halogen bulb (sold by set of 5 units)
5.2 V 0.5 A

M-95-864 Hooks set for helmet

MS-121 Delivered with batteries and a carrying bag
Weight: 0.09 Kg

M-95-864 Hooks set for helmet

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's).
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting.
IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.



MS-127 Delivered with batteries and a carrying bag
Weight: 226 g

M-95-864 Hooks set for helmet

Intrinsically safe ATEX LED's Headlamp

II 2GD EEx ia IIC T4
Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126 Delivered with batteries - Weight: 0,125Kg

M-95-864 Hooks set for helmet

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard. To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter. The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set. Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.



IEC-60903

| Reference | Class | Voltage (V) | Thickness (mm) | Designation | Weight (g) |
|---------------|-------|-------------|----------------|------------------------------|------------|
| CG-30 (*) | 3 | 26500 | 2.9 | latex | 560 |
| CG-30 (*)-AM | 3 | 26500 | 2.7 | Two colors latex rolled edge | 530 |
| CG-40 (**) | 4 | 36000 | 3.6 | latex | 800 |
| CG-40 (**)-AM | 4 | 36000 | 3 | Two colors latex rolled edge | 650 |

* References to be completed by size B or C. Correspondence with standard sizes: B = 9, C = 10, D = 11.
 ** References to be completed by size C or D.

Pneumatic glove tester

For compulsory control of gloves before use. Checking is done by inflating and immersing in water.



CG-117 140 x 150 x 160 mm - Weight: 0.600 kg

Undergloves

Cotton undergloves To be used with insulating rubber gloves.



CG-80 ()** ** H: men / F: women

Rubber gloves storage box with window

To be placed in high voltage stations. Insulating material, shock resistant, yellow colour. Transparent window (enables to check gloves presence). Bottle of talc included. Attachment: 4 holes 3.5 mm dia., centre distances 155 x 345 mm. U.V. protection window.



CG-35/1 60 x 210 x 460 mm - Weight: 0.730 kg

Overgloves

Used as outer glove. Silicon grain leather, very flexible. Large protective cuff in chrome tanned hide. Adhesive strap.



EN 388

CG-99 (*) Weight: 0.170 kg * Add size: C, D

Carrying bag

Made from reinforced waterproof fabric for transport of rubber gloves in vehicles and tool boxes. Rear loop for belt and snaps.



CG-36 60 x 180 x 400 mm - Weight: 0.120 kg

Working gloves

Handling leather and cotton gloves. Docker type.



EN 388

CG-97-C Single size (C = 10)

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.



| Reference | Thickness (mm) | Dimensions (m) |
|--------------|----------------|----------------|
| MP-60/10-5 | 10 | 0.6 x 5 |
| MP-60/10-10 | 10 | 0.6 x 10 |
| MP-100/10-5 | 10 | 1 x 5 |
| MP-100/10-10 | 10 | 1 x 10 |

Insulating platform (outdoor model)

Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



| Reference | Rated insulation (V) | Number of skirts per foot | Height (mm) | Weight (kg) |
|-----------|----------------------|---------------------------|-------------|-------------|
| CT-9-63 | 63 000 | 4 | 515 | 7.00 |

Rescue sticks

Insulating sticks ended by a large hook in order to rescue quickly an electrified victim in case of accident.



| | |
|---------|---|
| CS-90* | Length: 2.05 m - Rated insulation: 90 kV |
| CS-225* | Length: 2.45 m - Rated insulation: 225 kV |

* Delivered with wall mounted supports.

Insulating platform (indoor model)

Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



| Reference | Rated insulation (V) | Height (mm) | Weight (kg) |
|-----------|----------------------|-------------|-------------|
| CT-7-63 | 63 000 | 340 | 3.35 |

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Equipment for working on pole

High voltage

Pro electric full body fall arrest harness

2 fall arrest attachment point: dorsal and sternal. Automatic buckles of the belt and leg loops. Elastic shoulder straps. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Tools holders. 3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.7 kg.



EN 358
EN 361
CE

MO-563(*) * add size: S/M/XL
S = small M = medium XL = large

Pro electric full body fall arrest harness

4 fall arrest attachment point : one dorsal point, two sternal points by two metallic D rings, a sternal point by strap. A ventral attachment point for a descender and / or lanyard. Automatic buckles of leg loops. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Tools holders. 3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.9 kg.



EN 358
EN 361
EN 813
CE

MO-564(*) * add size: S/M/XL
S = small M = medium XL = large

Full body fall arrest harness

2 fall arrest attachment point : dorsal and sternal. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Unique size. Delivered in a protective bag.



EN 358
EN 361
CE

MO-71 Weight: 1.9 kg

Equipped rope straps with lever stretcher

Equipped with adjuster. Hooks to belt with rapid link.



EN 358
CE

MO-52-L Length: 4 m - Weight: 1 kg

Anti-fall grip

The safety block runs freely on its rope but can be automatically locked in case of a sudden downward drop. Must be used only with special 15 mm Ø rope delivered with the device.



EN 353-3
CE

MO-68/10 With 10 m of rope - Weight: 2.300 kg
MO-68/15 With 15 m of rope - Weight: 3.250 kg

Double safety descent device

Articulated stainless steel cam. Aluminium housing. High-resistance handle. Operates with 9-12 mm diameter lanyard. Ideal for evacuation. Lets you regulate descent.



EN 361
CE

MD-02 Weight: 0.32 Kg

Tether rope with energy absorber

Tether rope in polyamide Ø14 mm.



EN 355
CE

MO-52020 Length: 1.50 m
MO-52021 Length: 2.00 m

Double tether rope with energy absorber

Double tether rope with energy absorber Equipped with 2 steel snap hooks with automatic locking and 1 steel snap hook with screwing locking



EN 355
CE

MO-54010 Length: 1.20 m - Weight: 1.4 kg

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Equipment for working on pole

Snap hooks (stainless steel)



MO-54

EN 362
CE

MO-54

Locks with threaded ring - Opening: 15 mm
100 x 58 mm - 0.154 kg



MO-55/1

EN 362
CE

MO-55/1

Locking by screwing ring on a spring loaded mobile catch; an additional catch is provided to prevent the rope from slipping in the carabiner - 155 x 75 mm - 0.140 kg

Snap hooks (aluminium alloy) zical



MO-54000

EN 362

MO-54000

Oval snap hook - Opening: 15 mm
Individually tested - Weight: 0.071 kg
110 x 58 mm



MO-54004

CE

MO-54004

D-shaped snap hook with automatic locking
Opening: 23 mm - Individually tested
Weight: 0.087 kg - 120 x 72 mm

Fall arrester - retractable type

Designed for lineman safety. Quick acceleration causes instant locking. Corrosion protected steel shell. Integrated braking mechanism and dissipating element. Self locking mechanism and automatic tensioning and return facility. Galvanized cable Ø 4 mm. Strength: 1 200 daN. Delivered with a screw crab. Max. length: 10 m.



EN 360

MO-591002

Weight: 7.00 kg

Snap hook with double safety latch



EN 362
CE

Opening: 50 mm
Body in steel
Fingers in stainless steel
Resistance: 20 kN.

MO-54002

Weight: 0.390 Kg

Tether rope equipped with a tension device

The tether rope is intended to ensure that operators are held in position when working at a height. This tether rope must be associated with a harness belt. Ends sewn to form an attachment and protected with a plastic girdle. Static resistance: 15 kN. Polyamide Ø 15 mm.



EN 358
CE

MO-56009

Weight: 1.425 kg - Length: 3 m

MO-56010

Weight: 1.600 kg - Length: 5 m

Safety rope with wear tell tales

Rope: 14 PEPT multi-filament (15 mm diam.)
Two-colour safety rope, 100% polyester made of 3 white strands with black central thread (wear telltale).
Buckle: Polyamide central lug attaches to snap-hook of belt.



EN 354
CE

MO-052

Safety rope only - Length: 4 m - 0.76 kg

Lanyard

Synthetic fibre ropes - 10 mm.
Loops spliced at both ends.
Delivered without snap hook.



EN 354
CE

MO-53

Length: 1.50 m - Weight: 0.125 kg

Anti fall device with automatic release strap

Winder with self-locking strap.
Length: 2 m.
Equipped with shock absorber.
Allows 2 m of movement autonomy around anchoring point.

EN 360



MO-591000 Weight: 1.160 kg

Constraint tie

Tie in polyamide.

EN 795
CE



| | |
|-----------------|-----------------------------------|
| MO-52031 | Length: 0.8 m - Weight: 0.100 kg |
| MO-52033 | Length: 1.20 m - Weight: 0.135 kg |
| MO-52034 | Length: 1.50 m - Weight: 0.150 kg |

Working on pole kit



| Reference | Use |
|------------------------|---|
| KIT-HAUT-01-(*) | To go up a pole with insulating ladders |
| KIT-HAUT-02-(*) | To go up a pole with spliced ladders |
| KIT-HAUT-03-(*) | To go up a catenary |
| KIT-HAUT-04-(*) | To go up on a pylon |
| KIT-HAUT-05-(*) | To go up on a roof |
| KIT-HAUT-06-(*) | To go up using a nacelle |

| Composition | KIT-HAUT- | | | | | |
|---|-----------|--------|--------|--------|--------|--------|
| | 01-(*) | 02-(*) | 03-(*) | 04-(*) | 05-(*) | 06-(*) |
| Harness MO-563 | ■ | ■ | ■ | | | |
| Harness MO-564 | | | | ■ | | |
| Harness MO-71 | | | | | ■ | ■ |
| Tether rope MO-52020 | ■ | | | | | ■ |
| Double tether rope MO-54010 | | ■ | | ■ | ■ | |
| Constraint tie MO-52034 | ■ | ■ | | | | |
| Constraint tie MO-52031 | | | | ■(2) | | |
| Tether rope with tension device MO-56009 | ■ | ■ | ■ | ■ | ■ | |
| Anti-fall grip MO-68/15 | ■ | ■ | ■ | ■ | | |
| Snap hook MO-54 | ■ | ■ | | | | |
| Carrying bag M-87-295 | ■ | ■ | ■ | ■ | ■ | ■ |

(*) add size : M or XL
order example : KIT-HAUT-02-XL.

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Equipment for working on pole

Insulating ladders

A complete range with top quality features: Insulation between two steps: 30000 V (test performed after immersion in water for 24 hours). High mechanical resistance to bending and twisting. Good resistance/weight ratio. High fire resistance. High resistance against bad weather and corrosive elements. Lateral risers in polyester/glass fiber rectangular section 70 x 25 mm. Aluminium alloy rungs with square 29 x 29 mm section and anti-slip coating.



EN 131
CE

Insulating 2 section extension ladders, hand operated

| Reference | Folded length | Extended length | Number of rungs | Weight (kg) |
|-----------|---------------|-----------------|-----------------|-------------|
| MP-514/2 | 2.41 (m) | 4.09 (m) | 2 x 8 | 13.9 |
| MP-515/2 | 2.97 (m) | 5.21 (m) | 2 x 10 | 17 |

MP-506...

MP-514...



Insulating 2 section extension ladders, rope and pulley operated

| | | | | |
|----------|----------|-----------|--------|----|
| MP-506/2 | 3.53 (m) | 6.05 (m) | 2 x 12 | 20 |
| MP-508/2 | 4.66 (m) | 8.30 (m) | 2 x 16 | 31 |
| MP-510/2 | 5.78 (m) | 10.26 (m) | 2 x 20 | 38 |

Services

Technical assistance

Training

Flexible workshop

Ask our specialist

+33 1 42 31 46 24

philippe.monteillet@catuelec.com

High voltage

Padlocks with warning signs

Brass ring bow 50 or 70 mm.
Diameter of the ring bow
4 or 6 mm.



| Reference | Ring bow (mm) | Ø (mm) | Weight (kg) |
|-----------------|---------------|--------|-------------|
| AL-230-(*)-EX | 50 | 6 | 0.170 |
| AL-230-S-(*)-EX | 70 | 6 | 0.190 |
| AL-230-Z-EX | 50 | 6 | 0.170 |
| AL-230-S-Z-EX | 70 | 6 | 0.190 |
| AL-240-(*)-EX | 50 | 4 | 0.170 |
| AL-240-S-(*)-EX | 70 | 4 | 0.190 |
| AL-240-Z-EX | 50 | 4 | 0.170 |
| AL-240-S-Z-EX | 70 | 4 | 0.190 |

* Add n° of key: 111 or 222
"00" n° standard key: n° of key upon request
Z: random n° of key

Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.



| | |
|--------|--|
| AS-404 | 4 markers in assorted colours (red, black, blue and green) |
|--------|--|

Safety locking badge

Fit with multiple locking apparatus AL-202
White letters on red aluminium
Fixing with 1 hole Ø 10 mm.



| | |
|-----------|---------|
| AM-467-GB | Ø 80 mm |
|-----------|---------|

Handle with 6 padlocks

Handle of moulded plastic for holding up to six padlocks.
Compartment with transparent cover for key storage.



| Reference | Weight (kg) | Handle with 6 padlocks |
|-----------------|-------------|------------------------|
| AL-236-111-EX | 1.150 | AL-230-111-EX |
| AL-236-S-111-EX | 1.210 | AL-230-S-111-E |
| AL-236-222-EX | 1.150 | AL-230-222-EX |
| AL-236-S-222-EX | 1.210 | AL-230-S-222-EX |

Multiple locking apparatus

Holds up to four padlocks and a sign.



AL-200



AL-202

| | |
|--------|-------------------------------------|
| AL-200 | 100 x 60 x 10 mm - Weight: 0.150 kg |
| AL-202 | 165 x 50 x 12 mm - Weight: 0.200 kg |

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



| | |
|-----------|------------------------------------|
| AL-207/10 | For 10 padlocks - Weight: 0.06 kg |
| AL-207/30 | For 30 padlocks - Weight: 0.130 kg |

Padlocks

Warning signs

Delineators

Substation signs

Warning signs

| Reference | Type | Dimensions | Characteristics |
|-----------|-----------|-------------|---|
| AM-41/1* | aluminium | 100 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-41/2 | aluminium | 200 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-49/1* | aluminium | 100 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-49/2 | aluminium | 200 mm side | black on yellow fixing: 3 holes Ø 4.5 mm |
| AM-344-GB | aluminium | 100 mm side | black letters on yellow fixing: 3 holes Ø 4.5 mm |
| AM-345-GB | aluminium | 100 mm side | black letters on yellow fixing: 3 holes Ø 4.5 mm |
| AM-344/05 | aluminium | 50 mm side | |
| AM-344 | aluminium | 100 mm side | |

*Pack of 10 units.



AM-41/1



AM-49/1



AM-344/05 - AM-344



AM-344-GB



AM-345-GB

Specialized signs

| Reference | Type | Dimensions | Characteristics |
|-------------|-----------|--------------|---------------------------------|
| AM-20-GB | aluminium | 350 x 250 mm | blue letters on plain aluminium |
| AM-20-RM | aluminium | 350 x 500 mm | blue letters on plain aluminium |
| AM-61-GB | aluminium | 150 x 200 mm | |
| AM-61-RM | aluminium | 150 x 200 mm | |
| AM-215-RM | aluminium | 350 x 250 mm | black on yellow SF6 warning |
| AM-282/2-RM | aluminium | 200 x 60 mm | |
| AM-7002 | aluminium | 300 x 200 mm | black on yellow |
| AM-33/3 | aluminium | Ø 300 mm | red-black on alu |
| AM-34/2 | aluminium | Ø 200 mm | red-black on alu |
| AM-32/3 | aluminium | Ø 300 mm | |
| AP-510-GB | plastic | 420 x 297 mm | golden rules |
| AP-951/2 | plastic | 200 x 200 mm | red on white |



AM-20-GB



AM-20-RM



AP-510-GB



AM-215-RM



AM-7002



AM-282/2-RM

Other models, please consult us!



AP-951/2



AM-33/3



AM-34/2



AM-32/3



AM-61-GB



AM-61-RM

Warning sign

Attachment: one hole Ø 10 mm.
Marking for indelible writing: see page ??.



AP-499/1

| Reference | Type | Ø (mm) |
|-----------|---------|--------|
| AP-499/1 | plastic | 100 |

Warning flags

Brightly colored ribbon.



AL-53

| Reference | Dimensions (mm) | Fixing |
|-----------|-----------------|-----------|
| AL-53 | 650 x 350 | on handle |

Grounding flags



AL-60



AL-58

| | |
|-------|---|
| AL-58 | Fixing on handle; for work site |
| AL-60 | Fixing on earthing cable; for immediate identification in open-type switchgears possible inscription: 0 to 99 (by using ALU-SCRIPT markers) |

Safety boundary post

For temporary installation.
Used with tough link chain delineators (AL-32/05)
Removal Foot.
Ø 50 mm.
Height: 0.9 m.



AL-316

AL-318

| | |
|--------|-----------------------------------|
| AL-316 | Red and white - Weight: 4.2 kg |
| AL-318 | Black and yellow - Weight: 4.2 kg |

Chain delineators

Polyamide chains.



AL-31/25



AL-32/05


| | |
|----------|--------------------------------|
| AL-31/25 | Red and white - Length: 25 m |
| AL-31/05 | Red and white - Length: 5 m |
| AL-32/05 | Black and yellow - Length: 5 m |
| AL-31 | Opening ring for AL-31/25 |

Delineators

Brightly colored ribbon.
Snap hook on one ribbon end and another on spool.
A ring on spool brakes ribbon at desired length.
wide: 50 mm
length: 20 m.



AL-62-A

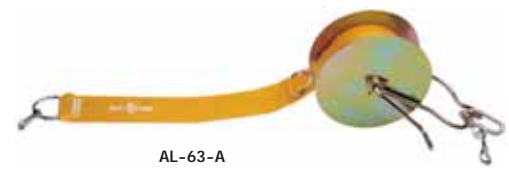

AL-63-A

| | |
|---------|---------------|
| AL-62-A | Red ribbon |
| AL-63-A | Yellow ribbon |

63 to 550 kV electronic voltage detectors for indoor and outdoor use

Designed to give users maximum safety, the DETEX detectors of the CC-245 Series are the result of the most modern developments in electronic research. They offer a number of important properties and advantages.

Double signalling

Voltage presence indicated at the same time by:

- 4 extremely bright red flashing electro-luminescent diodes (visible at more than 50 meters even in direct lighting),
- a powerful rated acoustic signal (60 dB/2 m).

Checking

Satisfactory operation of the unit is indicated:

- When pressing the test button, by:
 - the red diodes flashing,
 - the acoustic signal sounding.
- When releasing the TEST button, by:
 - timed green up diodes lighting.

As long as they light, the unit continues its self-testing and the detector is fully operational.

High specifications

- Detectors are adjusted, tested and controlled one by one.
- Remarkably resistant to impacts, vibrations, extreme temperatures, humidity and sudden changes in the atmosphere (condensation, freezing).

- Precise and stable operating threshold. **IEC-61243-1**
- Insensitivity to induced voltages by limiting the operating voltage range. **CE**
- Robust housing made from polycarbonate with high mechanical properties and dielectric strength.
- The contact electrodes are simply screwed to the housing and are therefore easily interchangeable.

Power supply

- One 9 V battery type 6 LR 61.

End fittings:

- "C" for hexagonal sticks.
- "K" for universal sticks.


Weight

650 g (with battery).

Packaging

Units supplied complete with battery and electrode in a rigid synthetic case with handle.

- Recommended sticks: CM-4000 serie. See page 114.

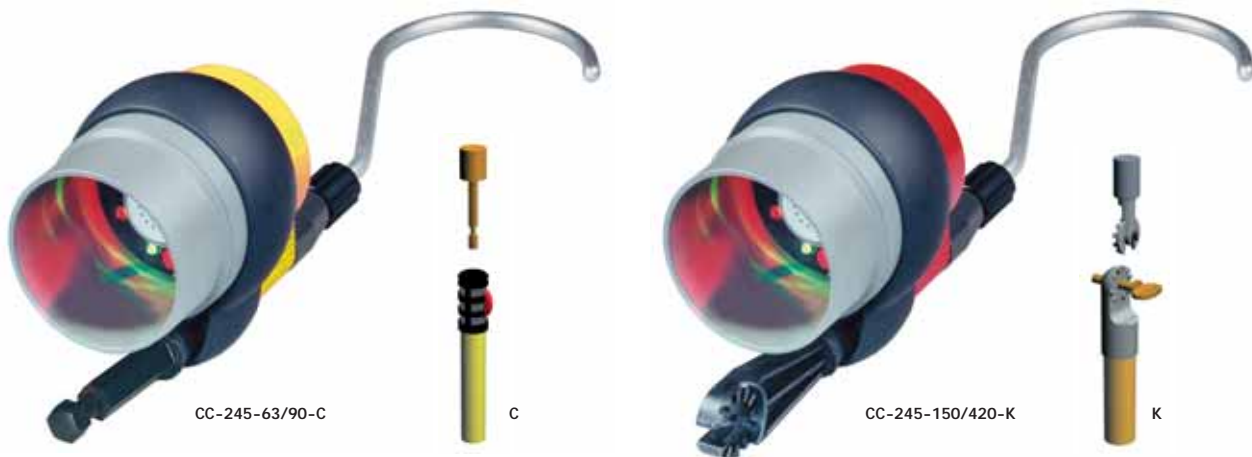

| Reference | Operating voltage (Ph/Ph-kV) | Contact electrode Ø mm | Body colour | Freq. (Hz) |
|---------------------------|------------------------------|------------------------|-------------|------------|
| FRENCH STANDARD NETWORKS | | | | |
| CC-245-63/90...* | 63-90 | 120 | Yellow | 50 |
| CC-245-225/420...* | 225-420 | 200 | Red | 50 |
| BRITISH STANDARD NETWORKS | | | | |
| CC-245-66/132-K | 66-132 | 200 | Red | 50 |
| OTHER MODELS | | | | |
| CC-245-60/150-K | 60-150 | 120 | Red | 50 |
| CC-245-63/150-K | 63-150 | 120 | Red | 50 |
| CC-245-90/225-K | 90-225 | 120 | Red | 50 |
| CC-245-150/420-K | 150-420 | 200 | Red | 50 |
| CC-245-225/550-K | 225-550 | 200 | Red | 50 |

* Please specify type of mounting when ordering: C or K.

For other voltages, or 60 Hz Frequency detectors (CC-246 Serie) please consult us.

Insulating sticks for voltage detectors and earthing systems

IEC-60855

These 39 mm dia. elements are assembled using a new safety bayonet system connector in aluminium alloy. They allow construction of a large variety of custom made sticks that meet the most varied conditions of application. Calibrated lengths of 1 to 3 meters (with fraction of 0.50 m) permit a huge number of applications.

This range thus allows a stick-length limitation in case of space requirements and carrying capabilities.

For common applications a serie of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.

CM4000

Complete stick with end pieces and hell

| Reference | Complete stick length (m)* | Complete stick length (m)** | Insulating length (m) | Weight (kg) |
|---|----------------------------|-----------------------------|-----------------------|-------------|
| Basic elements | | | | |
| CM-4610 | 1.13 | | 0.08 | 1.35 |
| CM-4615 | 1.63 | | 0.33 | 1.80 |
| CM-4620 | 2.13 | | 0.33 | 2.80 |
| CM-4625 | 2.63 | | 0.83 | 3.30 |
| Intermediate element | | | | |
| CM-4610-I | 1.165 | | 0.8 | 1.30 |
| CM-4615-I | 1.665 | | 1.3 | 1.70 |
| CM-4620-I | 2.165 | | 1.8 | 2.60 |
| CM-4625-I | 2.665 | | 2.3 | 3.10 |
| Terminal elements | | | | |
| CM-4610-* | 1.115 | 1.21 | 0.78 | 1.00 |
| CM-4615-* | 1.615 | 1.71 | 1.28 | 1.40 |
| CM-4620-* | 2.115 | 2.21 | 1.78 | 2.20 |
| CM-4625-* | 2.615 | 2.71 | 2.28 | 2.70 |
| Fixed length sticks | | | | |
| CM-4115-* | 1.575 | 1.675 | 0.82 | 1.35 |
| CM-4120-* | 2.075 | 2.175 | 1.07 | 1.80 |
| CM-4125-* | 2.575 | 2.675 | 1.32 | 2.80 |
| CM-4130-* | 3.075 | 3.175 | 1.82 | 3.30 |
| Intermediate elements with rain skirts | | | | |
| CM-4600-J | 0.36 | | | 0.95 |

* Add end piece C, K, E.

• With the smallest end fitting.
 •• With the biggest end fitting.



Set of sticks

Complete sets of sticks for standard applications. IEC-60855

| Reference | Working distance (m) | Composition |
|-----------|----------------------|---|
| CM-4220* | 2 | 2 elements: CM-4610+CM-4610-* |
| CM-4230* | 3 | 2 elements: CM-4615+CM-4615-* |
| CM-4240* | 4 | 2 elements: CM-4620+CM-4620-* |
| CM-4345* | 4.5 | 3 elements: CM-4615+CM-4615-I+CM-4615-* |
| CM-4360* | 6 | 3 elements: CM-4620+CM-4620-I+CM-4620-* |

* Add end piece C, K, E.

For cables < 95 mm² CM-4000 serie is recommended.

Carrying and storage stick case

Case especially designed for Ø 39 mm new range sticks. Carrying capacity: 3 elements.



CM-3000 480 x 330 x 120 mm - Weight: 1.2 kg

Clamps


Insulating sticks and earth clamps

Fixed points and cables

Accessories

HV and EHV clamps manoeuvrable by insulating stick


Body in aluminium alloy with trapezoidal threaded screw. Interposed elastic washers in the clamping system improve efficiency and insure a higher withstand in case of electrodynamic shock. Manoeuvring by CM-6 insulated stick of appropriate length and characteristics.

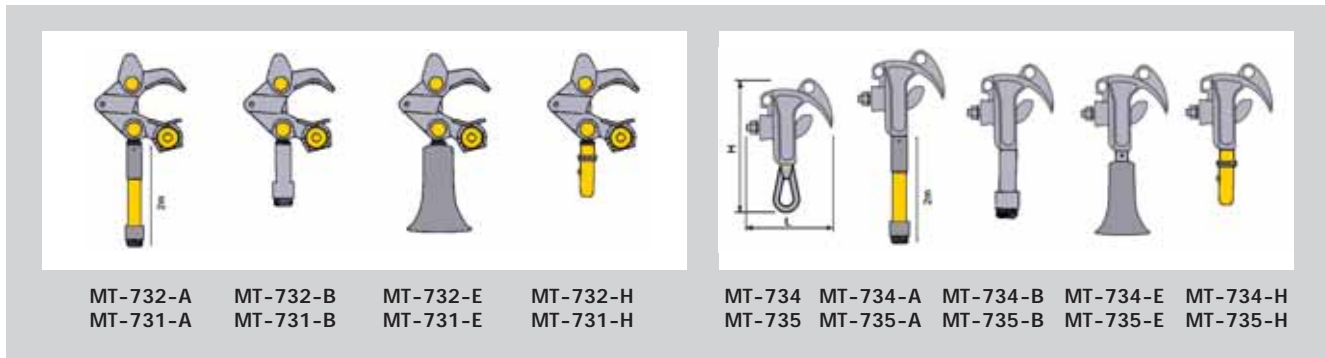

| Reference | Clamping capacity (Ø mm) | Test current (kA/1s) | Copper connection | | | Weight (Kg) | Dimensions (mm) h x L x thickness |
|-----------|--------------------------|----------------------|--------------------------------------|--------------------------|--------------|-------------|--------------------------------------|
| | | | Copper cables (mm ² max.) | Contact range width (mm) | Stud or hole | | |
| MT-731* | 5-60 | 40 | 150 | 45 | M 12 | 1.45 | 200 x 200 x 50 |
| MT-732* | 40-120 | 40 | 150 | 45 | M 12 | 1.45 | 200 x 200 x 50 |
| MT-734* | 5-40 | 40 | 150 | 40 | M 12 | 0.8 | 145 x 125 x 52 |
| MT-735* | 15-60 | 40 | 150 | 40 | M 12 | 0.8 | 195 x 135 x 45 |
| MT-737* | 20-120 | 40 | 150 | 40 | M 12 | 1.35 | 340 x 200 x 55 |

* Add type of connection A - B - E - H.

Attachment of MT-734/MT-735 clamps with MT-717-3-B hook.

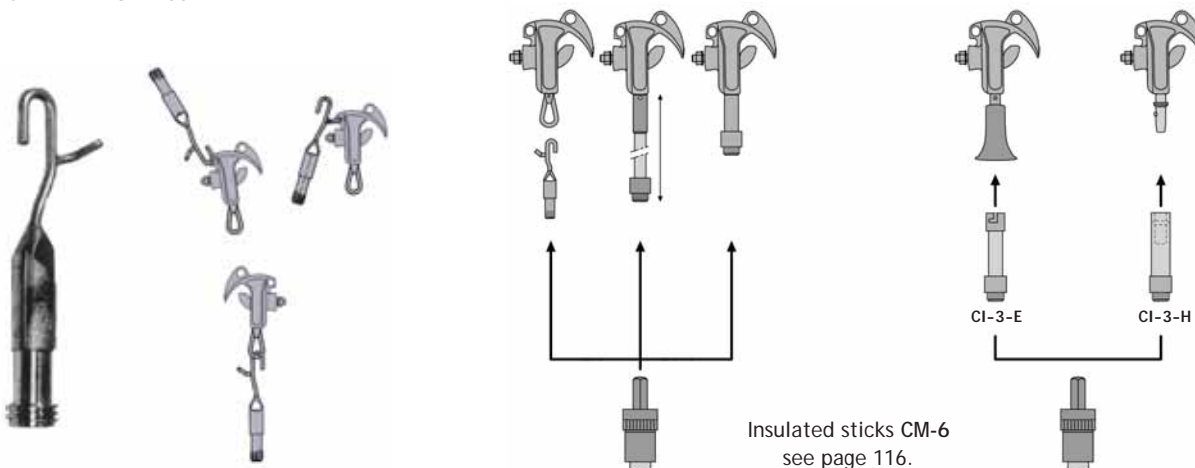

Insulated sticks CM-6 see page 116.

Insulating sticks for short circuiting and earthing systems

- 46 mm dia. single type elements, yellow colour, with superior characteristics, they are connected between them without any prior order of assembly.
- These elements allow "long length" assemblies which can support short-circuit systems with large cross-section cables.
- Shockproof guard and pole end cap.

| Reference | Length (mm) | Weight (Kg) |
|-----------|-------------|-------------|
| CM-6-15 | 1.5 | 2.40 |
| CM-6-20 | 2.0 | 3.20 |
| CM-6-25 | 2.5 | 4.00 |
| CM-6-30 | 3.0 | 4.80 |



For cables ≥ 95 mm² CM-6 series is recommended.

Earth clamps

Copper aluminium bronze earth clamps.

| Reference | Test current | Dimension (mm) Weight (kg) | Connection | Clamping capacity (mm) |
|-----------|--------------|-------------------------------|------------------|------------------------|
| MT-843 | 40 kA/1 s | 45 x 106 x 165 0.95 | hole: Ø 13 mm | • Ø 6-35 - 0-35 |
| MT-847 | 30 kA/0.5 s | 45 x 106 x 170 1.00 | hole: Ø 13 mm | - 0-25 |
| MT-852 | 40 kA/1 s | 70 x 125 x 155 1.40 | hole: Ø 13 mm | Fixed points |
| MT-853 | 40 kA/1 s | 65 x 130 x 135 1.00 | hole: Ø 13 mm | Fixed points |



Clamps

Insulating sticks
and earth clamps

Fixed points
and cables

Accessories

Adjustable fixed points

For large vertical or oblique heavy duty conductors.

| Reference | Rating insulation (kA/1s) | Weight (kg) | Dimensions L x W x T (mm) | Conductors Type | Conductors Ø (mm) | Description |
|-----------|---------------------------|-------------|---------------------------|-----------------|-------------------|-------------|
| MT-790 | 30 | 1.400 | 255 x 105 x 50 | copper | 12-60 | arm Ø 18 mm |
| MT-792 | 30 | 0.855 | 270 x 105 x 60 | aluminium | 12-60 | arm Ø 20 mm |
| MT-797 | 20 | 1.200 | 240 x 170 x 60 | aluminium | 60-120 | arm Ø 20 mm |



Copper and aluminium cables

Copper cables

Extra flexible braided multi-strand cables.

A Transparent PVC sheath, with cable section identification.

IEC-61230

B Transparent silicon sheath according to IEC-61230. Resistant to temperature variations (-40 °C to +70 °C) with double IEC triangle marked on cable section.



| A | B | Rating (kA/1s) | Cable | | Section (mm ²) |
|----------|---------------------|----------------|---------------|--------|----------------------------|
| | | | Weight (kg/m) | Ø (mm) | |
| M-24-70 | M-24-70-S IEC-61230 | 16 | 0.768 | 12 | 70 |
| M-24-75 | | 20 | 0.800 | 12 | 75 |
| M-24-95 | M-24-95-S | 20 | 1.000 | 14 | 95 |
| M-24-120 | M-24-120-S | 30 | 1.280 | 17 | 120 |
| M-24-150 | M-24-150-S | 36 | 1.630 | 19 | 150 |

Aluminium cables

Extra flexible braided multi-strand cables.

Transparent PVC sheath, with cable section identification.



| Reference | Rating (kA/1s) | Cable | | Section (mm ²) |
|-----------|----------------|---------------|--------|----------------------------|
| | | Weight (kg/m) | Ø (mm) | |
| M-28-70 | 10.0 | 0.240 | 13.4 | 70 |
| M-28-120 | 17.5 | 0.430 | 19.00 | 120 |
| M-28-150 | 20.0 | 0.510 | 21.00 | 150 |

Jumper cables realisation specially manufactured items



Quotations in accordance with faisability.
For all details:
Tel.: 33 142314624 / www.catuelec.com

Earthing kit support

Welded steel assembly with galvanization surface treatment.
Writing zone available.



MT-895 230 x 230 x 150 mm - Weight: 0.9 kg

Rope operated clamp

Description

V-shaped aluminium body.
Spring operated swinging jaw with pre-set.

Operation

Attachment and removal is carried out from the ground or from the cross-arm, using a rope passed previously over the conductor to be earthed.

- Attachment: the clamp is pulled up by the rope. Pulling on the rope triggers the spring and closes the jaw.
- Removal: pulling on the rope attached to the hinged saddles causes the clamp to pivot and free the jaw.

For conductors reached from the ground:

- up to 10 m: by using MT-709-B reel launcher placed on a CM-6 SERIE Stick (see page 96) that passes the rope over the conductor;
- up to 20 m: by using a MF-60 wire projector. This projector fires an arrow carrying a braided nylon wire which sets the rope. The clamp is then fixed to the rope and attached onto the conductor.

- Earthing cable with ranger (mm²): 2 x 120.
- Cable connection crimped log hole: M 12.



| Reference | Clamping capacity (Ø mm) | Rating insulation (kA/1s) | I asymmetrical (A) | Dimensions (mm) h x L x thickness | Weight (Kg) |
|-----------|--------------------------|---------------------------|--------------------|-----------------------------------|-------------|
| MT-701/1 | 12-48 | 30 | 72 | 195 x 120 x 175 | 2.00 |

Cable-launcher projector

Used to fire the insulating rope for setting the MT-701/1 clamp, this wire-projector may also be used for checking the absence of voltage from the ground by throwing a very light fuse wire over the conductor (in case of voltage, arcing will occur to warn the operator).

- MF-60** Wire-projector
- MF-61** Spare arrow
- MF-62** Spool of 30 m of fuse wire
- MF-63** Spool of 100 m of fuse wire
- MF-66** Spool of 30 m of nylon lead



Reel launcher and insulated rope reel

This device contains a shaft on which the rope reel is engaged, and a spring system which triggers the ejection of the reel when it comes in contact with the conductor. To be fixed on a MAJOR SERIE Stick, depending on the height of the conductor to be reached.



MT-709-B

MT-708-40

- MT-709-B** Aluminium alloy launcher - Weight: 0.310 kg
- MT-708/40** Special quality nylon on shock proof reels; equipped with 2 snaps. Rope Ø 6 mm - Length: 40 mm

Short-circuiting and earthing systems carrying bags

Strong water proof canvas. Reinforced bottom.

- M-87-53** 380 x 250 - Height: 400 mm - Weight: 2 kg
- M-87-153** 380 x 250 - Height: 600 mm - Weight: 2.5 kg
- M-87-295** 550 x 300 x 300 mm - Weight: 2 kg



M-87-295

M-87-53

Specification for short-circuiting and earthing systems



A Network, electrical installation characteristics

Network voltage: _____ kV
 Nature of the conductive materials: Basis Al Basis Cu Max. short-circuiting current (1s): _____ kA

Overhead lines

- Dia. or section of the conductors: min. _____
 max. _____

Switchboard or substation

- Round bars dia. (mm): mini. _____ maxi. _____

Length = _____
 - Flat bars
 H type Thickness = _____
 V type Length = _____
 Thickness = _____

- Fitting on edge face Fitting on side face

B Characteristics of the earthing system

- Selected sketch (out of the three standard types shown below)
- Distance between live conductors (m): _____, between live conductors and grounding point (m) _____
- To place the clamps in position, the operator will stand: above the conductors under the conductors
 at the conductors level
- For cable sections, please indicate max. ΔT or min. dia. of the conductor _____

C Earthing connection point

- Earth rods: dia. or thickness on side face (mm): _____ Flat bar, angle-bar, thickness (mm): _____
- Round conductor dia. (mm): _____

D Operating stick

- Insulating stick: total length _____ Fixed Connectable stick Telescopic


Characteristics

- Selected connection type: Sketch n° _____
- Contact clamps (type MT- _____)
- Short-circuiting cable
 - Length (m) _____
 - Dia. or section (mm, mm²) _____
- Grounding cable
 - Length (m) _____
 - Dia. or section (mm, mm²) _____
- Connection of cables on clamps, earth clamps, trifurcation
 - Direct connection by screw and nut
 - Connection by means of crimped lugs
- Earth clamp, type _____
- Presence of a reel _____
- Insulating stick, type _____


Sketch N°1



Sketch N°2



Sketch N°3



Accessories

- Carrying bag for sticks
- Canvas bag for equipment
- Carrying case for equipment
- Cable reel



DISTRIBUTED BY:



Group Sicame

www.catuelec.com

10/20 Avenue JEAN-JAURES • B.P.2 • 92222 BAGNEUX CEDEX (FRANCE)

Phone: + 33 1 42 31 46 00 • Fax: + 33 1 42 31 46 34