


Short-circuiting systems for bare L.V. overhead lines

IEC 61230

For conductors: 3 - 15 mm Ø.
 Easily attached by snapping on with a firm downward pull.
 Released by lateral swinging, no need to push upwards.
 First grip installed by insulating stick.
 First clamp/stick connection has automatic ratchet.
 Waterproof bag.
 To be completed with earthing equipment. See page 28.

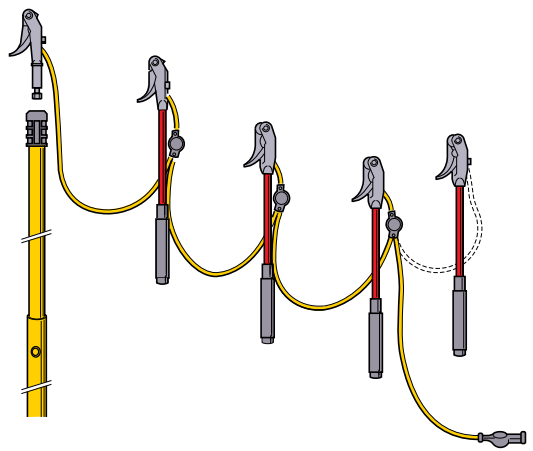


Packaging: waterproof bag 250 x 85 x 1160 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Number of clamps	Insulated telescopic stick
MT-404	3	16	3.4	3 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-405	3	16	3.8	4 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-406	3	16	4.2	5 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-407	3	16	4.6	6 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m

Short-circuiting and earthing systems

Lowlock system:
 For conductors 3 to 21 mm Ø.
 With clamps type "snap-on/screw-on".
 Connecting cables: 35 mm² copper.

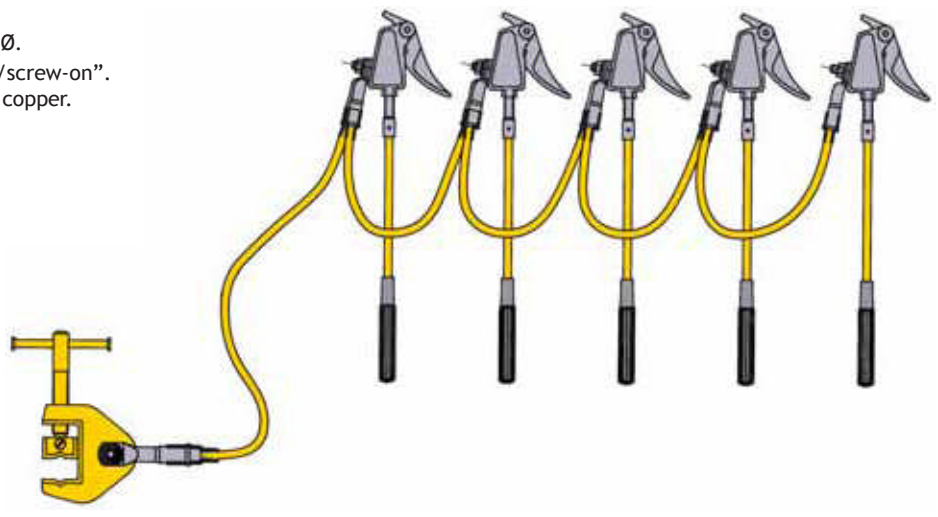

Reference	Rating (kA/1s)	Weight (kg)	Composition
MT-615/1-7,5	7.5	3	5 MT-616/1-03 contact clamps on handles (l = 0.35 m each) 4 braids of M-24-35 copper cable (1.00 m) 1 M-87-153 carrying bag 250 x 85 x 750 mm
MT-615/2-7,5	7.5	6.5	5 MT-616/1-03 contact clamps on handles 4 braids of M-24-35 copper cable (1.00 m) 1 braid of M-24-35 copper cable (7.00 m) 1 MT-840/1 earth clamp

Low voltage




CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
 FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
 FURSE EARTHING
 www.cablejoints.co.uk
Thorne and Derrick UK
 Tel 0044 191 490 1547 Fax 0044 191 477 5371
 Tel 0044 117 977 4647 Fax 0044 117 9775582

Short-circuiting systems for insulated L.V. overhead lines

Connected to female sockets permanently installed on power lines. Equipment includes either 5 or 6 copper-aluminium alloy stubs with bayonet locking and insulating cap. To be completed with earthing equipment. See below.

IEC 61230

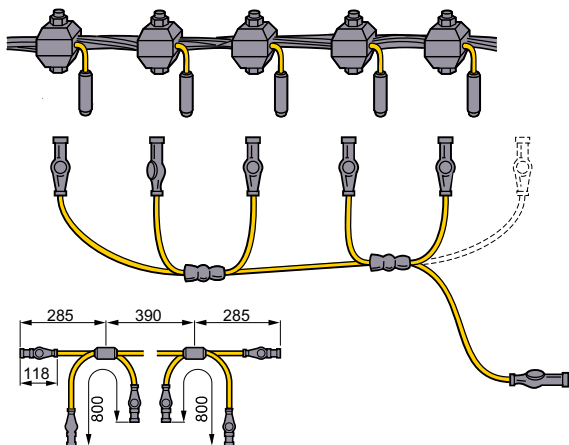


Packaging: polypropylene case - 234 x 215 x 75 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Composition
MT-205	4	16	1.10	5 stubs
MT-206	4	16	1.50	6 stubs
MT-207	4	16	1.9	7 stubs

Earthing equipment

Earthing equipment with bayonet splicing. Earth rod to be ordered separately. See below.

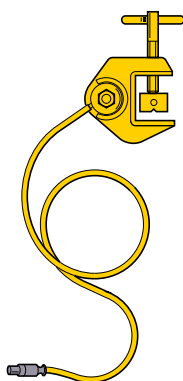

Packaging: polypropylene case - 310 x 280 x 105 mm.

Reference	Weight (kg)	Cable (m x mm ²)	Earth clamp
MT-245	3.0	10 x 16	MT-840/1
MT-249	3.8	15 x 16	MT-840/1

Earth rod

For use with earthing equipment
Hexagonal 18 mm per side.
Galvanized steel.



MT-650 Length: 1 m - Weight: 2.2 kg

Short-circuiting system for consumer units

The link assemblies, included in this equipment, consist of extra flexible 16 mm² multistrand copper cable with an IEC 1230 silicone envelope, recommended for indoor equipment.

The elements contained in the case can be used for establishing the equipment suited to the unit to be processed. The cartridge equipment is intended for HBC 22 x 58 mm fuse cartridge connection boxes and knife cartridges size 00. The knife equipment is intended for connection boxes or knife switch networks.

The mini-clip equipment is designed for the short-circuiting of take-off boxes more particularly using intermediate parts (sockets with 10 mm Ø terminals and M8 hexagonal end). The standard equipment for a three phase installation includes: the sets of cartridges, knives or mini-clips for adaptation to any type of unit, the interconnecting assemblies consisting of 4 extra flexible 16 mm² copper cables connected at the center by a connector, 1 installation and crimping kit. Rating: 4 kA/1s Weight: 4.3 kg.

Reference	Composition
MC-290/2	8 cartridges 8 cartridges type "00" 8 clamps 8 M8 connections 2 (280 x 320 mm) cable connections 2 (370 x 440 mm) cable connections 1 M8 key wrench 1 right angle hexagonal key wrench 4 mm 1 13/17 and 14 mm open end spanner 1 handle MC-161



Short-circuiting system for L.V equipment ISOSTOP™ system

Rating: 6 kA/1S
 Standard equipment composition: 1 or 2 sets of 3 knives, cables connections: H07 RN-F 25 mm², 1 earth clamp MT-841 1 handle MC-161.

Reference	Composition	Weight (kg)
MC-165/40	3 MC-160 earth cable 0.60 m	4.00
MC-175/40	3 MC-115 earth cable 0.60 m	3.75
MC-166/40	3 MC-115 3 MC-160 earth cable 0.60 m	5.60
MC-166/60	3 MC-115 3 MC-160 earth cable 6 m	4.20



Jumper cable with clamps on insulated handle

2 clamps on insulated handle - MT-315
 Capacity (mm): Ø 4 - 27 - 40
 Cable connection: 35 mm²
 Rating: 6 kA/1s
 Continuous rating: 75 A
 Clamp material: copper aluminium alloy
 1 insulated cable
 Length: 1 m, Section: 25 mm².

MT-315/2	Dimensions: 40 x 60 x 910 mm - Weight: 0.530 kg
-----------------	-------------------------------------------------




Short-circuiting equipment

Connecting set formed by extra flexible multi-strand copper cables 16 mm² with silicon sheath according IEC-61230.
Wide use temperature range (-40°C, +70°C).
No toxic smokes emission in case of short circuit.

IEC 61230

Reference	Designation
MC-296-440	Connection set 440 + 370 mm*
MC-296-320	Connection set 320 + 280 mm*

* Other models and length on request.

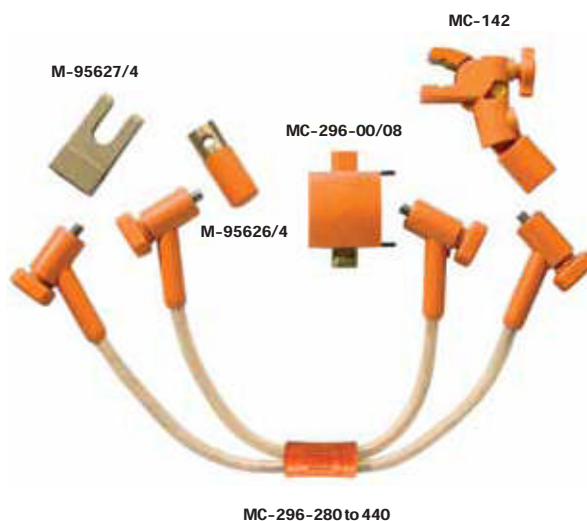


Set of: cartridge, connecting blade and jumper clamp.

Reference	Designation
M-95627/4*	Connecting blade
M-95626/4*	Round cartridge HPC 22 x 58
MC-296-00/08*	Cartridge size 00
MC-142	Jumper clamp


* Set of 4.

MC-296-115/12 or MC-296-115/08

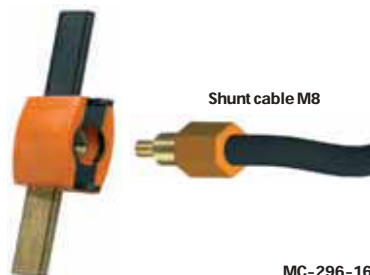

Shunt cable M8

MC-296-160/12

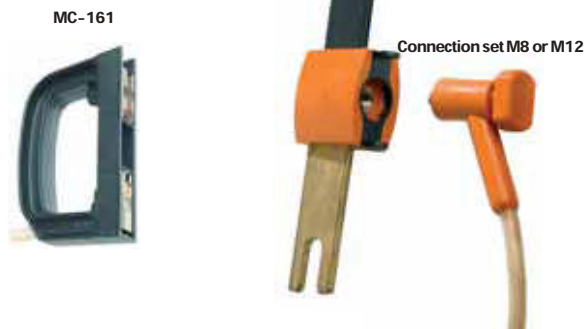

MC-161

Connection set M8 or M12

MC-161	Manœuvring handle
---------------	-------------------

Case (340 x 250 x 80 mm) for specific set. Réf.: M-91209.

Connecting blades M8 or M12

Reference	Designation
MC-296-115/08*	Between axes 115 mm M8
MC-296-115/12*	Between axes 115 mm M12
MC-296-160/12*	Between axes 160 mm M12

* Set of 4.

To be used with jumper cable (M8 or M12) connection cable (on request).

Additional equipment:

- Jumper cable (see page N° 36)
- Threated adapter (see page N° 37)



Mini jumper clamps fully insulated for switchboard use

These clamps are specially designed for use on energized parts in LV installations (switchboards, etc.) to make temporary connections when limited space is available. Models with jaws designed to axially grip conductors can be used on threaded bolts or shanks and nuts. The MC-142 model, whose size has been reduced to the strict minimum, is designed to be tightened with a nut wrench. All other models in this series tighten with T-handle screw. All clamps receive cable terminals with ISO 8 mm pitch threading as in the MC-153 series (described below). Current rating: 200 A.



MC-141



MC-142



MC-143



MC-144



MC-145



MC-146



MC-147



MC-148



MC-148/1



MC-149

Reference	Clamp capacity to main conductor	Orientation with respect	Size (mm)	Weight (kg)
MC-141	Six-sided 17-19 mm		71 x 150 x 24	0.26
MC-142	Round 6-10 flat 0-5 mm	Axial (at cable end) + transversal	58 x 38 x 33	0.130
MC-143	Flat bar, thickness 2-25 mm		67 x 145 x 26	0.230
MC-144	Round 8-12 square 9-10 mm	Axial (at cable end)	150 x 75 x 23	0.280
MC-145	16-75 mm ²	Transversal	110 x 70 x 23	0.220
MC-146	38-240 mm ²	Transversal	110 x 70 x 23	0.230
MC-147	Threaded rod M8		66 x 98 x 25	0.18
MC-147/1	Threaded rod M10		66 x 98 x 25	0.195
MC-148	Clamp with tapped revolving rod end M8, 200 A shunt. To be used with an insulated six-sided male hex key 5 mm.		66 x 80 x 25	0.175
MC-148/1	Clamp with tapped revolving rod end M8 for 10 to 50 mm cable		66 x 80 x 25	0.175
MC-149	Bar 20-30 mm width		56 x 165 x 58	0.486

Jumper cables with threaded ferrules

To be used in conjunction with any of the clamps described above to make jumper equipment suit most any need both quickly and easily. Cable is IEC-60245 type, either 35 mm² current rating: 200 A or 50 mm² current rating: 250 A, depending on the models. Delivered with screwing ISO M8.



Section: 50 mm²

Section: 35 mm²

MC-153/05	Length: 0.50 m - Weight: 0.270 kg
MC-153/10	Length: 1.00 m - Weight: 0.570 kg
MC-153/30	Length: 3.00 m - Weight: 1.720 kg
MC-153/60	Length: 6.00 m - Weight: 3.460 kg

MC-155/05	Length: 0.5 m - Weight: 0.380 kg
MC-155/10	Length: 1.00 m - Weight: 0.760 kg
MC-155/20	Length: 2.00 m - Weight: 1.520 kg
MC-155/30	Length: 3.00 m - Weight: 2.280 kg
MC-155/60	Length: 6.00 m - Weight: 4.560 kg
MC-155/80	Length: 8.00 m - Weight: 6.080 kg