

RECOMMENDED METHOD OF LACING CABLE STOCKINGS

SLINCO SPLIT LACE STOCKINGS

LOW TENSILE LACE WIRE METHOD OF LACING

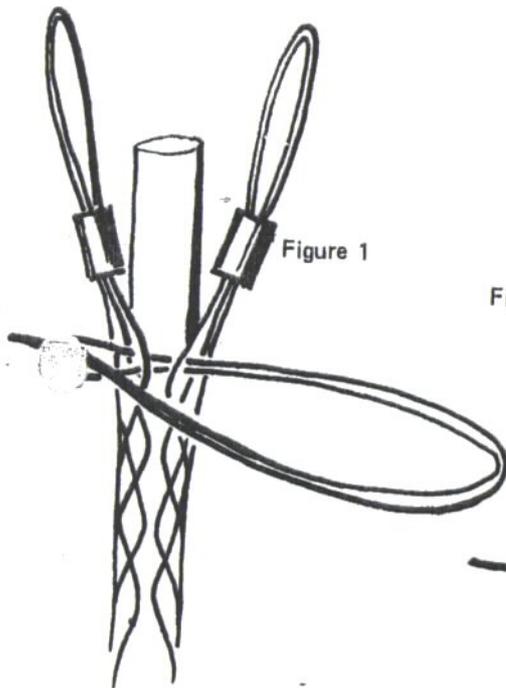


Figure 1

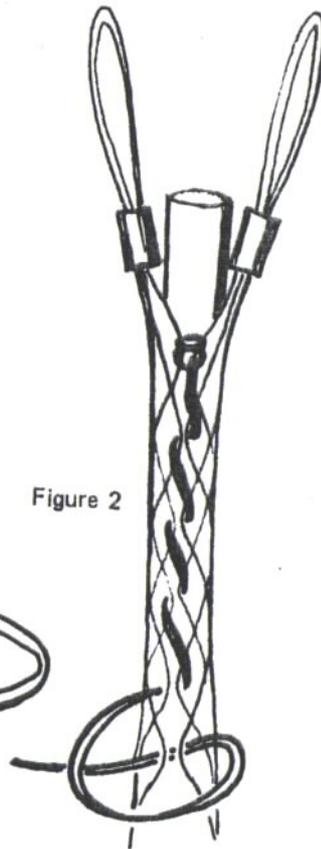


Figure 2

Your Stockings are supplied with laces attached. The recommended method of securing sock with the soft lace is as illustrated in Figure 1 and Figure 2.

If possible commence lacings from eye end (see sketch fig. 1) Having made about four passes, concertina sock by pushing bottom towards eye and continue lacing. After lacing, the split sides should ideally be touching or almost touching.

HIGH TENSILE LACE WIRE METHOD OF LACING

1 Start the lacing at the lead or anchoring end of the Grip. Thread the lacings through the first two loops of the split and pull through until the lacings are centered at this point.

2 Lace as you would your shoe, crossing the lacings before lacing the next two loops.

3 Don't pull lacing too tight. Leave a space between adjoining loops approximately equal to the width of one diamond of the mesh.

4 Twist the lacing strands tightly together at the tail end of the Grip.

5 Wrap the ends of the lacings once or twice tightly around the tail of the Grip, twisting the ends together securely. Excess lace can be cut off.

