





## Installation Instructions Atlas Cleat

### Multi-Cable

### Single Cable

- 1) Where it is required first remove the base pad. Bolt the cleat to the support structure.

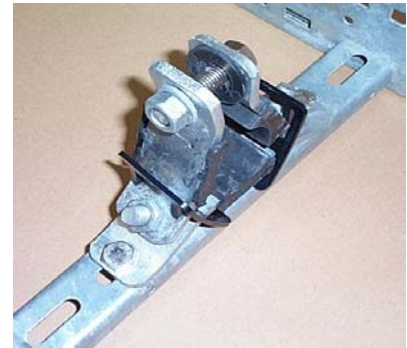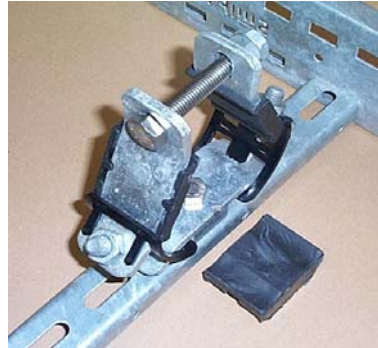

- 2) Replace the base pad, remove the Set Screw, nuts, and washer. Install the cables.



- 3) Replace the Set Screw, washer and nuts. Tighten the cleat.



- 4) **Important:** Do not over tighten the cleat. The cleat should secure the cable but does not need to be so tight that the cable bulges at either side of the cleat.

