


## Installation Instructions Atlas Cleat

### Multi-Cable

### Single Cable

1) Where it is required first remove the base pad. Bolt the cleat to the support structure.

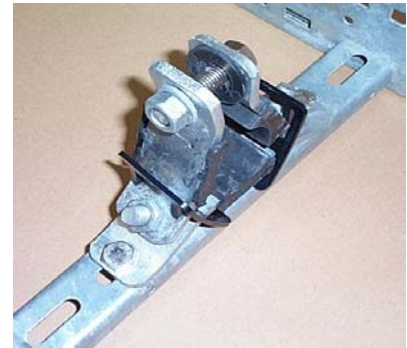

2) Replace the base pad, remove the Set Screw, nuts, and washer. Install the cables.



3) Replace the Set Screw, washer and nuts. Tighten the cleat.



4) **Important:** Do not over tighten the cleat. The cleat should secure the cable but does not need to be so tight that the cable bulges at either side of the cleat.

