HEAVY DUTY COPPER TUBE TERMINALS

CE

2A-M

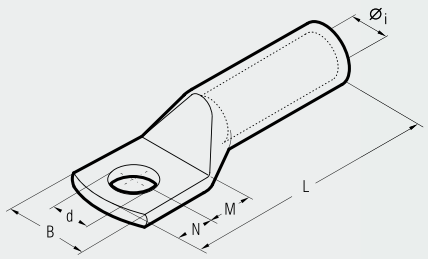

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm Øi	B	M	N	L	d	Quantity Box/Bag	Mechanical Tools HN 5	TN 70 SE	TN 120 SE	Hydraulic Tools B 15	HT 45-E	HT 51	RH 50	B 51	B 55	HT 81-U	RHU 81	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
16	8	2 A 3-M 8	5,8	15,0	9	8	43,5	8,4	600/100	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	10	2 A 3-M10	5,8	18,0	11	10	47,5	10,5	500/100	●	●	●	●	●	●	●	●	●	●	●	●	●	●
25	8	2 A 5-M 8	7,0	15,0	9	8	51,0	8,4	400/100		●	●	●	●	●	●	●	●	●	●	●	●	●
	10	2 A 5-M 10	7,0	18,0	11	10	55,0	10,5	300/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 5-M 12	7,0	21,0	14	12	60,0	13,2	300/50		●	●	●	●	●	●	●	●	●	●	●	●	●
35	8	2 A 7-M 8	8,9	17,0	9	8	53,0	8,4	250/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	10	2 A 7-M 10	8,9	19,0	11	10	57,0	10,5	250/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 7-M 12	8,9	21,0	14	12	62,0	13,2	250/50		●	●	●	●	●	●	●	●	●	●	●	●	●
50	10	2 A 10-M 10	10,0	20,0	11	10	63,0	10,5	200/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 10-M 12	10,0	21,0	14	12	68,0	13,2	150/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	14	2 A 10-M 14	10,0	25,0	16	14	72,0	15,0	150/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	16	2 A 10-M 16	10,0	26,0	18	16	76,0	17,0	150/50		●	●	●	●	●	●	●	●	●	●	●	●	●
63 70	10	2 A 14-M 10	11,3	21,0	11	10	70,0	10,5	100/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 14-M 12	11,3	22,0	14	12	75,0	13,2	100/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	14	2 A 14-M 14	11,3	25,0	16	14	79,0	15,0	100/50		●	●	●	●	●	●	●	●	●	●	●	●	●
	16	2 A 14-M 16	11,3	26,0	18	16	83,0	17,0	100/50		●	●	●	●	●	●	●	●	●	●	●	●	●
95	10	2 A 19-M 10	13,5	25,0	11	10	76,5	10,5	75/25			●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 19-M 12	13,5	25,0	14	12	81,5	13,2	75/25			●	●	●	●	●	●	●	●	●	●	●	●
	14	2 A 19-M 14	13,5	25,0	16	14	85,5	15,0	75/25			●	●	●	●	●	●	●	●	●	●	●	●
	16	2 A 19-M 16	13,5	27,0	18	16	90,5	17,0	75/25			●	●	●	●	●	●	●	●	●	●	●	●
	20	2 A 19-M 20	13,5	29,5	22	20	97,5	21,0	75/25			●	●	●	●	●	●	●	●	●	●	●	●
120 125	10	2 A 24-M 10	15,2	28,5	11	10	82,0	10,5	50/25			●	●	●	●	●	●	●	●	●	●	●	●
	12	2 A 24-M 12	15,2	28,5	14	12	87,0	13,2	50/25			●	●	●	●	●	●	●	●	●	●	●	●
	14	2 A 24-M 14	15,2	28,5	16	14	91,0	15,0	50/25			●	●	●	●	●	●	●	●	●	●	●	●
	16	2 A 24-M 16	15,2	28,5	18	16	95,0	17,0	50/25			●	●	●	●	●	●	●	●	●	●	●	●
	20	2 A 24-M 20	15,2	30,0	22	20	103,0	21,0	50/25			●	●	●	●	●	●	●	●	●	●	●	●
150	10	2 A 30-M 10	16,7	31,5	13	11	92,0	10,5	50/25				●	●	●	●	●	●	●	●	●	●	●
	12	2 A 30-M 12	16,7	31,5	16	14	98,0	13,2	30/15				●	●	●	●	●	●	●	●	●	●	●
	14	2 A 30-M 14	16,7	31,5	18	16	102,0	15,0	30/15				●	●	●	●	●	●	●	●	●	●	●
	16	2 A 30-M 16	16,7	31,5	19	17	104,0	17,0	30/15				●	●	●	●	●	●	●	●	●	●	●
	20	2 A 30-M 20	16,7	31,5	22	20	110,0	21,0	30/15				●	●	●	●	●	●	●	●	●	●	●
185	12	2 A 37-M 12	19,2	35,5	16	14	108,0	13,2	30/15						●	●	●	●	●	●	●	●	●
	14	2 A 37-M 14	19,2	35,5	18	16	112,0	15,0	30/15						●	●	●	●	●	●	●	●	●
	16	2 A 37-M 16	19,2	35,5	19	17	114,0	17,0	30/15						●	●	●	●	●	●	●	●	●
	20	2 A 37-M 20	19,2	35,5	22	20	120,0	21,0	30/15						●	●	●	●	●	●	●	●	●
240	12	2 A 48-M 12	21,1	39,0	16	14	109,0	13,2	20/5												●	●	●
	14	2 A 48-M 14	21,1	39,0	18	16	113,0	15,0	20/5												●	●	●
	16	2 A 48-M 16	21,1	39,0	19	17	115,0	17,0	20/5												●	●	●
	20	2 A 48-M 20	21,1	39,0	22	20	121,0	21,0	25/5												●	●	●
300	12	2 A 60-M 12	23,7	44,0	20	14	129,5	13,2	20/5												●	●	●
	14	2 A 60-M 14	23,7	44,0	22	16	133,5	15,0	20/5												●	●	●
	16	2 A 60-M 16	23,7	44,0	22	19	136,5	17,0	20/5												●	●	●
	20	2 A 60-M 20	23,7	44,0	24	23	142,5	21,0	20/5												●	●	●
400	12	2 A 80-M 12	27,0	51,0	22	19	140,0	13,2	15/5												●	●	●
	14	2 A 80-M 14	27,0	51,0	22	19	140,0	15,0	10/5												●	●	●
	16	2 A 80-M 16	27,0	51,0	22	19	140,0	17,0	10/5												●	●	●
	20	2 A 80-M 20	27,0	51,0	24	23	146,0	21,0	15/5												●	●	●
500	16	2 A 100-M 16	30,3	56,5	22	19	147,0	17,0	10/5													●	●
	20	2 A 100-M 20	30,3	56,5	24	23	153,0	21,0	10/5													●	●
600÷630	16	2 A 120-M 16	33,4	61,5	22	19	159,0	17,0	20/5													●	●
	20	2 A 120-M 20	33,4	61,5	24	23	165,0	21,0	20/5													●	●
800	20	2 A 160-M 20	38,0	72,0	24	23	187,0	21,0	12/3														●
1000	20	2 A 200-M 20	44,0	80,0	24	23	202,0	21,0	6/2														●

2A-M series are made from high purity copper tube, and are annealed.
They feature a double length barrel for enhanced electrical and mechanical performance in heavy duty applications.
The absence of an inspection hole prevents the entry of water or moisture into the crimped joint making these terminals suitable for outdoor applications.
The terminals are electrolytically tin plated to prevent atmospheric corrosion.
2A-2M series terminals with double stud hole palm are available against specific requirements.