


HIGH VOLTAGE TERMINALS

two hole fixing



CA-2M 2A-2M

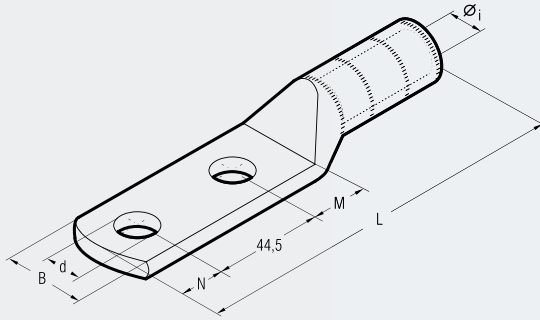

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm					Quantity Box/Bag	Hydraulic Tools			
			Øi	B	M	N	L		d			
25 R	8	CA 25-2 M 8	6,8	14,0	10	11	113,5	8,4	200/50	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
	12	CA 25-2 M 12	6,8	21,0	16	14	122,5	13,2	150/50			
30 RC/S ÷ 40 S	12	CA 40 S-2 M 12	8,2	21,5	16	14	123,5	13,2	100/50			
50 RC	12	CA 50 R-2 M 12	8,7	20,5	16	14	123,5	13,2	100/50			
50 S	12	CA 50 S-2 M 12	9,5	21,0	16	14	123,5	13,2	100/50			
63 S ÷ 70 S	12	CA 70 S-2 M 12	11,0	27,0	16	14	127,7	13,2	50/25			
80 S ÷ 95 RC	14	CA 95 R-2 M 14	12,0	28,0	18	16	139,5	15,0	30/15			
95 S ÷ 100 S	14	CA 95 S-2 M 14	13,5	29,0	18	16	139,5	15,0	30/15			
120 RC/S ÷ 150 RC	14	CA 150 R-2 M 14	15,0	31,0	18	16	145,5	15,0	30/15			
150 S ÷ 160 RC	14	CA 150 S-2 M 14	16,5	32,0	18	16	145,5	15,0	30/15			
160 S ÷ 200 RC	14	CA 200 R-2 M 14	17,0	32,5	18	16	145,0	15,0	30/15			
200 S ÷ 240 RC	14	CA 240 R-2 M 14	19,2	43,0	18	16	151,5	15,0	15/5			
240 S ÷ 315 RC	14	CA 315 R-2 M 14	21,5	43,0	18	16	149,5	15,0	20/5			
315 S	14	CA 315 S-2 M 14	23,7	44,0	18	16	149,5	15,0	20/5			
400 R	12	2 A 80-2 M 12	27,0	51,0	20	14	177,5	13,2	15/5	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
	14	2 A 80-2 M 14	27,0	51,0	22	16	181,5	15,0	15/5			
	16	2 A 80-2 M 16	27,0	51,0	22	19	184,5	17,0	15/5			
500 R	14	2 A 100-2 M 14	30,3	56,5	22	16	182,5	15,0	10/5	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
	16	2 A 100-2 M 16	30,3	56,5	22	19	185,5	17,0	10/5			
600 R ÷ 630 R	14	2 A 120-2 M 14	33,4	61,5	22	16	200,5	15,0	15/5	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
	16	2 A 120-2 M 16	33,4	61,5	22	19	202,5	17,0	15/5			

R = Round conductors RC = Round Compact conductors S = Sector shaped conductors


CA-2M and 2A-2M Copper Tube Terminal Lugs are designed for high voltage applications up to 33kV. Manufactured from high purity copper tube, annealed and tin-plated. The extended barrel enhances electrical and mechanical performance.

The absence of an inspection hole prevents moisture entry into the crimped joint.

Featuring an extended palm with two fixing holes at 44.5mm centres.

HIGH VOLTAGE TERMINALS

two hole fixing

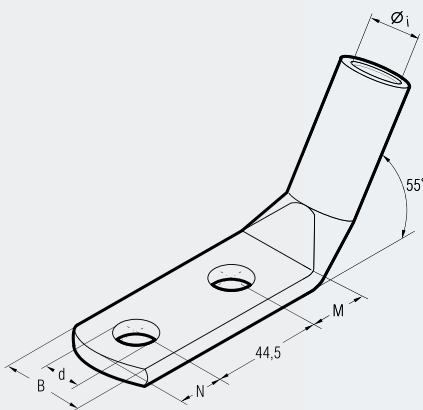

2A-2M/55°



Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm					Quantity Box/Bag	Hydraulic Tools		
			Øi	B	M	N	d				
400 R	14	2 A 80 - 2 M 14/55°	27,0	51,0	22	16	15	10/5	HT 120 and tools and heads with 130 kN crimping force	ECW-H3D	RHU 520
600 R ÷ 630 R	14	2 A 120 - 2 M 14/55°	33,4	61,5	22	16	15	15/3			

R = Round conductors

The 2A-2M/55° Copper Tube Terminal Lugs have the same characteristics as the CA-2M and 2A-2M ranges, with the additional feature of the palm bent at 55°.