





Bare Copper Tapes

Wallis high conductivity bare copper tape is used on both lightning protection and earthing applications. It is annealed for ease of use and has radiused edges.

All our standard bare copper tapes are marked 'Wallis U.K. - BS EN 13601'.

Size W x H mm	C.S.A. mm ²	Weight per Metre kg	Standard Coil Size m	Part Number
12.5 x 1.5	18.75	0.17	100	TC 121
12.5 x 3	37.5	0.33	100	TC 123
20 x 1.5	30	0.27	100	TC 201
20 x 3	60	0.53	100	TC 203
25 x 1.5	37.5	0.33	100	TC 251
25 x 3	75	0.67	25 & 50	TC 253
25 x 4	100	0.89	50	TC 254
25 x 6	150	1.33	40	TC 256
30 x 2	60	0.53	50	TC 302
30 x 3	90	0.80	50	TC 303
30 x 4	120	1.07	40	TC 304
30 x 5	150	1.33	40	TC 305
31 x 3	93	0.83	50	TC 313
31.5 x 4	126	1.13	40	TC 3154
31 x 6	186	1.65	30	TC 316
38 x 3	114	1.01	50	TC 383
38 x 5	190	1.69	30	TC 385
38 x 6	228	2.02	25	TC 386
40 x 3	120	1.06	40	TC 403
40 x 4	160	1.42	30	TC 404
40 x 5	200	1.78	25	TC 405
40 x 6	240	2.16	25	TC 406
40 x 6.3	252	2.24	25	TC 4063
50 x 3	150	1.33	40	TC 503
50 x 4	200	1.78	30	TC 504
50 x 5	250	2.22	20	TC 505
50 x 6	300	2.68	20	TC 506
50 x 6.3	315	2.80	20	TC 5063
50 x 8	400	3.60	15	TC 508

Material: Copper to BS EN 13601 (formerly BS 1432).

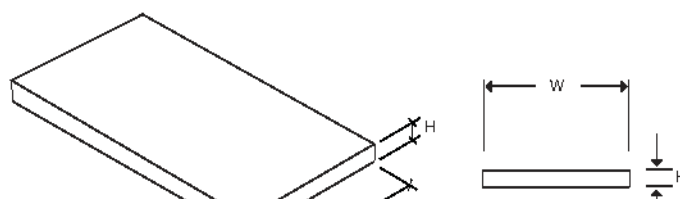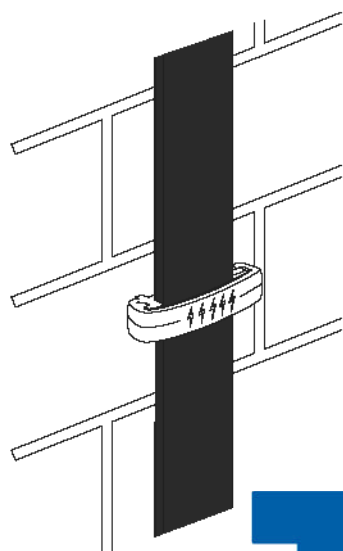

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582