


**FALL
SAFE**
We do it. You're safe!



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

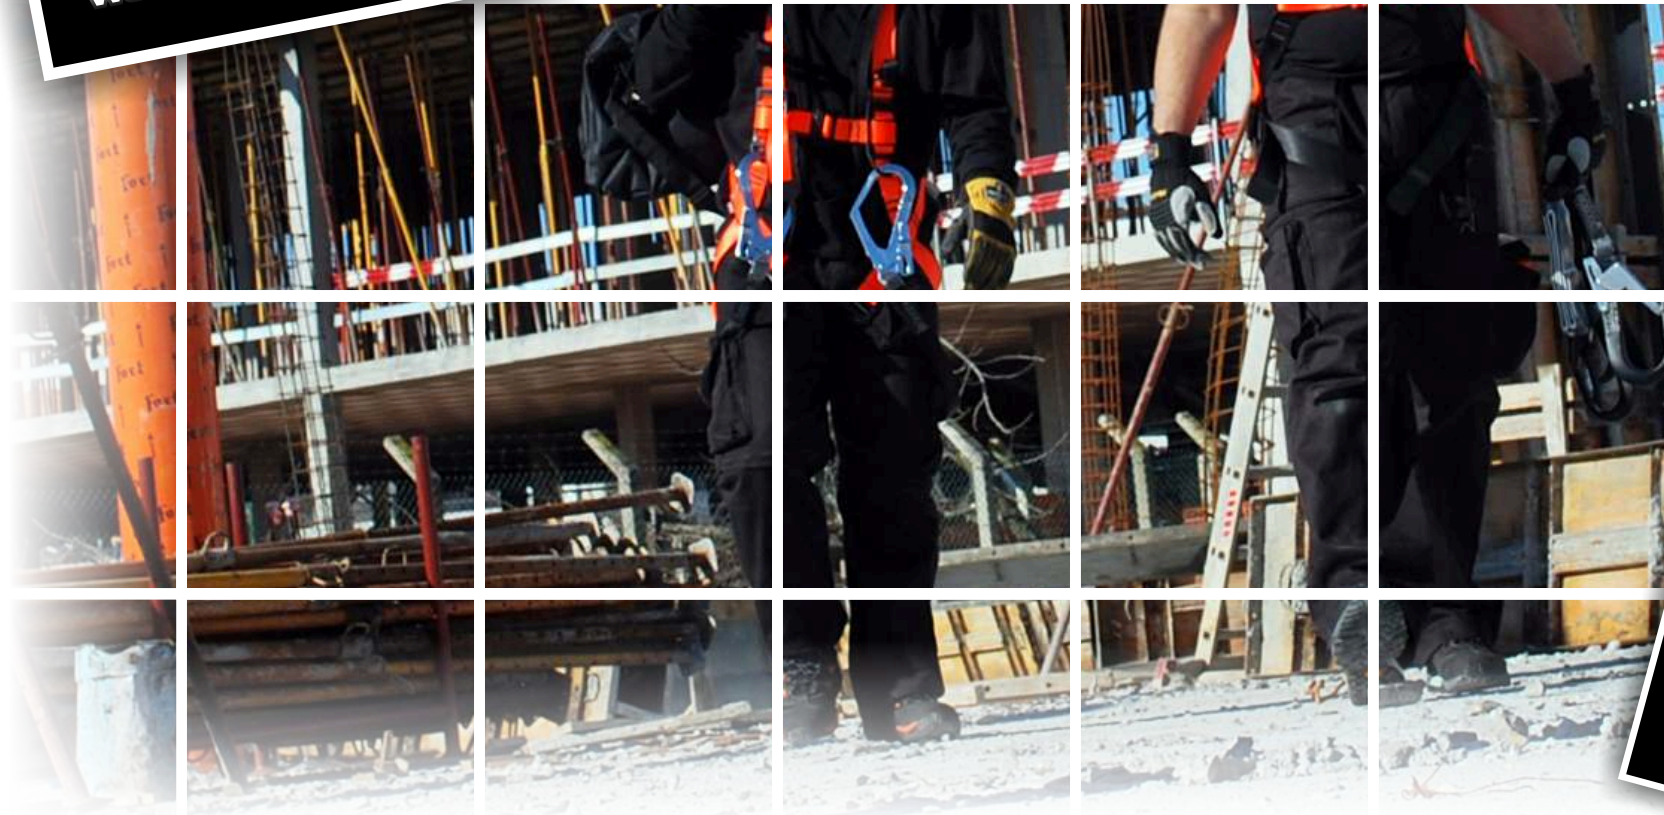

EKMAN™
SAFETY
BASIC



The Company

Fall Safe, with manufacturing facilities in Vila do Conde, Portugal gives great importance to product quality, innovation and excellent service.

Partnering with Universities and strategic technical partners, Fall Safe uses ergonomic principles in research, development and technology.

Investing in this innovation will continue to drive Fall Safe into the future.

Express Store

Please visit our Express Store web www.fallsafe-online.com/webs/express/en items displayed are delivered on the same day you place your order. Qualifying orders must be placed before 16H00 (GMT) and shipped to an eligible address. If the order is placed after the deadline, your order will be delivered the next business day.

If You are not a regular customer we will contact Your nearest distributor to provide You all necessary support, don't worry we don't let You down.

Quality

Fall Safe is an internationally certified company on the following standards:

Worldwide

- ISO 9001:2008
- Directive 89/686/EEC 11°B
- OHSAS 18001:2007

United States

- OSHA 1910, 1926
- ANSI 10.14, Z117.1, Z359
- ISO 9001:2008

Fall Safe relies on internal process control and 3rd party entities to insure products exceed the basic requirements of the Safety Industry Worldwide.



Testing

Testing in the Safety Industry is an International requirement. Fall Safe has invested in both internal and 3rd party testing to ensure all products exceed worldwide requirements and standards. From raw materials to finished products, Fall Safe's quality disciplines are world class to adhere to ISO requirements.



Life's a Rollercoaster...

Play Safe!



FALLSAFE WORK AT HEIGHTS TRAININGS

W@H Safety Auditors 32h

W@H Starting Level I 12h

W@H Basic Level II 16h

W@H Advance Level III 16h

Selection of fall protection equipment 16h

Minimum requirements for a formal fall protection safety management (the advanced level) 40h

Training of trainers - Work @ heights 21h

Also global safety training courses in accordance with your needs
Maintenance and Inspection by competent person 8

More info? Check our training catalog and/or visit our web at
www.fallsafe-online.com/webs/training

EKMANTM
S A F E T Y
BASIC



Ekman Basic Harnesses

These harnesses are designed for technical and intense everyday use. Designed to give the user highest safety, the Ekman Basic range offers a wide choice for every possible working environment. Ekman Basic harnesses have shown their quality performances by thousands of users along many years.

Ekman Basic Fall Arrest Lanyards

Ekman basic fall arrest lanyards were developed for durability in tough environments with a high safety factor.

They have a maximum length of 2m and incorporate energy absorbing strap to ensure optimum energy dissipation: maximum 6KN of protective force.



FS2000 Full Body Harness

1 Dorsal D-ring + 2 front loops for fall arrest systems attachment with steel karabiner
 2 side D-ring for work positioning
 Size adjustment at chest, waist and legs provides perfect fit
 Easy and fast to put on safety harness
 Standard buckles in high strength steel
 Built in 2 colors for easier orientation when putting on
 Comfortable and ergonomic backrest
 Sit support straps stays low and comfortable, takes up forces during a fall
 ECO version available (without karabiner)
 Universal size fits most



EN358 EN361

1.4 Kg



FS2001 Full Body Harness

1 Dorsal D-ring for fall arrest systems attachment
 Size adjustment at chest and legs provides perfect fit
 Easy and fast to put on safety harness
 Standard buckles in high strength steel
 Built in 2 colors for easier orientation when putting on
 Sit support strap stays low and comfortable, takes up forces during a fall

FS090 belt compatible
 Universal size fits most



EN361

0.8 Kg



FS2002 Full Body Harness

1 Dorsal D-ring and 2 front loops with steel karabiner for fall arrest systems attachment
 Size adjustment at chest and legs provides perfect fit
 Easy and fast to put on safety harness
 Standard buckles in high strength steel
 Built in 2 colors for easier orientation when putting on
 Support strap stays low and comfortable, takes up forces during a fall
 ECO version available (without karabiner)
 FS090 belt compatible
 Universal size fits most



EN361

0.9 Kg





FS2003 Full Body Harness

1 Dorsal D-ring for fall arrest systems attachment
 2m adjustable lanyard with energy absorber and steel karabiner
 in accordance to EN363 with screw lock closing
 Size adjustment at chest and legs provides optimum fit
 Easy and fast to put on safety harness
 Standard buckles in high strength steel
 Built in 2 colors for easier orientation when putting on
 Support strap stays low and comfortable, takes up forces during a fall
 Universal size fits most
 FS090 belt compatible



EN355 EN361

1.4 Kg



FS2007 Full Body Harness

1 Dorsal D-ring with extension strop for easier connection and
 2 front loops for fall arrest systems attachment with steel karabiner
 Size adjustment at chest, shoulders, waist and legs
 provides optimum fit
 2 side D-ring for work positioning
 Built in 2 colors for easier orientation when putting on
 Support strap stays low and comfortable, takes up forces during a fall
 Standard buckles in high strength steel
 Comfortable backrest
 Universal size fits most
 ECO version available (without karabiner)



EN358 EN361

1.5 Kg



FS2008 Full Body Harness

1 Dorsal D-ring and 2 front loops for fall arrest systems attachment with steel karabiner
 Size adjustment at chest, shoulders and legs provides optimum fit
 Easy and fast to put on safety harness
 Standard buckles in high strength steel
 Built in 2 colors for easier orientation when putting on
 Support strap stays low and comfortable, takes up forces during a fall
 FS090 belt compatible
 Universal size fits most
 ECO version available (without karabiner)



EN361

1 Kg





FS2010 Full Body Harness

1 dorsal D-ring for fall arrest systems attachment
 1 front D-ring for fall arrest systems attachment
 2 side D-ring for work positioning
 1 ventral D-ring for work suspension
 Backrest ultra 12mm thick for optimum comfort
 Harness built in 2 colors for easier orientation when putting on
 Size adjustment at chest/shoulders, waist and legs provides optimum fit
 Rings for suspension tools
 Legs pad wide and comfortable support standard buckles in high strength steel
 Size: S/M L/XL



EN358 EN361
EN813

2.0 Kg



FS2011 Full Body Harness

1 dorsal D-ring for fall arrest systems attachment
 1 ventral D-ring for work suspension
 2 side D-ring for work positioning
 Harness built in 2 colors for easier orientation when putting on
 Rings for suspension tools
 Size adjustment at chest/shoulders, waist and legs provides optimum fit
 Backrest ultra 12mm thick for optimum comfort
 Legs pad wide and comfortable support standard buckles in high strength steel
 Size: S/M L/XL



EN358 EN361
EN813

2.2 Kg



FS2012 Full Body Harness

1 dorsal D-ring and 2 loops for fall arrest systems attachment with steel karabiner.
 2 side D-rings for work positioning with rotatable function
 Size adjustment shoulders, waist and legs provides user perfect fit
 Backrest ultra 12mm thick for optimum comfort
 Standard buckles in high strength steel
 Rings for tool bags
 Size: S/M L/XL



EN358 EN361

1.9 Kg



Product description


Standards

Length

TUNING UP

Choose what hooks and karabiners you want!

See the example »

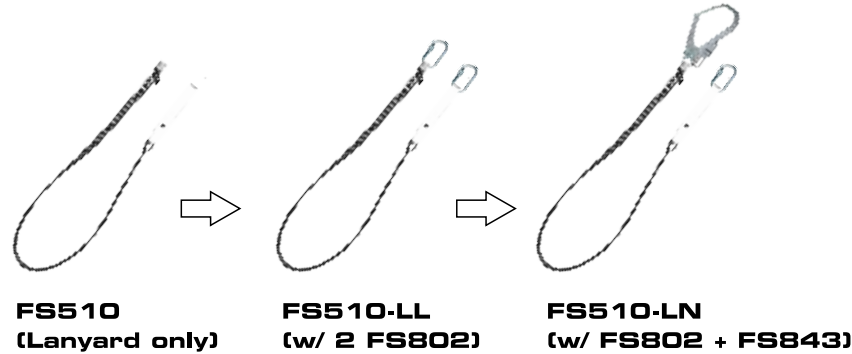

Karabiner Hook

**FS802
FS825
FS843**

Add Ref.

**L
M
N**



FS510 Lanyard with energy absorber

25mm polyester webbing lanyard
Rip stitch energy absorber

TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1, 1.5 or 2 m



FS516 Lanyard Double with energy absorber

25mm polyester webbing lanyard
Rip stitch energy absorber

TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1, 1.5 or 2 m



FS519 Lanyard with energy absorber

11mm nylon kernmantel rope
Rip stitch energy absorber
Safety stitch beneath protective sleeve

TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1, 1.5 or 2 m



Product description

Standards

Length



FS550 Lanyard Double with energy absorber

11mm nylon kernmantel rope
Rip stitch energy absorber
Safety stitch beneath protective sleeve
TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1, 1.5 or 2 m



FS543 Adjustable Lanyard with energy absorber

25mm polyester webbing
Rip stitch energy absorber
Length adjustable device integrated
TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1.5 - 2 m



FS544 Adjustable Lanyard with energy absorber

11mm nylon kernmantel rope
Rip stitch energy absorber
Length adjustable device integrated
TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN355

1.5 - 2 m



Product description

Standards

Length



FS032 Lanyard

25mm polyester webbing
TUNING UP - Choose what hooks and Karabiners you want!



EN354

1, 1.5 or 2 m



FS038 Double Lanyard

25mm polyester webbing
TUNING UP - Choose what hooks and Karabiners you want!



EN354

1, 1.5 or 2 m



FS082 Lanyard

11mm nylon kernmantal rope
TUNING UP - Choose what hooks and Karabiners you want!



EN354

1, 1.5 or 2 m



FS087 Double Lanyard

11mm nylon kernmantal rope
TUNING UP - Choose what hooks and Karabiners you want!



EN354

1, 1.5 or 2 m



FS503 Energy absorber

2 quick links screw lock
 Reduces forces below 6KN during a fall
 Use with lanyards without Energy absorber



EN354 EN355

0.4 m



Product description

Standards

Length



FS030 Adjustable lanyard

11mm nylon kernmantal rope
TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN358

1.3 - 2 m



FS031 Adjustable lanyard

25mm polyester webbing
TUNING UP - Choose what hooks and Karabiners you want!



EN354 EN358

1.3 - 2 m



FS052K Work Positioning Lanyard

1 snap hook (FS825)
1 karabiner (FS802) in steel
Rope specially designed for exigent works
Length adjustment in stainless steel to avoid corrosion
40mm Tubular web hi-resistant polyester for increased lifetime
Rope breaking strength >26KN
Stitches with high strength polyester thread No. 10 >180N



EN358

2, 3 or 4 m



FS052H Work Positioning Lanyard

1 snap hook (FS825)
1 karabiner (FS802) in steel



EN358

2, 3 or 4 m



Product description

Standards

Weight



FS802 Karabiner

Zinc-plated Steel
Strength 23KN
Opening 20mm
Screw locking closure



EN362

160 g



FS825 Snap Hook

Zinc-plated Steel
Strength 23KN
Opening 20mm
Auto-lock closure



EN362

210 g



FS843 Large Pipe Hook

Zinc-plated steel
Strength 22KN
Opening 60mm
Auto-lock closure



EN362

560 g



FS701 Anchor point

Galvanized or stainless steel
Strength 15kN
Easy to install
Permanent fall arrest point



EN795-A

800 g





FS800 Anchor Sling

Heavy duty 25mm polyester webbing strap
Strength 20kN



EN795 class B

1 m / 0.2 kg
2 m / 0.3 kg
3 m / 0.4 kg
4 m / 0.5 kg



FS801 Anchor Strap

Heavy duty 45mm polyester webbing strap
D-ring connector
Strength 22kN



EN795 class B

1 m / 0.30 kg
2 m / 0.38 kg
3 m / 0.46 kg
4 m / 0.54 Kg



FS803 Anchor Wire

Galvanized steel 10mm with plastic proactive
Karabiner FS802 included
2 eyelets
Strength 30kN



EN795 class B

1 m / 0.5 kg
2 m / 1.0 kg
3 m / 1.5 kg
4 m / 2.0 kg



FS804 Lifeline Safewalk

Portable HLL System
Up to 2 person use
Secures side movements
Available Standard version



EN795 class B

10 or 20 m





FS8205 Rucksack

20L Capacity

500 g



FS3000 Helmet

Industrial safety helmet
 Plastic and polyester cradle and rubber chinstrap
 Fits a range of sizes from 53 to 66 cm
 Available in White, yellow, orange, red and blue
 Pin or screw lock
 ABS Shell material
 Nylon tape suspension
 LPDE headband
 Nylon harness slot
 Elastic chin strap
 Nylon chin strap hook



EN397:1995

310 g

FS3000-HSET-01
Ears protection



FS3000-SI-2
Display Protection



FS3000-VIS-01
Display Protection





FS660 Anchor line 14mm

Vertical anchor rope with combined energy absorber
Stainless steel fall arrest slider
Iron karabiners
Strength 22KN
ISO1140 14mm rope
45mm polyester webbing supports > 25KN
2 double action screw lock karabiners
Iron quick link

CE

EN353-2

15 m / 2.7 kg
20 m / 3.2 kg
25 m / 3.7 kg



FS670 Anchor line 10mm

Vertical anchor rope with combined energy absorber
Stainless steel fall arrest slider
Iron karabiners
Strength 22KN
11mm Kernmantel rope
45mm polyester webbing supports > 25KN
2 double action screw lock karabiners
Iron quick link

CE

EN353-2

10 m / 2.0 kg
15 m / 2.4 kg
20 m / 2.9 kg
25 m / 3.3 kg
50 m / 5.6 kg





FS700 Fall arrester 2,25m Mini

45mm Polyester webbing
Energy absorber



EN360

2.25 m / 1.2 Kg



FS933 Retractable Fall arrest block

Plastic housing
Steel snap hook breaking strength 25KN
4.5mm Galvanized steel wire
Casing made up of high impact strength polymer, to prevent breakage and is nearly indestructible
Easier to install with top swivel and snap hook included to prevent lifeline from twisting during use
Resistant to damp, heat, cold, corrosion



EN360

7.5 m / 4.1 Kg



FS934 Retractable Fall arrest block

FS935
FS936

Connect karabiner to the anchor point
Plastic housing
4.5mm Galvanized steel wire
Steel snap hook breaking strength 25KN
Connect hook to the dorsal D-ring of the harness



EN360

FS934 - 10 m
FS935 - 12 m
FS936 - 15 m

Resistant to damp, heat, cold, corrosion
Easier to install with top swivel and snap hook included to prevent lifeline from twisting during use
Casing made up of high impact strength polymer, to prevent breakage and is nearly indestructible





FALLSAFE-ONLINE, LDA

Zona Industrial da Varziela, Rua B - Lote 54
 4480-620 Vila do Conde
 PORTUGAL, EU

www.fallsafe-online.com

T. +351 252 480 060
 F. +351 252 480 069
 E. support@fallsafe-online.com



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

