


# Heritage Range

## Hy-Cast 407 Cast Iron Service pillars



The classic robust Lucy Lighting cast iron pillar range has been designed for increased weather protection, security and very long life. Available in a variety of sizes, locking arrangements and colours, the Heritage range can be supplied with wooden backboard and interlocks to customer's specification. Two heights of cast iron service pillars are available within this range - Highline and Lowline with a common width and depth.

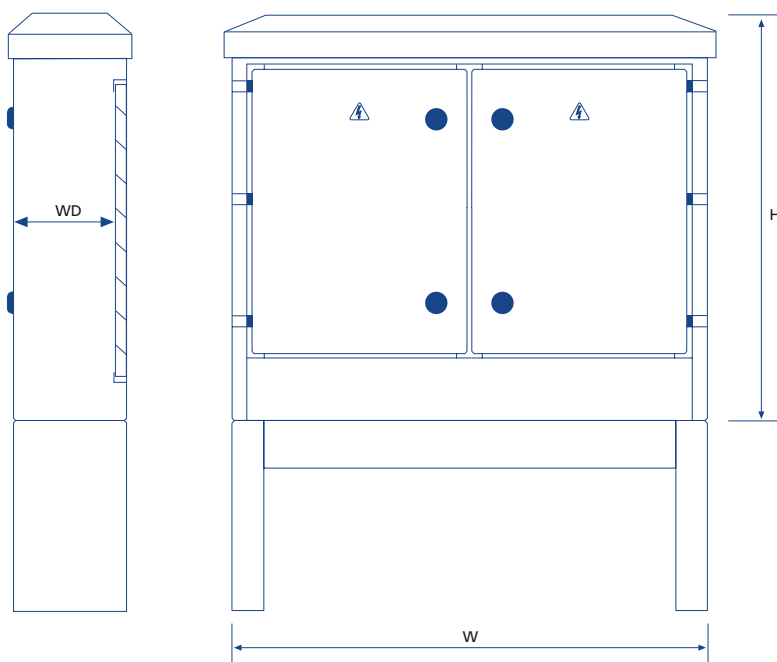

### Dimensions (mm)


Pillar size code	22	30	38	42	46	54	58	66	70
A Width of Pillar Roof	632	835	1045	1146	1248	1452	1553	1756	1858
B Ground Fixing Centres (Bolt on root only)	273	476	686	787	889	1092	1194	1397	1498
C Ground Fixing Centres (Shell only)	521	724	934	1035	1137	1340	1442	1645	1746
D Min. distances required to open door	435	486	452	503	554	655	706	808	895
E Internal Width	559	762	972	1073	1175	1378	1480	1683	1784
Backboard Width	483	686	896	997	1099	1302	1404	1607	1708

Approx. Empty Weight (Kg)	22	30	38	42	46	54	58	66	70
Highline	240	280	315	332	360	398	415	440	460
Lowline	203	241	279	292	318	343	368	394	406

### Note

1. Highline & Lowline dimensions A to D are common.
2. Pillar sizes 22 & 30 single door hinged from left hand side.
3. Internal working depth (WD) from backboard = 353mm. (461mm external depth)
4. Backboard height: Highline = 1185mm Lowline = 880mm.

### The ordering code consists of 3 sections

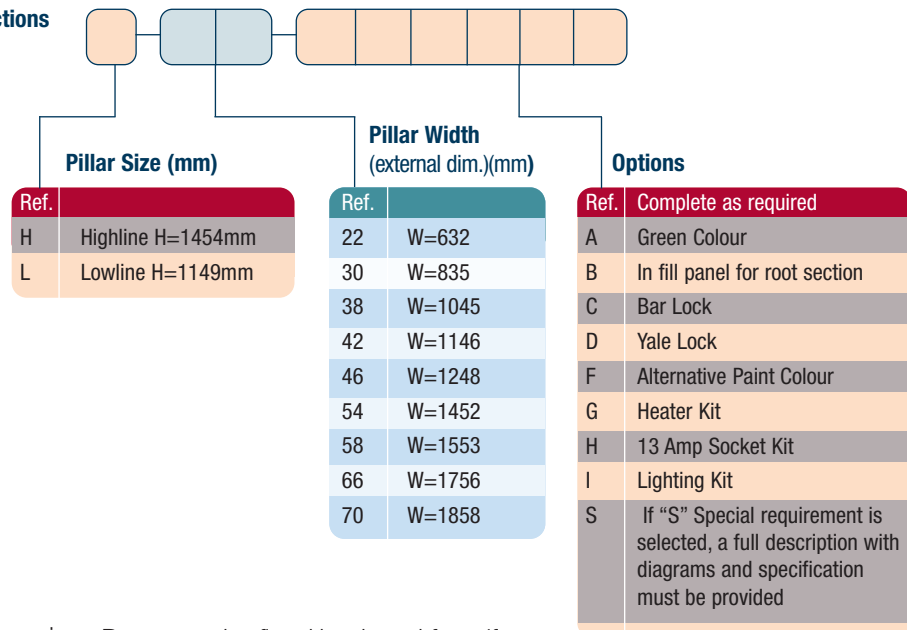

### Specification

Pillar cap and sides cast in close grain grey iron to BS 1452: grade 180

All pillar components receive a special proprietary zinc phosphate resin treatment followed by a final coat of polyurethane paint in dark admiralty grey or hollybush green

IP3L3 degree of protection to IEC 947-1 standard

Doors and back panels are fabricated from 4mm special chrome enriched steel

Sets of zinc pre-coated steel in-fill panels available for fitting to root when mounted above ground

Doors can be fitted back and front if required with a centre mounted backboard offering dual entry/security i.e. for R.E.C. and local authority access

A backboard of 15mm marine ply is supplied as standard with each pillar

Two wedge locks with security covers fitted as standard

Doors are fitted with latching stays for safety but may be removed from their hinges if required

Concealed ventilation to prevent condensation via the Lucy original vented cap design

### Options

Option of in-fill /apron plate available  
Yale lock and Bar Lock

Other high performance finishes to relevant BS standards and suitable for hostile environments are available

Options of interior light, heater & thermostat available

Electrical interior fit out service to your design including factory test certificate

G2A Highways paint specification



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, OUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS  
FURSE EARTHING  
www.cablejoints.co.uk  
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371  
Tel 0044 117 977 4647 Fax 0044 117 977582

