

BBIT
Heat-shrinkable busbar insulation tubing
Voltage class 36 kV
Application Ø 11 – 125 mm

Product description

BBIT is a thick wall, heat-shrinkable tubing which provides insulation enhancement and protection against flashover and accidentally induced discharge. Particularly useful in confined spaces, BBIT tubing can be used on both circular and rectangular copper or aluminium busbars. On application of heat the tubing shrinks snugly over the busbar profile ensuring that the required minimum wall thickness is obtained. BBIT tubing can be installed easily during large scale production using an oven or in the field using a gas torch or hot air. BBIT tubing is manufactured from a non-halogen based polymer which has excellent performance in high voltage environments and reduces the noxious and corrosive effects in fire situations.

Applications

The use of BBIT tubing allows equipment designers the freedom to reduce air spacing between busbars, such as in the manufacture of switch-gear cabinets where space is at a premium. BBIT tubing provides flashover protection up to 36 kV.

Clearance reduction

The table below indicates the clearance reductions which are possible using BBIT tubing. These are derived from BIL, AC withstand, DC withstand and discharge extinction tests. These clearances should not be adopted without testing by the user. Sharp electrodes and unusual geometries may require wider clearances.

| Rated voltage (kV) | Phase-phase (mm) | Phase-ground (mm) | IEC 71-2 air clearance (mm) |
|----------------------------|------------------|-------------------|-----------------------------|
| Round busbars | | | |
| 12 | 30 | 40 | 120 |
| 17.5 | 45 | 60 | 160 |
| 24 | 60 | 90 | 220 |
| 36 | 100 | 160 | 320 |
| Rectangular busbars | | | |
| 12 | 35 | 45 | 120 |
| 17.5 | 55 | 65 | 160 |
| 24 | 70 | 100 | 220 |
| 36 | 140 | 190 | 320 |



Features/benefits

- Compatible with all other products in the Raychem MV insulation enhancement system
- Excellent flexibility means BBIT can be installed on a wide range of curved or bent busbars without cracking or creasing
- High shrink ratio reduces inventory and simplifies product selection
- Exceptional insulation and long term reliability even at high continuous operating temperatures
- Extremely durable, resists damage from solvents, ultraviolet light, weathering, mechanical impact and general wear and tear
- Suitable for indoor and outdoor use
- Excellent anti-tracking properties
- Good thermal emissivity and contact with busbars means no derating is required
- Flame retardant and non-halogen based material reduces flammability and the toxic and corrosive effects in fire situations
- Can be stored indefinitely at temperatures up to 50°C without loss of performance
- Over 25 years of successful operating experience

BBIT


Heat-shrinkable busbar insulation tubing

| Key product specifications | Test method | Requirement |
|---|---------------------------|---|
| Thermal endurance | IEC 216 | 105°C min. |
| Accelerated ageing - Tensile strength - Ultimate elongation | ISO 188, ASTM D2671 | 168 hrs @ 120°C 10 MPa min. 300% min. |
| Comparative tracking index | IEC 112, VDE 0303/1 | KA 3c |
| Dielectric strength | ASTM D149, IEC 243 | 180 kV/cm min. @ 2 mm 150 kV/cm min. @ 2.5 mm 120 kV/cm min. @ 3 mm |
| Smoke index | NES 711 | Less than 120 |
| Acid gas generation | Raychem PPS 3010 4.23 | Less than 1% by weight |
| Low temperature flexibility | ASTM D2671 Procedure C | No cracking after 4 hrs @ -40°C |

Note: For further product specification information see Raychem PPS 3010/04.

Product selection


BBIT should normally be used on the following busbar sizes

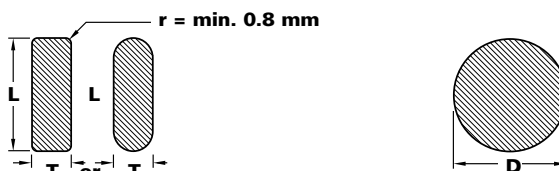

Product size

| | Rectangular bars, L + T (mm) | | Round bars, D (mm) | |
|-------------|------------------------------|------|--------------------|------|
| | min. | max. | min. | max. |
| BBIT 25/10 | 17 | 28 | 11 | 20 |
| BBIT 40/16 | 28 | 45 | 18 | 32 |
| BBIT 65/25 | 44 | 69 | 28 | 47 |
| BBIT 100/40 | 69 | 102 | 44 | 72 |
| BBIT 150/60 | 102 | 148 | 65 | 105 |
| BBIT 175/80 | 133 | 196 | 85 | 125 |

Ordering information

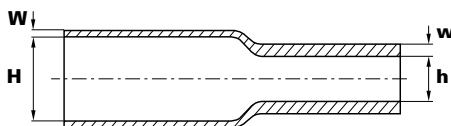

Ordering description

| Ordering description | Inside diameter (mm) | | Wall thickness (mm) | | UOM: m spool length |
|----------------------|----------------------|--------|---------------------|--------|------------------------|
| | H min. | h max. | W nom. | w min. | |
| BBIT 25/10-A/U | 25 | 10 | 1.6 | 3.6 | 25 |
| BBIT 40/16-A/U | 40 | 16 | 1.6 | 3.6 | 20 |
| BBIT 65/25-A/U | 65 | 25 | 1.6 | 3.6 | 15 |
| BBIT 100/40-A/U | 100 | 40 | 1.6 | 3.6 | 15 |
| BBIT 150/60-A/U | 150 | 60 | 1.6 | 3.6 | 15 |
| BBIT 175/80-A/U | 175 | 80 | 1.6 | 3.6 | 10 |

Note: Dimensions in mm unless otherwise stated. W, H = as supplied, w, h = after free recovery. Maximum longitudinal change after free recovery: ±5%. Maximum eccentricity: 35% (as supplied), 15% (after free recovery). Fit the larger size of BBIT if two sizes fit the required application. Installation instructions EPP 0618 5/96 and Material Safety Data Sheet available on request.

Technical reports

- UVR 8136 – (PPR 513) Performance report on busbar insulation for round busbars
- UVR 8137 – (PPR 537) Performance report on busbar insulation for rectangular busbars
- UVR 8003 – Supplementary qualification of BBIT
- UVR 8130 – Resistance of BBIT, MWTM and RNF 100 to 10% HF solution, surface resistance and other tests
- UVR 8091 – Production-scale installation of BBIT/BPTM
- UVR 8194 – Long term weathering and thermal ageing of BBIT and BPTM tubing

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale. ALR, AMP, AXICOM, B&H, BOWTHORPE EMP, CROMPTON INSTRUMENTS, DORMAN SMITH, DULMISON, GURO, HELLSTERN, LA PRAIRIE, MORLYNN, RAYCHEM, and SIMEL are trademarks.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK