

tyco


Electronics



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

MWTM

Heat-shrinkable medium wall insulating tubing

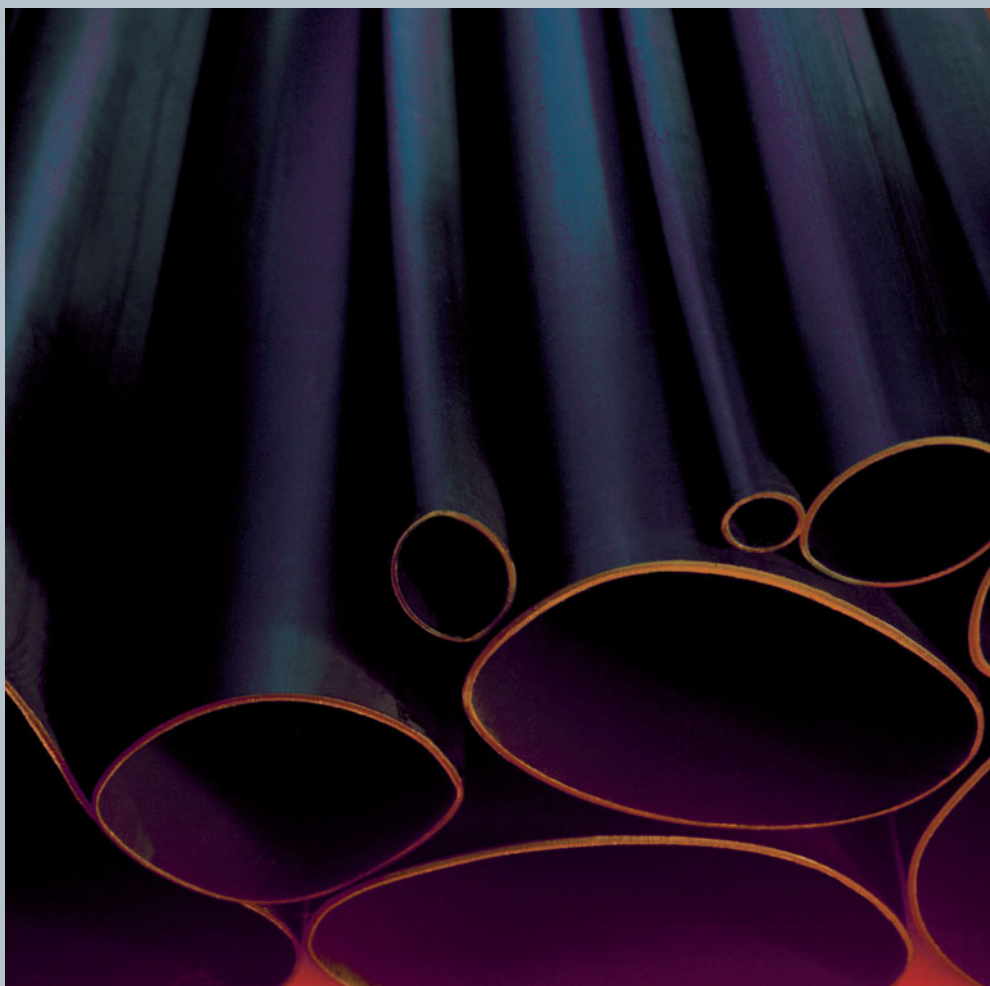

Raychem

Insulating and sealing systems for power cables have to perform to a range of exacting requirements; to be unaffected by years of weathering and ultra-violet light, to stand up to continuous temperature changes, to keep out moisture and corrosive liquids for a generation, to be immune to oils and solvents, and to combine lasting insulating properties with low weight, toughness, impact strength and flexibility.

The need for modern standards of efficiency and simplicity of installation is a further significant consideration.

To meet these demands, we developed MWTM, a heat-shrinkable medium-wall tubing now in widespread use in terminations, joints and cable repairs throughout the world. Heating with a commonly available gas torch activates the tubing's "elastic memory" causing it to recover in diameter. The tubing's high shrink ratio enables it to shrink and tightly fit a wide range of cable sizes and accessories.

Appropriate to the particular application, MWTM tubing is available with an inner sealant wall, which melts and flows under the heat and shrinking action of installation. This makes it suitable for either cable oversheath replacement and sealing, or uncoated as an insulating material. The shelf-life restrictions usually associated with tapes and resins do not apply, and the completed installation may be taken into service at once.

MWTM tubing is fast and easily installed, and has proven its long term reliability in harsh climatic conditions and polluted environments. It is one result of our capability in materials science and electrical power engineering, gained through extensive experience as one of the world's largest cable accessory makers and a sustained research effort. We make a wide range of specially developed products and support them with technical service and world-wide experience to meet the demands of the growing world of energy.


*An electrical system in Austria.
MWTM protects and seals the cable
cores and connectors as part of a
Raychem termination, and seals the
cable feedthrough into a building.*



Material properties		Test method	Material requirements
Tensile strength		ISO 37	14 MPa min.
Ultimate elongation		ISO 37	350 % min.
Density		ISO 1138 Method A	1.0 – 1.2 g/cm ³
Hardness		ISO 868	50 – 70 shore D
Accelerated ageing	7 days at 150°C ± 2°C	ISO 188	
	Tensile strength	ISO 37	14 MPa min.
	Ultimate elongation	ISO 37	300 % min.
Thermal endurance*		IEC 60216	120°C min.
Low temperature flexibility	4 hrs at -40°C ± 3°C	ASTM D 2671 Procedure C	No cracking
Dielectric strength	1 mm wall	IEC 60243	200 kV/cm
Volume resistivity		IEC 60093	1 x 10 ¹² Ω cm min.
Water absorption		ISO 62 Method 1	0.25 % max after 14 days at 23°C ± 2°C
Resistance to liquids	7 days in transformer oil VDE 0370 at 23°C ± 2°C	ISO 1817	
	Tensile strength	ISO 37	14 MPa min.
	Ultimate elongation	ISO 37	300 % min.
Weathering		The material from which MWTM is manufactured contains carbon black to protect it from ultra-violet light.	
Additional properties		More detailed product specification data available on request.	

* based on ultimate elongation

Dimensions

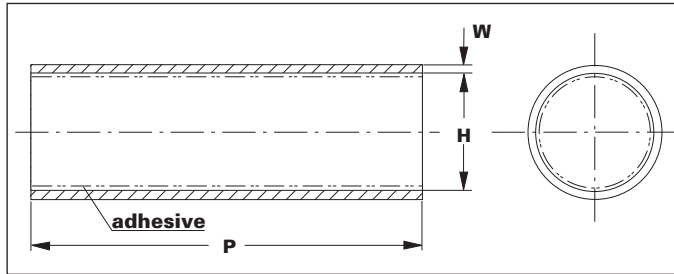

Notes:

- 1. Dimensions in millimeters
a = as supplied
b = after free recovery
- 2. Max. longitudinal change after free recovery:
+5 % to -15 % up to 35/12
+5 % to -10 % above 35/12

Raychem MWTM tubing is supplied complete with installation instructions.

Product/size*	Application range (diameter)	H		W		P
		a min	b max	a min	b min	
MWTM 10/3	3.5 – 9.0	10	3	0.3	1.0	See standard lengths
MWTM 12/3	3.5 – 10.8	12	3	0.3	2.0	
MWTM 16/5	5.5 – 14.5	16	5	0.3	1.4	
MWTM 25/8	9.0 – 22.5	25	8	0.4	2.0	
MWTM 35/12	13.0 – 31.5	35	12	0.4	2.0	
MWTM 50/16	17.5 – 45.0	50	16	0.5	2.0	
MWTM 63/19	21.0 – 57.0	63	19	0.6	2.4	
MWTM 70/26	23.5 – 63.0	70	26	0.5	2.0	
MWTM 75/22	24.0 – 68.0	75	22	0.6	2.7	
MWTM 85/25	27.5 – 77.0	85	25	0.6	2.8	
MWTM 95/29	32.0 – 86.0	95	29	0.7	3.1	
MWTM 115/34	37.0 – 104.0	115	34	0.7	3.1	
MWTM 140/42	46.0 – 126.0	140	42	0.7	3.1	
MWTM 160/50	55.0 – 144.0	160	50	0.7	3.2	
MWTM 180/60	66.0 – 162.0	180	60	0.7	3.2	

*Other sizes on request.

Standard lengths and coatings

Lengths

All sizes types are available in the standard lengths: 1000 mm and 1500 mm.

Spools and other lengths on request. All lengths subject to standard cutting tolerances.

Coatings

Adhesive type /S

MWTM tubing is available with or without an inner adhesive wall. The adhesive exhibits excellent bonding and sealing characteristics to all materials commonly used in the various cable insulation and sheath constructions, such as plastic, rubber, lead and aluminium.

Ordering example

Part number

MWTM 25/8-1000/S

Product type _____

Size _____

Standard length _____

/S = adhesive _____

/U = without adhesive _____

All of the above information, including drawings, illustrations and graphic designs, reflects our present understanding and is to the best of our knowledge and belief correct and reliable. Users, however, should independently evaluate the suitability of each product for the desired application. Under no circumstances does this constitute an assurance of any particular quality or performance. Such an assurance is only provided in the context of our product specifications or explicit contractual arrangements. Our liability for these products is set forth in our standard terms and conditions of sale. ALR, AMP, AXICOM, B&H, BOWTHORPE EMP, CROMPTON INSTRUMENTS, DORMAN SMITH, DULMISON, GURO, HELLSTERN, LA PRAIRIE, MORLYNN, RAYCHEM, and SIMEL are trademarks.



Energy Division – a pioneer in the development of economical solutions for the electrical power industry. Our product range includes: Cable accessories, connectors & fittings, electrical equipment, instruments, lighting controls, insulators & insulation enhancement and surge arresters.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK