

Euromold

a Nexans company



Medium voltage separable
connectors and bushings
- Interface F -

Catalogue 2015



EUROMOLD

Euromold is the leading European specialised designer, manufacturer and distributor of prefabricated cable accessories for medium voltage energy distribution. Euromold provides a complete range of accessories for underground cables: premoulded EPDM rubber connectors for cables and epoxy bushings for transformers and switchgear, as well as a large range of cold-shrinkable terminations and joints from 12 to 42 kV. Euromold is also the manufacturer of electrical components for the high voltage accessories of the Nexans group.

ISO 9001 Certificate

Since 1992, Euromold's commitment to quality is demonstrated by its ISO 9001 certification.

International standards

All our products meet the International standards like CENELEC HD 629.1, CENELEC EN 50180, IEC 60137, IEC 60502-4... or country specifications. Official certificates, CESI, KEMA, ATEX... prove the conformity of our products. Long duration tests of existing or new products are continuously performed in our test fields.

Laboratory accreditation

Since June 2000, Euromold's independent ELAB laboratory obtained the BELAC accreditation no.144-TEST conform with the European standards for laboratories ISO 17025 for electrical testing of low and medium voltage cable accessories according to the international standards EN 50393, IEC 60502-4, IEC 61442 and HD 629.

While every care is taken to ensure that the information contained in this publication is correct, no legal responsibility can be accepted for any inaccuracy. Nexans Network Solutions N.V. - Div. Euromold reserves the right to alter or modify the characteristics of its products described in this catalogue as standards and technology evolve.

SEPARABLE CONNECTORS AND BUSHINGS INTERFACE F


Table of contents

909TB - tee connector
909PB - coupling connector
944TB - tee connector
900AR-1 - equipment bushing
900AR-2 - equipment bushing
900AR-3 - equipment bushing
900AR-4 - equipment bushing
Accessories
Possible arrangements

Interface F1, F2 & F3

Dimensions according to
European CENELEC EN 50180
and 50181 (in mm).

Interface type	Voltage U_m (kV)	Current I_r (A)	Dia. D (mm)
F1	36	2500	50
F2	52	630	22 min
F3	52	1250	32

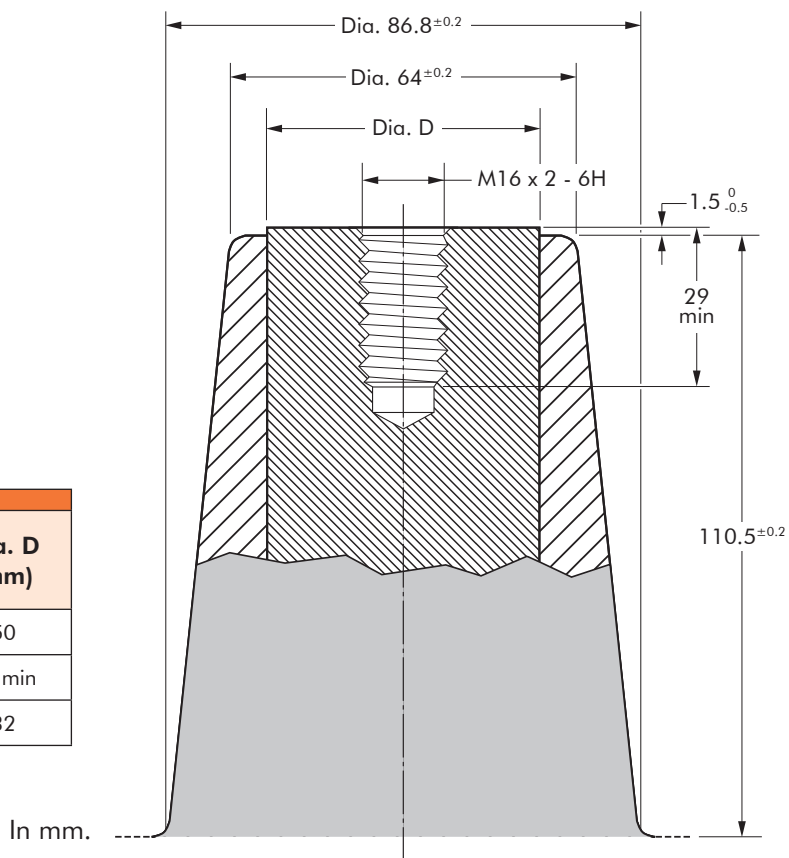

(K)(M)(P)909TB INTERFACE F TEE CONNECTOR

**Up to 42 kV
2500 A**

6/10	(12)	kV
6.35/11	(12)	kV
8.7/15	(17.5)	kV
12/20	(24)	kV
12.7/22	(24)	kV
18/30	(36)	kV
19/33	(36)	kV
20.8/36	(42)	kV

Application

Separable tee shape connector (bolted type) designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors, ...).

Also connects cable to cable when using the appropriate mating parts.

Technical characteristics


- The thick conductive EPDM jacket provides a total safe to touch screen which ensures safety for personnel.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

Design

Separable connector comprising:

- Conductive EPDM insert.
- Conductive EPDM jacket.
- Insulating EPDM layer moulded between the insert and the jacket.
- Type F - interface, as described by CENELEC EN 50180 and 50181.
- Conductor contact.
- Basic insulating plug.
- Cable reducer.
- Conductive rubber cap.
- Stud+nut+washer.
- Earthing lead.

The screen break design enables cable outer sheath testing without removing or dismantling the connector.

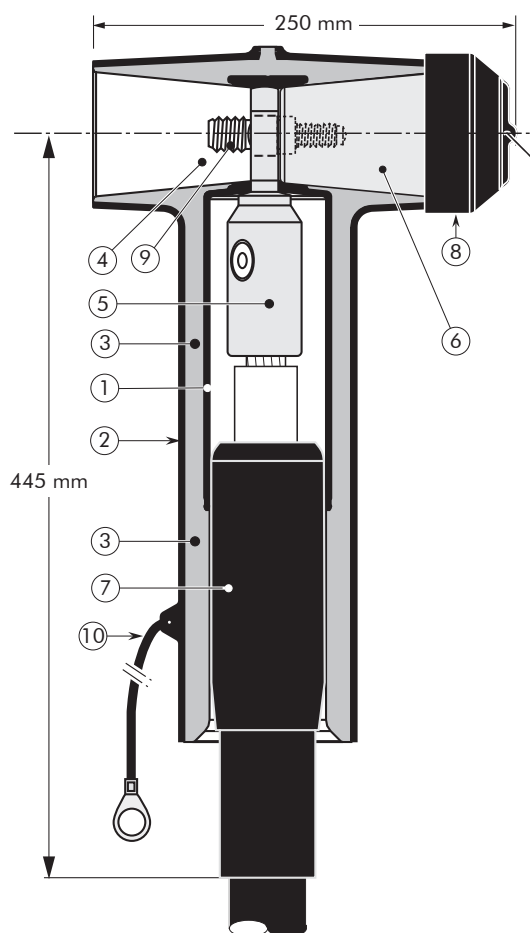

Specifications and standards

The 909TB separable connector meets the requirements of CENELEC HD 629.1.


Separable connector type	Voltage U_m (kV)	Current I_r (A)	Conductor sizes (mm ²)	
			min	max
909TB/G	12	630 - 1250 - 2500	500	1200
K909TB/G	24	630 - 1250 - 2500	400	1200
M909TB/G	36	630 - 1250 - 2500	240	1200
P909TB/G	42	630 - 1250	240	1200

05/2015

Kit contents

The complete (K)(M)(P)909TB/G tee connector kit comprises 3x the following components:

The kit also comprises silicone grease, field control mastic, gloves, roll adhesive tape, installation instructions and crimp chart.

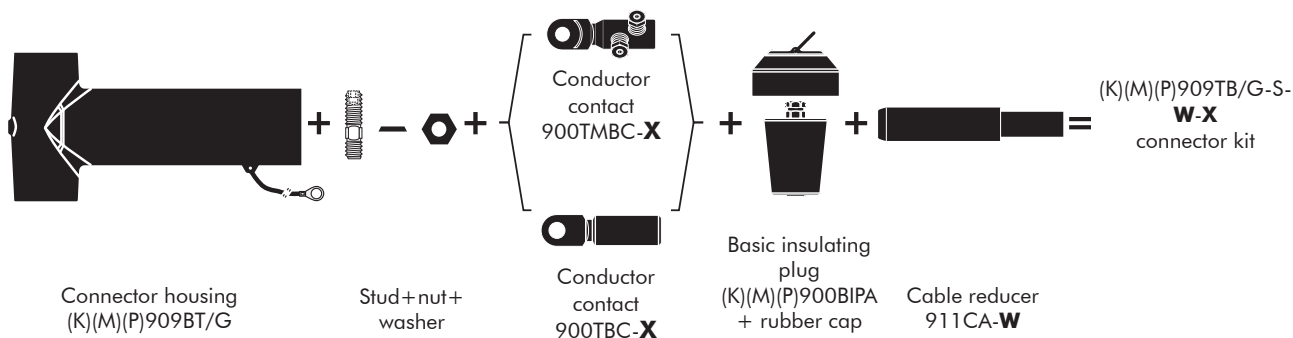

Ordering instructions

To order the tee connector, select the ordering part number which gives the best centring of the core insulation diameter and substitute **X** using table X, according to the conductor size and type.

Add a 'K' for use up to 24 kV, add an 'M' for use up to 36 kV, add a 'P' for use up to 42 kV.

Example:

The copper wire screened cable is 36 kV, 1000 mm² stranded aluminium with a diameter over core insulation of 52 mm.

Order 3 x


M909TB/G-S-43-1000(K) M-12-1 tee connector kit.

Table W

Ordering part number	Dia. over core insulation (mm)	
	min	max
3 x 909TB/G-S-32-X	35	43
3 x 909TB/G-S-37-X	40	48
3 x 909TB/G-S-43-X	46	54
3 x 909TB/G-S-50-X	53	59
3 x 909TB/G-S-53-X	56	62
3 x 909TB/G-S-56-X	59	65
3 x 909TB/G-S-59-X	62	68

Table X

Conductor sizes (mm ²)	Aluminium conductor		Aluminium and copper conductor	Copper conductor
	Deep indent	DIN hexagonal	Bolted	DIN hexagonal
240	240KM-12-1	240KM-12-1	240.300-14-5	240(K)M-11-2
300	300KM-12-1	300KM-12-1		300(K)M-11-2
400	400KM-12-1	400KM-12-2		400(K)M-11-2
500	500KM-12-1	500KM-12-2	400.630-14-5	500(K)M-11-2
630	630KM-12-1	630KM-12-2		630(K)M-11-2
800	800KM-12-1	-	800.1000-14-5	800(K)M-11-2
1000	1000KM-12-1	-		1000(K)M-11-2
1200	1200KM-12-1	-	On request	-



For use with copper tape screened cables.
Order: Kit MT.



For applications outdoors and in humid climate.
Order: +MWS.



For use with other cable types.
Please contact our representative.



For use in potentially explosive atmospheres (for 12 kV max).
Add -/ATEX to part number.



Components can be ordered individually.



When installed on an appropriate equipment bushing:
2500 A in dual cable arrangement

(K)(M)(P)909PB INTERFACE F COUPLING CONNECTOR

**Up to 42 kV
2500 A**

6/10	(12)	kV
6.35/11	(12)	kV
8.7/15	(17.5)	kV
12/20	(24)	kV
12.7/22	(24)	kV
18/30	(36)	kV
19/33	(36)	kV
20.8/36	(42)	kV

Application

Separable coupling connector (bolted type) for dual cable arrangement. It has been designed to be used with 909TB separable tee connectors.

Technical characteristics


- The thick conductive EPDM jacket provides a total safe to touch screen which ensures safety for personnel.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

Design

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer moulded between the insert and the jacket.
4. Interface to fit 909TB.
5. Conductor contact.
6. Basic insulating plug.
7. Cable reducer.
8. Conductive rubber cap.
9. Stud+nut+washer.
10. Earthing lead.

The screen break design enables cable outer sheath testing without removing or dismantling the connector.

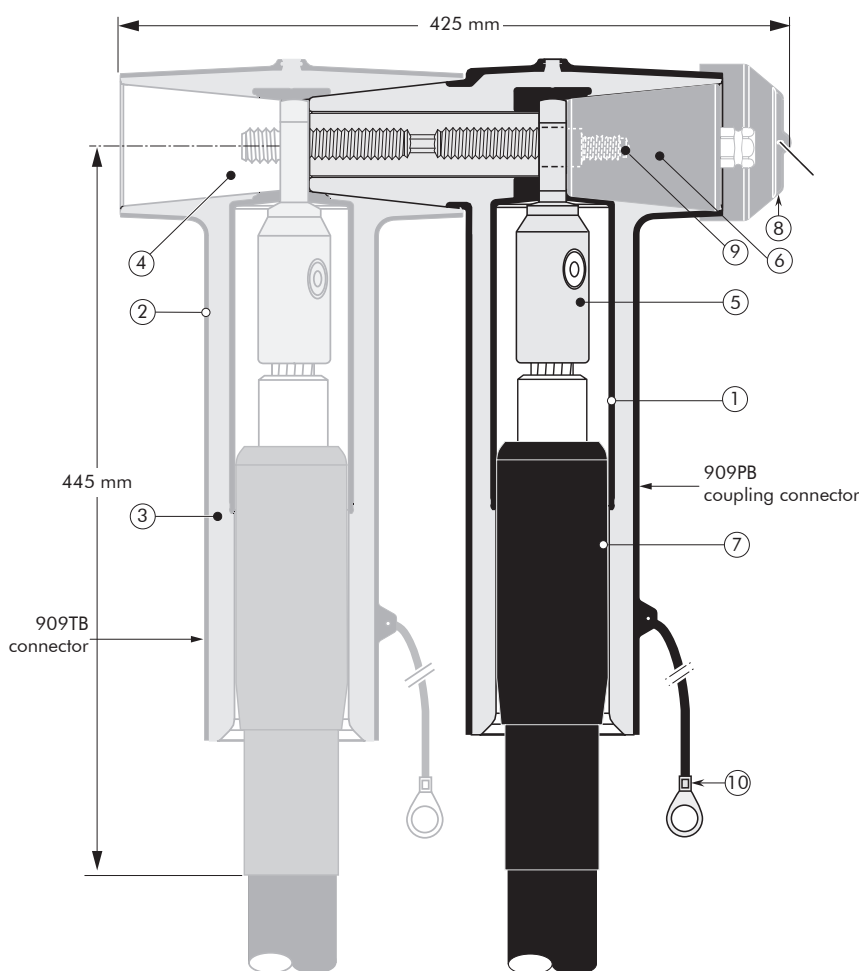

Specifications and standards

The 909PB separable connector meets the requirements of CENELEC HD 629.1.


Separable connector type	Voltage U_m (kV)	Current I_r (A)	Conductor sizes (mm ²)	
			min	max
909PB/G	12	630 - 1250 - 2500	500	1200
K909PB/G	24	630 - 1250 - 2500	400	1200
M909PB/G	36	630 - 1250 - 2500	240	1200
P909PB/G	42	630 - 1250	240	1200

05/2015

Kit contents

The complete (K)(M)(P)909PB/G tee connector kit comprises 3x the following components:

The kit also comprises silicone grease, field control mastic, gloves, roll adhesive tape, installation instructions and crimp chart.

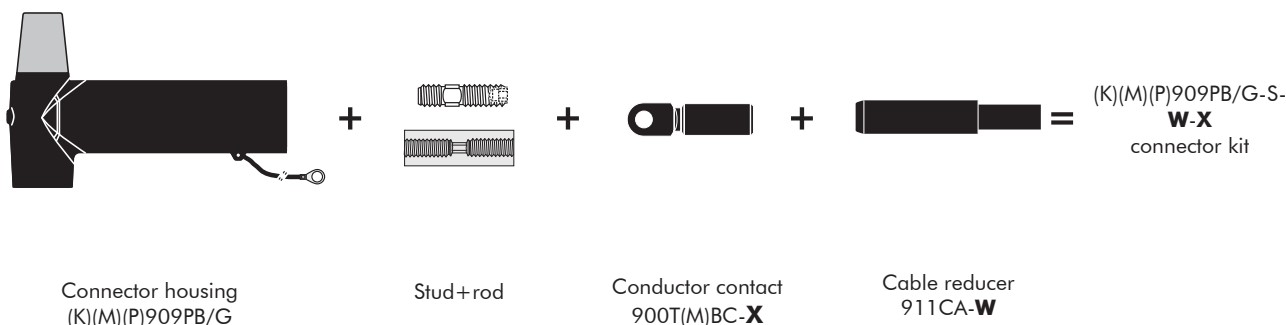

Ordering instructions

To order the tee connector, select the ordering part number which gives the best centring of the core insulation diameter and substitute **X** using table X, according to the conductor size and type.

Add a 'K' for use up to 24 kV, add an 'M' for use up to 36 kV, add a 'P' for use up to 42 kV.

Example:

The copper wire screened cable is 36 kV, 1000 mm² stranded aluminium with a diameter over core insulation of 52 mm.

Order 3 x

M909PB/G-S-43-1000(K)


M-12-1 tee connector kit.

Table W

Ordering part number	Dia. over core insulation (mm)	
	min	max
3 x 909PB/G-S-32-X	35	43
3 x 909PB/G-S-37-X	40	48
3 x 909PB/G-S-43-X	46	54
3 x 909PB/G-S-50-X	53	59
3 x 909PB/G-S-53-X	56	62
3 x 909PB/G-S-56-X	59	65
3 x 909PB/G-S-59-X	62	68

Table X

Conductor sizes (mm ²)	Aluminium conductor		Aluminium and copper conductor	Copper conductor
	Deep indent	DIN hexagonal	Bolted	DIN hexagonal
240	240KM-12-1	240KM-12-1	240.300-14-5	240(K)M-11-2
300	300KM-12-1	300KM-12-1		300(K)M-11-2
400	400KM-12-1	400KM-12-2		400(K)M-11-2
500	500KM-12-1	500KM-12-2	400.630-14-5	500(K)M-11-2
630	630KM-12-1	630KM-12-2		630(K)M-11-2
800	800KM-12-1	-	800.1000-14-5	800(K)M-11-2
1000	1000KM-12-1	-		1000(K)M-11-2
1200	1200KM-12-1	-	On request	-



For use with copper tape screened cables.
Order: Kit MT.



For use in potentially explosive atmospheres (for 12 kV max).
Add -/ATEX to part number.



For use with other cable types.
Please contact our representative.



For applications outdoors and in humid climate.
Order: +MWS.



Components can be ordered individually.



When installed on an appropriate equipment bushing:
2500 A in dual cable arrangement

944TB INTERFACE F ASYMMETRICAL TEE CONNECTOR

Up to 42 kV
Up to 2500 A

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV
18/30 (36) kV
20.8/36 (42) kV

Application

Separable tee shape connector designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors, ...). Also connects cable to cable when using the appropriate mating parts.

Technical characteristics


- The thick conductive EPDM jacket provides a total safe to touch screen which ensures safety for personnel.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

Design

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer moulded between the insert and the jacket.
4. Type F interface as described by CENELEC EN 50180 and 50181.
5. Conductor connector.
6. Clamping screw.
7. Cable reducer.
8. Basic insulating plug (with VD point), type C interface as described by CENELEC EN 50180 and 50181.
9. Conductive rubber cap.
10. Earthing lead.

The screen break design enables cable outer sheath testing without removing or dismantling the connector.

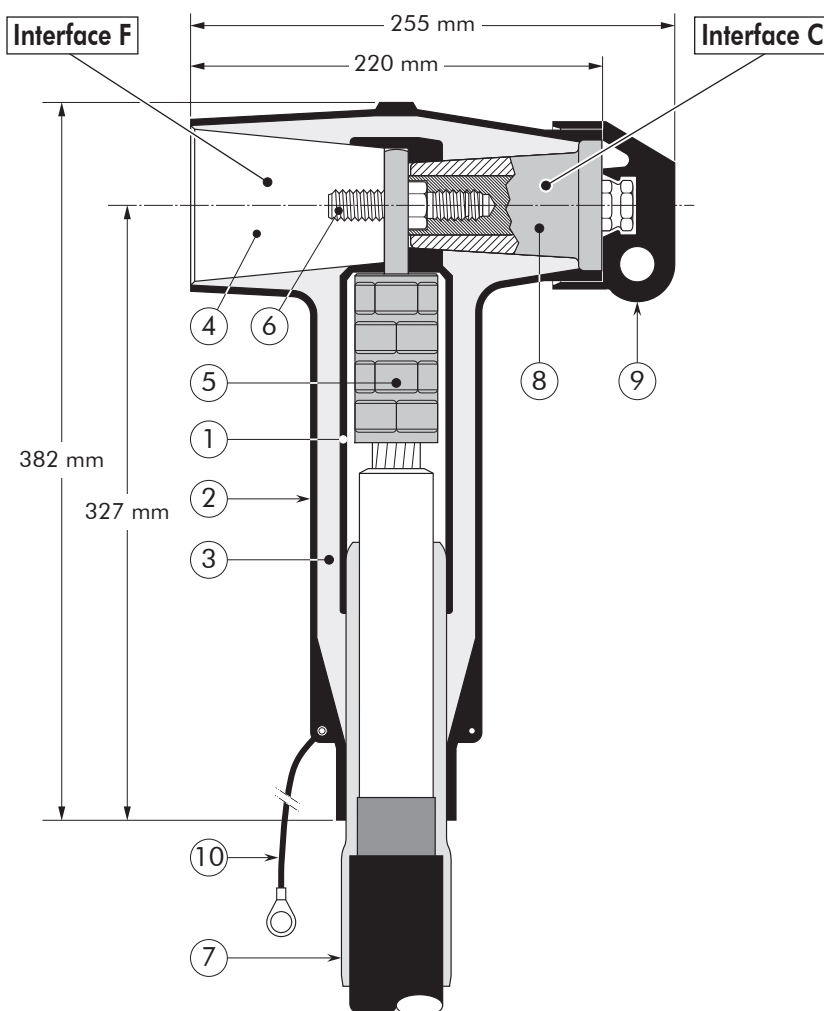

Specifications and standards


The 944TB/G separable connector meets the test requirements of CENELEC HD 629.1.

Separable connector type	Voltage U_m (kV)	Current I_r (A)	Conductor sizes (mm ²)	
			min	max
944TB/G	12	2500	95	800
K944TB/G	24	2500	95	800
M944TB/G	36	2500	95	800
P944TB/G	42	1250	95	800

Kit contents

The complete tee connector kit comprises the following components:

The kit also comprises lubricant, wipers, installation instructions and crimp chart.

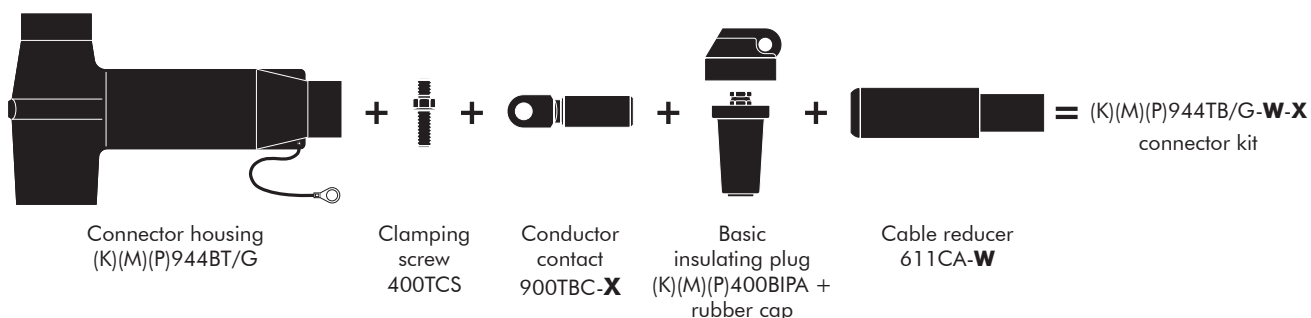

Ordering instructions

To order the tee connector, select the ordering part number which gives you the best centring of your core insulation diameter and substitute **X** using table X, according to your conductor size and type. Add a 'K' for use up to 24 kV, add an 'M' for use up to 36 kV, add a 'P' for use up to 42 kV.

Table W


Ordering part number	Dia. over core insulation (mm)	
	min	max
944TB/G-15-X	16.0	22.0
944TB/G-19-X	20.0	26.5
944TB/G-22-X	23.5	31.0
944TB/G-27-X	28.5	37.5
944TB/G-32-X	34.0	42.5
944TB/G-37-X	39.0	48.5
944TB/G-43-X	45.5	56.0

Table X


Conductor sizes (mm ²)	Aluminium conductor		Copper conductor
	DIN hexagonal	Deep indent	DIN hexagonal
95	95(K)M-12-2	95(K)M-12-1	95(K)M-11-2
120	120(K)M-12-2	120(K)M-12-1	120(K)M-11-2
150	150(K)M-12-2	150(K)M-12-1	150(K)M-11-2
185	185(K)M-12-2	185(K)M-12-1	185(K)M-11-2
240	240(K)M-12-2	240(K)M-12-1	240(K)M-11-2
300	300(K)M-12-2	300(K)M-12-1	300(K)M-11-2
400	400(K)M-12-2	400(K)M-12-1	400(K)M-11-2
500	500(K)M-12-2	500(K)M-12-1	500(K)M-11-2
630	630(K)M-12-2	630(K)M-12-1	630(K)M-11-2
800	-	-	800(K)M-11-2

Example:


The copper wire screened cable is 24 kV, 630 mm² stranded aluminium with a diameter over core insulation of 44.0 mm. Order a K944TB/G-37-630(K)M-12-2 tee connector kit.



For use with copper tape screened cables. Order: Kit MT.



For use with Alu tape or C 33-226 cables. Please contact our representative.



For use with fabric tape (graphite) screened cables. Order additional semi-conductive tape (type TSC).



For use with other cable types. Please contact our representative.



For applications outdoors and in humid climate. Order: +MWS.



Components can be ordered individually.

900AR-1 / 900AR-2 900AR-3 / 900AR-4

INTERFACE F EQUIPMENT BUSHING

Application

For use in equipment, typically for transformers, switchgear, capacitors...

Technical characteristics

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

Up to 42 kV
Up to 2500 A


6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV
18/30 (36) kV
19/33 (36) kV
20.8/36 (42) kV

Specifications and standards

The bolted type equipment bushings 900AR-X are moulded epoxy insulated parts and meet the requirements of CENELEC EN 50180 and IEC 60137.

Ordering instructions

To order the equipment bushing, specify the type. Add a 'K' for use up to 24 kV, add an 'M' for use up to 36 kV, add a 'P' for use up to 42 kV. The bushings can be supplied with an earth jumper (/J) or an earth plate (/GS). This earth connection must be specified when ordering.
E.g. 900AR-4/GS.

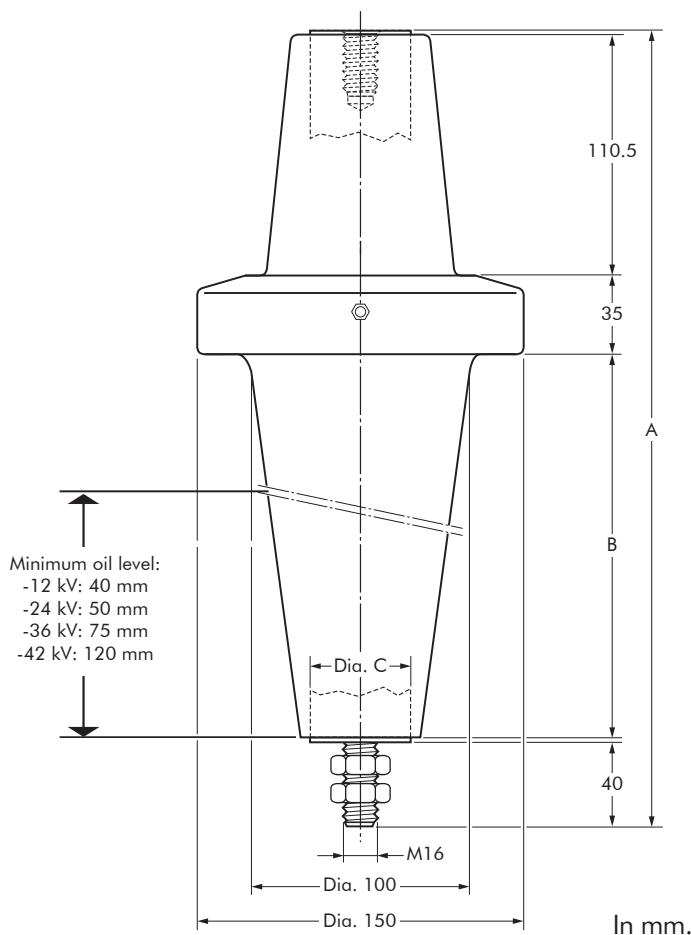


Equipment bushing type	Interface type	Voltage U_m (kV)	Current I_r (A)	Dimensions (mm)		
				A	B	Dia. C
900AR-1	F3	52	1250	364	175	32
900AR-2	F2	52	630	364	175	25
900AR-3	F1	36	2500	364	175	50
900AR-4	F1	36	2500	259	70	50


05/2015

FIXINGS FOR EQUIPMENT BUSHINGS

900AR-X/GS Bushing

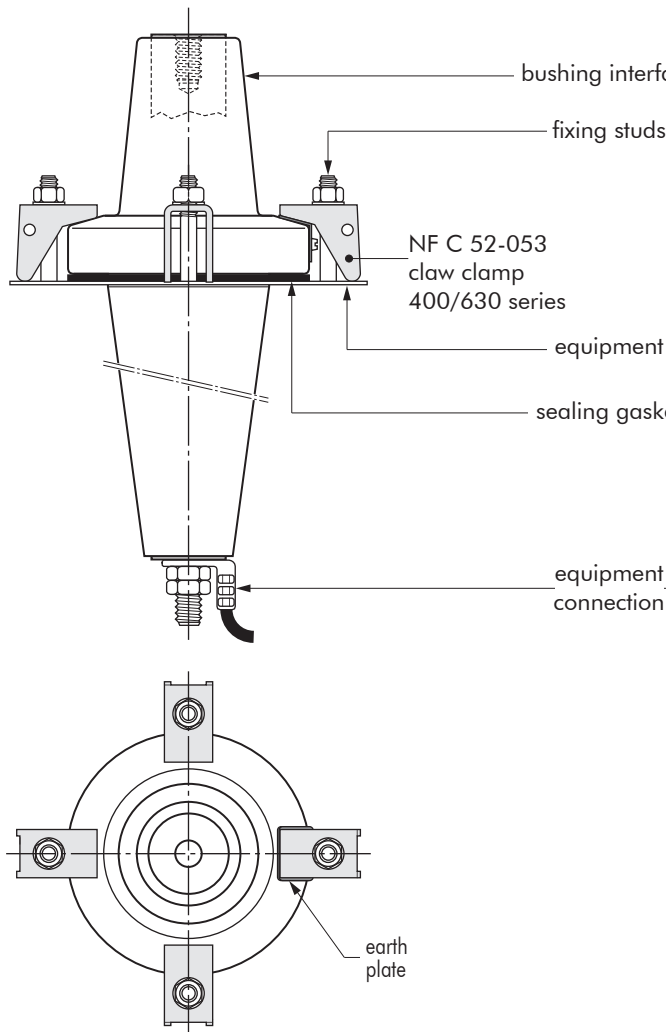

900AR-X/J Bushing

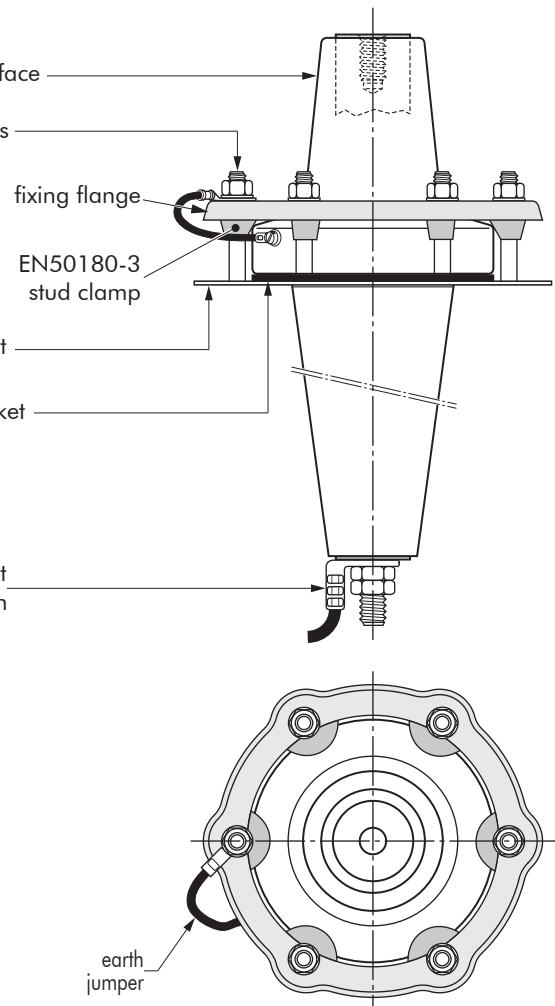

Bushing clamping kit

To order the bushing clamping kit, according to NFC 52-053 standards, simply specify KBC-NF-400.

Contents: - 4 x claw clamp NF400
- 1 x sealing gasket.


Bushing clamping kit

To order the bushing clamping kit with DIN style fixing flange, simply specify KBCDS-400.


Contents: - 1 x fixing flange DIN style
- 6 x stud clamp EN50180-3
- 1 x sealing gasket.

Fixing dimensions standards NF C 52-053

French standards.

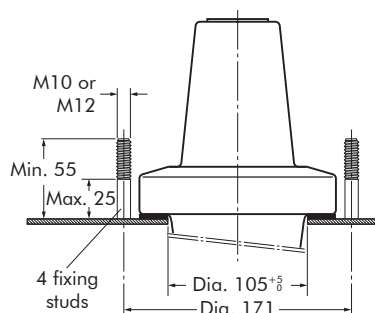

Fixing dimensions

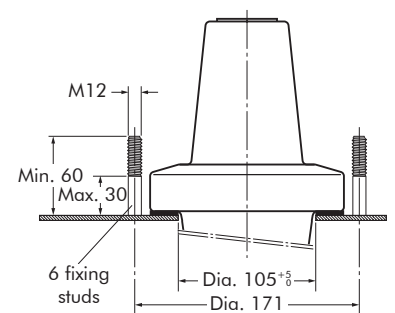

In mm.

ACCESSORIES INTERFACE F

Application

For use with connectors and bushings with an interface F as described by CENELEC EN 50180 and 50181.

Technical characteristics


All these products, except the earthing plugs, are tested for AC withstand and partial discharge prior to leaving the factory.

Up to 42kV

6/10	(12)	kV
6.35/11	(12)	kV
8.7/15	(17.5)	kV
12/20	(24)	kV
12.7/22	(24)	kV
18/30	(36)	kV
19/33	(36)	kV
20.8/36	(42)	kV

900DR-B/G Dead-end receptacle

Fits over a bushing with a type F interface to provide 'dead-end' facility. The dead-end receptacle is supplied with an earth lead.

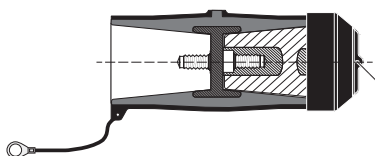


Ordering instructions

Order
900DR-B/G for 12 kV,
K900DR-B/G for 24 kV,
M900DR-B/G for 36 kV or
P900DR-B/G for 42 kV
applications.

900SOP-B Stand-off plug

Is designed to support and 'dead-end' connectors with a type F interface when removed from equipment.




Ordering instructions

Order
900SOP-B for 12 kV,
K900SOP-B for 24 kV,
M900SOP-B for 36 kV or
P900SOP-B for 42 kV
applications.

900GP-B Earthing plug

Is designed to support and earth connectors with a type F interface when removed from equipment.

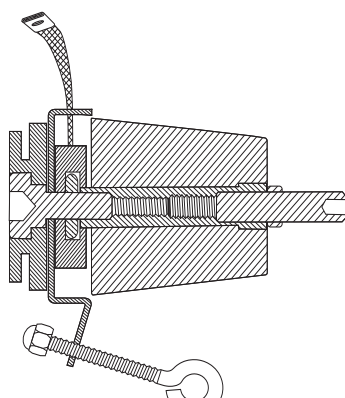


Ordering instructions

Order
900GP-B for 12, 24, 36 or
42 kV applications.

Order
900GP-SBT for a version with a
straight bolt terminal.

900BE/G Bushing extender

Provides an extension piece to allow cables to stand away from equipment. Is used in conjunction with the 400CP, 440CP or 440PB. The bushing extender is supplied with an earth lead.

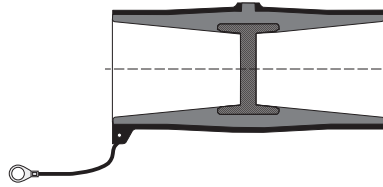

Ordering instructions

Order

900BE/G for 12 kV,

K900BE/G for 24 kV

M900BE/G for 36 kV or

P900BE/G for 42 kV


applications.

**Note: Delivered with stud/
nut/washer.**

POSSIBLE ARRANGEMENTS INTERFACE F


| 909TB/G

Single cable arrangement.

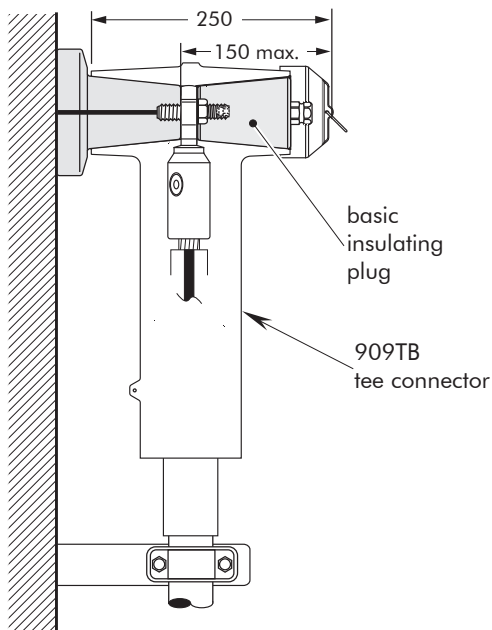


| 909TBM/G-P2

Dual cable arrangement.

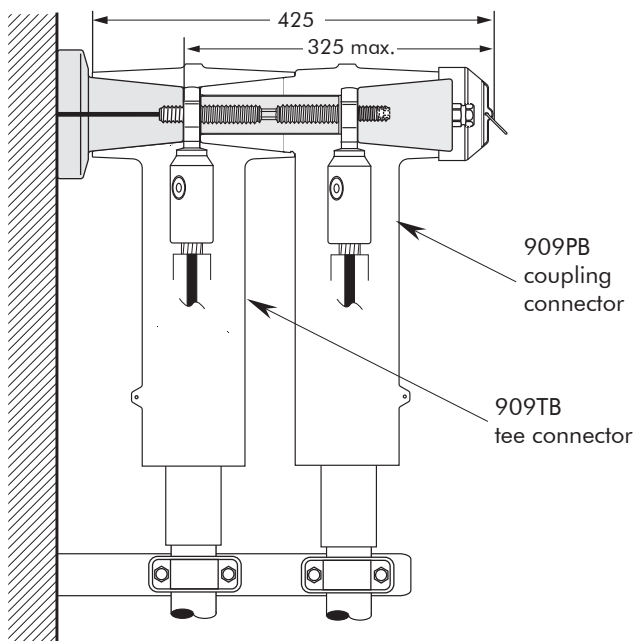


| 909TB/G+900BE/G

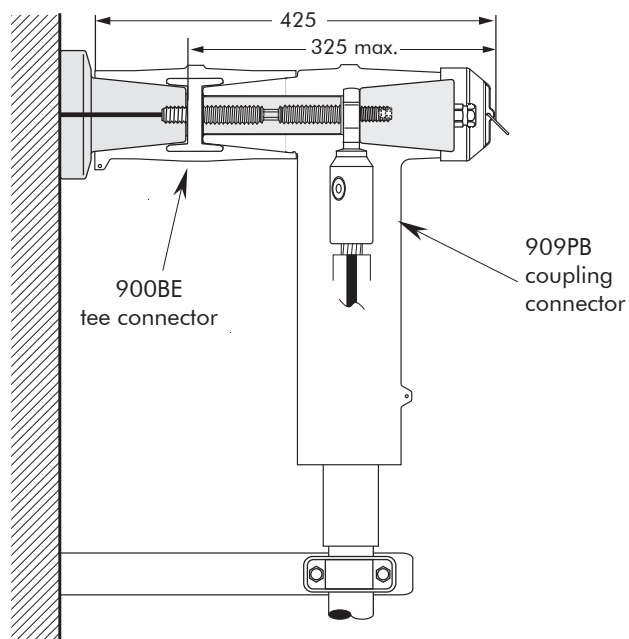


944TB/G

Single cable arrangement.
Order 944TB/G for 12 kV,
K944TB/G for 24 kV,
M944TB/G for 36 kV
or P944TB/G for 42 kV
applications.

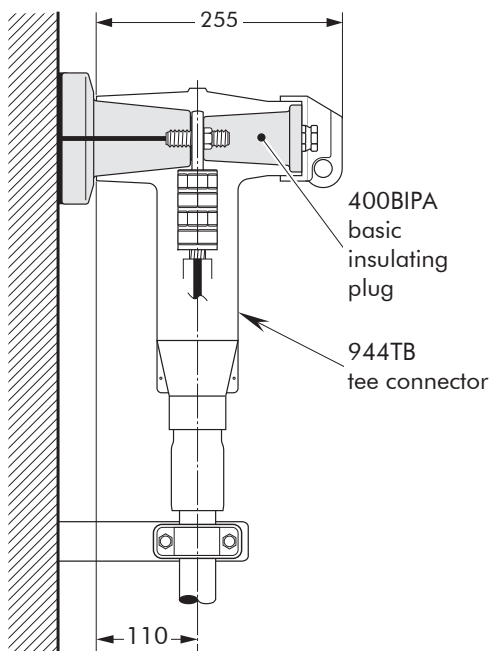


944TBM/G-P2

Dual cable arrangement.
Order 944TBM/G-P2 for 12 kV,
K944TBM/G-P2 for 24 kV,
M944TBM/G-P2 for 36 kV or
P944TBM/G-P2 for 42 kV
applications.

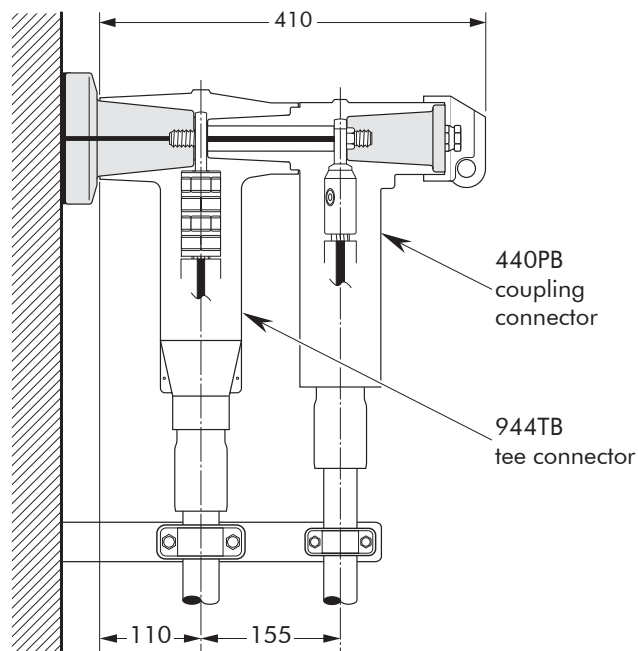

944TB/G-P2

Dual cable arrangement.
Order 944TB/G-P2 for 12 kV,
K944TB/G-P2 for 24 kV,
M944TB/G-P2 for 36 kV or
P944TB/G-P2 for 42 kV
applications.

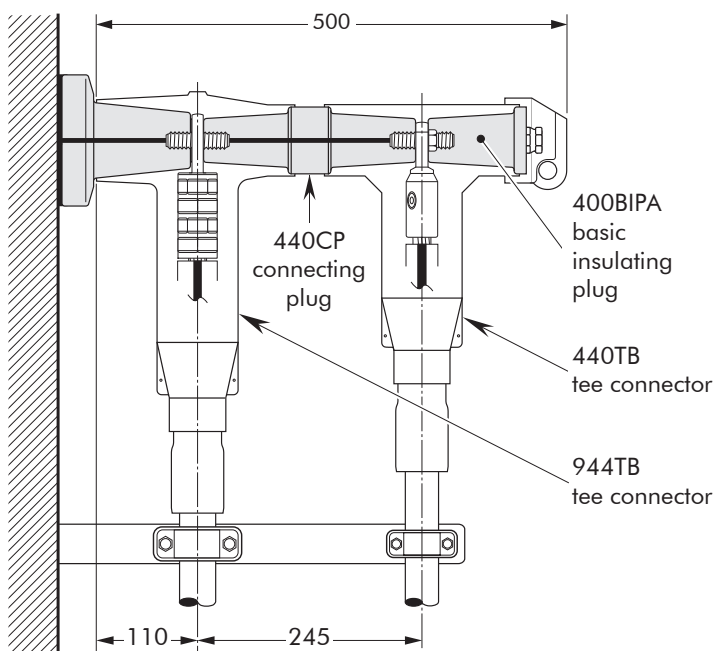

In mm.

Additional catalogue information on power cable accessories
is available by contacting us at the address below:

└ Distributed by:



Euromold
a Nexans company

Nexans Network Solutions N.V. - Div. Euromold
Zuid III, Industrielaan 12, B-9320 Erembodegem
Tel.: +32 (0)53 85 02 11 • sales.euromold@nexans.com • www.euromold.be

Catalogue also available on CD-ROM, Website and Mobile Apps

