




# PG1HTA - PG2HTA - PG3HTA - PG4HTA Instructions for use

## 1- Longitudinal cut

- Position the PG HTA pliers as shown to the desired length.
- Tighten the pliers until the cutting wheel penetrates onto stop rollers.
- Pull the pliers along the length to be stripped in the direction shown by the arrow.

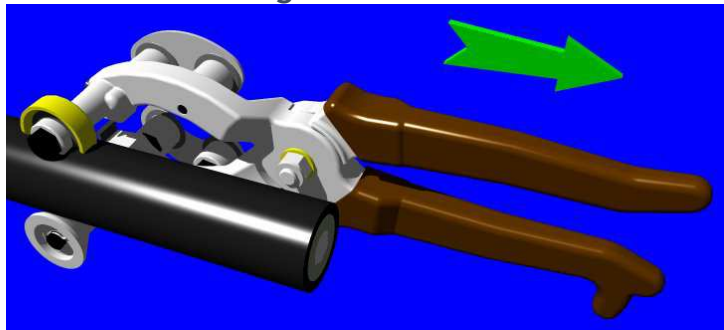


## 2- Circular cut

- Position the PG HTA pliers at the end of the longitudinal cut.
- Close the pliers on the cables pressing slightly to ensure penetration of the cutting wheels.
- Rotate the pliers back and forth by a third of revolution



## 3- Sheath removal

- Use the two end blades to separate the sheath.

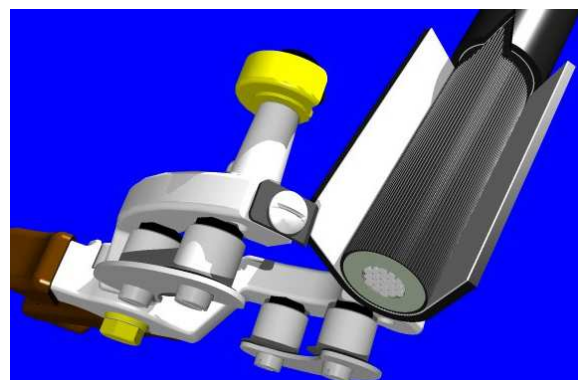

- The tools must be used when the cable is out of tension by skilled workers who are competent in cable preparation and know about electrical phenomena.
- Wearing anti-cut gloves is obligatory.
- Clean the tools after each utilization.