

# BWL Brass Gland



## DESCRIPTION




BWL GLAND FOR SWA CABLE 417AA - SERIES

- To BS6121 Part1
- Suitable for single wire armoured, plastic or rubber sheathed cables
- Application-for use in dry, indoor situations
- Three part gland with separate locking ring
- Shroud may be used for additional ingress protection

## CABLE AND GLAND DETAILS

CABLE DIMENSIONS ACCOMODATED					GLAND REFERENCE		GLAND DIMENSIONS					ACCESSORIES		
DIAMETER		ARMOUR WIRE DIAMETER	SIZE	DESIGN NUMBER	ISO ENTRY THREAD		APPROX. LENGTH FROM SHOULDER	HEXAGON SIZE		BRASS BACKNUT DESIGN NUMBER	SHROUDS DESIGN NUMBER			
UNDER ARMOUR A	OVERALL B				D mm	E mm		ACROSS FLATS G	ACROSS CORNERS H		PVC 401PV-	PCP 401AA-		
MIN mm	MAX mm	MIN mm	MAX mm	C mm										
-	8.6	-	13.2	0.9	16	BWL16	16	10	30	23.4	26.7	429AA-51	02	02
-	11.6	-	15.8	0.9	20S	BWL20S	20	10	32	25.7	29.2	429AA-53	02	02
-	13.9	-	20.8	0.9/1.25	20	BWL20	20	10	32	27.0	30.5	429AA-53	03	03
-	19.9	-	27.2	1.25/1.6	25	BWL25	25	10	33	36.0	40.0	429AA-55	05	05
-	26.2	-	33.5	1.6/2.0	32	BWL32	32	10	35	42.4	48.0	429AA-56	06	06
-	32.1	-	39.9	1.6/2.0	40	BWL40	40	15	36	56.4	61.5	429AA-57	27	07
-	38.1	-	46.3	2.0/2.5	50S	BWL50S	50	15	40	65.5	72.1	429AA-59	28	09
-	44.0	-	52.6	2.0/2.5	50	BWL50	50	15	41	70.1	77.2	429AA-59	09	09
-	50.0	-	58.9	2.5	63S	BWL63S	63	15	39	80.0	87.4	429AA-61	31	11
-	55.9	-	65.3	2.5	63	BWL63	63	15	41	80.0	87.4	429AA-61	31	11
-	61.9	-	71.6	2.5	75S	BWL75S	75	15	47	90.2	99.1	429AA-63	13	13
-	67.9	-	78.0	2.5	75	BWL75	75	15	47	98.8	109.2	429AA-63	33	13

Larger sizes of glands are available upon request.

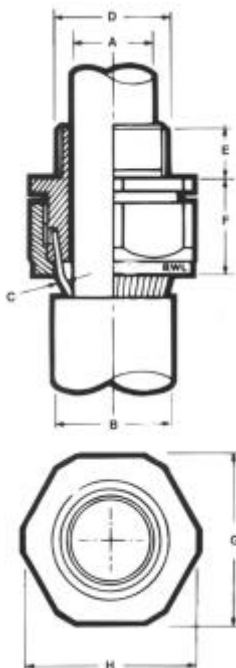

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS, FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS  
FURSE EARTHING  
www.cablejoints.co.uk  
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371  
Tel 0044 117 977 4647 Fax 0044 117 9775582



Formerly Pirelli Cables