

Industrial Gland Kits

E1W LSOH Brass Gland Kit



Application

- > Indoor/outdoor type for SWA cable

Features & Benefits

- > Brass indoor and outdoor cable gland & accessories
- > For circular, galvanized-steel single-wire-armour plastic or rubber sheathed cables with extruded bedding
- > Outer seal grips sheath of cable
- > Inner seal grips bedding layer of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring, ideal for checking electrical continuity
- > Kit comprises:
 - E1W Gland
 - Brass earth tag
 - Zinc plated steel locknut
 - PVC shroud
- > 2 per kit up to and including 25mm size

Technical Data

- > EN 50262
- > BS6121:Pt 1:1989
- > Inner and outer seal rated to IP66
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > CuZn39Pb3 extruded brass alloy used for guaranteed strength and performance




Ref: E1W/06/07



www.heatracing.co.uk
Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582
www.thorneandderrick.co.uk



E1W LSOH Brass Gland Kit

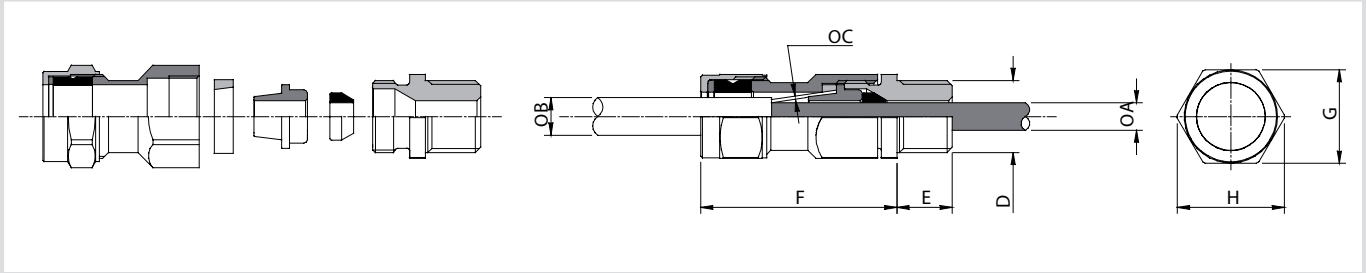

Gland Details

Cable Dimensions mm					Kit Reference			Gland Dimensions mm				
Under Armour Diameter A		Overall Diameter B		Armour Wire Diameter C	Size	Design Number	Items Per Kit	Entry Thread		Approx. Length from Shoulder F	Hexagon Size	
Min	Max	Min	Max					Size D	Length E		Across Flats G	Across Corners H
6.3	8.6	8.0	13.2	0.9	20SS	E1W20SSK	2	M20×1.5	15	44	23.4	26.7
8.7	11.6	8.0	15.8	0.9/1.25	20S	E1W20SK	2	M20×1.5	15	46	25.7	29.2
11.7	13.9	11.7	20.8	0.9/1.25	20	E1W20K	2	M20×1.5	15	46	30.5	34.0
13.0	19.9	17.0	27.2	1.25/1.6	25	E1W25K	2	M25×1.5	15	51	37.6	42.2
20.0	26.2	23.5	33.5	1.6/2.0	32	E1W32K	1	M32×1.5	15	56	47.3	53.6
26.3	32.1	29.0	39.9	1.6/2.0	40	E1W40K	1	M40×1.5	15	59	56.4	61.5
32.2	38.1	38.0	46.2	2.0/2.5	50S	E1W50SK	1	M50×1.5	15	64	60.0	66.0
38.2	44.0	39.5	52.6	2.0/2.5	50	E1W50K	1	M50×1.5	15	64	70.1	77.2
44.1	50.0	50.0	58.9	2.5	63S	E1W63SK	1	M63×1.5	15	67	75.0	83.0
50.1	55.9	51.3	65.3	2.5	63	E1W63K	1	M63×1.5	15	67	80.0	87.4
56.0	61.9	62.0	71.6	2.5	75S	E1W75SK	1	M75×1.5	15	76	90.2	99.1
62.0	67.9	62.5	78.0	2.5	75	E1W75K	1	M75×1.5	15	76	98.8	109.2