

Explosion Proof Glands

BARR-Pb EEx d IIC Brass Barrier Gland 424TP Series



Application

- > For lead sheathed OCMA type cables



Features & Benefits

- > Brass indoor and outdoor cable gland for use in Zone 1 and Zone 2 hazardous areas
- > Suitable for circular, galvanised steel single wire armour cables with extruded polymeric oversheath and lead inner sheath
- > Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- > Provides mechanical cable retention and electrical continuity through the armour wire termination
- > Provides electrical continuity to the inner lead sheath
- > Suitable for most climatic conditions – weatherproof & waterproof
- > Nickel plated versions also available
- > Matching accessory kits available



Technical Data

- > Certified II 2GD, EEx e II & EEx d IIC under ATEX directive 94/9/EC
- > Certificate number Sira04ATEX1080X
- > Service temperature range -60°C to +90°C
- > May be used in:
 - Zones 0, 1 & 2 with EEx ia IIA, B & C equipment
 - Zones 1 & 2 with EEx ib IIA, B & C equipment
 - Zones 1 & 2 with EEx d IIA, B & C equipment with any volume
 - Zones 1 & 2 with EEx e II equipment
 - Zones 1 & 2 with EEx p II equipment
 - Zone 2 with EEx nA II equipment
 - Zone 2 with EEx nR II equipment
 - Zones 21 & 22 with EEx tD II equipment

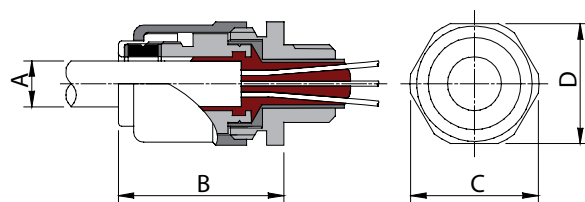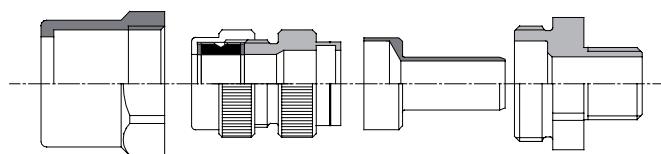

Gland Details

Basic Size	Gland References & Thread Sizes				Cable Dimensions, mm			Gland Dimensions			
	Metric		NPT		Max. Dia. Over Conductors	Max. No. of Conductors	Overall Dia. 'A'		Approx. Length 'B'	Hexagon Size	
	Design No.	Thread Size *	Design No.	Thread Size			Min	Max		A/C 'C'	A/F 'D'
20	424TA53	M20 × 1.5	424TA03	½" - 14 NPT	11.0	30	8.9	15.7	56	40.0	36.0
25	424TA55	M25 × 1.5	424TA05	¾" - 14 NPT	16.0	42	13.0	19.3	59	48.0	42.4
32	424TA56	M32 × 1.5	424TA06	1" - 11½ NPT	22.1	60	17.0	25.4	59	53.6	47.2
40	424TA57	M40 × 1.5	424TA07	1¼" - 11½ NPT	28.2	100	24.1	30.0	63	61.5	56.4
50	424TA59	M50 × 1.5	424TA09	2" - 11½ NPT	37.1	200	29.0	41.9	66	77.2	70.1
63	424TA61	M63 × 1.5	424TA11	2½" - 8 NPT	48.4	400	40.9	52.8	69	87.4	80.0
75	424TA63	M75 × 1.5	424TA13	3" - 8 NPT	58.6	400	49.8	59.9	80	109.2	98.8
85	424TA64	M85 × 2	424TA14	3" - 8 NPT	65.8	400	58.9	73.9	83	116.8	106.2



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582