

150 SERIES

BOTTLE SHAPES

WITH RIB - VG STYLE




CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

This style is used in conjunction with a circular grooved adaptor, providing strain relief and environmental sealing.

For VG shapes according to T07 add 'P' after Hellermann part number.

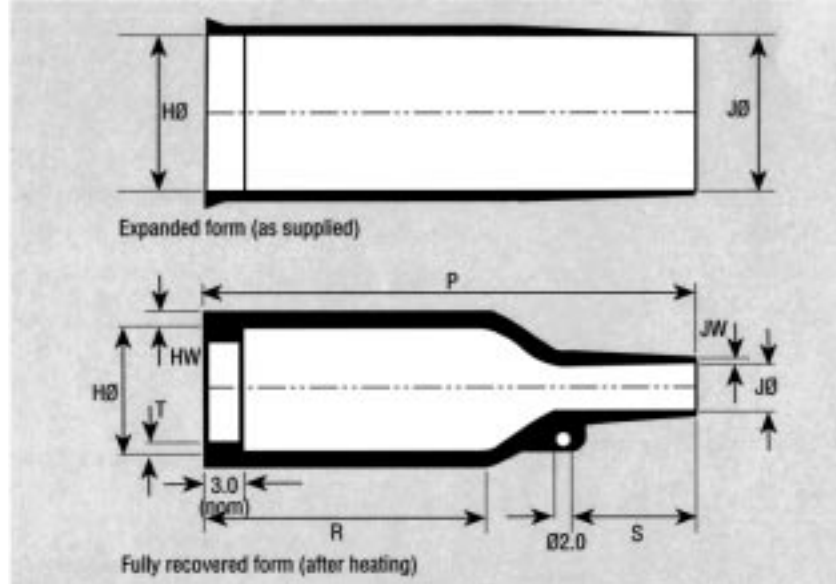

Dimensions apply to all materials unless otherwise indicated and are in mm.

VG Part No.	Hellermann Part No.	Expanded (Min)				Recovered (Max)			Recovered dimensions fully shrunk				
		H	H -H matl	J	J -H matl	H	J	P ±10%	R ±10%	S nom	T ±20%	HW ±20%	JW ±20%
VG 95343 T 06 B 001 A	* 152-42	24.0	24.0	24.0	24.0	10.5	6.0	38.0	21.0	10.0	1.0	1.6	0.5
VG 95343 T 06 B 002 A	* 153-42	25.0	25.0	9.0	9.0	14.0	3.5	55.0	28.0	16.0	1.0	1.8	0.5
VG 95343 T 06 B 003 A	* 154-42	30.0	30.0	30.0	30.0	14.0	6.0	55.0	32.0	13.0	1.0	1.8	1.0
VG 95343 T 06 B 004 A	* 155-42	31.0	31.0	31.0	31.0	18.0	7.0	67.0	35.0	18.0	1.0	1.8	1.0
VG 95343 T 06 B 005 A	* 156-42	36.0	36.0	36.0	36.0	22.5	8.5	80.0	42.0	20.0	1.0	2.0	1.0
VG 95343 T 06 C 001 A	* 157-43	43.0	43.0	43.0	43.0	28.0	10.0	99.0	61.0	20.0	1.7	2.2	1.0
VG 95343 T 06 C 002 A	* 158-43	60.0	60.0	60.0	60.0	35.0	16.0	130.0	72.0	38.0	1.7	3.2	1.5
VG 95343 T 06 C 003 A	* 159-43	66.0	66.0	51.0	51.0	45.0	17.0	171.0	90.0	50.0	2.0	3.8	2.0
VG 95343 T 06 C 004 A	160-43	82.0	81.0	82.0	81.0	58.0	27.0	213.0	113.0	62.0	2.0	3.8	3.8

Non-standard products with reduced overall lengths

VG 95343 T 06 A 001 A	152-41	24.0	24.0	24.0	24.0	10.5	6.0	26.0	9.0	10.0	1.0	1.6	0.5
VG 95343 T 06 A 002 A	153-41	25.0	25.0	9.0	9.0	14.0	3.5	40.0	13.0	16.0	1.0	1.8	0.5
VG 95343 T 06 A 003 A	154-41	30.0	30.0	30.0	30.0	14.0	6.0	43.0	20.0	13.0	1.0	1.8	1.0
VG 95343 T 06 A 004 A	155-41	31.0	31.0	31.0	31.0	18.0	7.0	47.0	15.0	18.0	1.0	1.8	1.0
VG 95343 T 06 A 005 A	156-41	36.0	36.0	36.0	36.0	22.5	8.5	60.0	22.0	20.0	1.0	2.0	1.0
VG 95343 T 06 A 006 A	157-41	43.0	43.0	43.0	43.0	28.0	10.0	60.0	21.0	20.0	1.7	2.2	1.0
VG 95343 T 06 B 006 A	157-42	43.0	43.0	43.0	43.0	28.0	10.0	79.0	41.0	20.0	1.7	2.2	1.0
VG 95343 T 06 A 007 A	158-41	60.0	60.0	60.0	60.0	35.0	16.0	90.0	32.0	38.0	1.7	3.2	1.5
VG 95343 T 06 B 007 A	158-42	60.0	60.0	60.0	60.0	35.0	16.0	110.0	52.0	38.0	1.7	3.2	1.5
VG 95343 T 06 A 008 A	159-41	66.0	66.0	66.0	51.0	45.0	17.0	130.0	50.0	50.0	2.0	3.8	2.0
VG 95343 T 06 B 008 A	159-42	66.0	66.0	51.0	51.0	45.0	17.0	150.0	70.0	50.0	2.0	3.8	2.0
VG 95343 T 06 A 009 A	160-41	82.0	81.0	82.0	81.0	58.0	27.0	137.0	37.0	62.0	2.0	3.8	3.8
VG 95343 T 06 B 009 A	160-42	82.0	81.0	82.0	81.0	58.0	27.0	158.0	58.0	62.0	2.0	3.8	3.8

MATERIALS AVAILABLE

Reference	Def-Stan Ref	Description
B7 *	DA	Semi-rigid flame retarded polyolefin
G *	DE	Fluid resistant elastomer
J	DB	Flexible polyolefin
H *	DF	Flexible limited fire hazard material

ADHESIVE COATING OPTIONS

Reference	Def-Stan Ref	Description
WM250	WL	General purpose hot melt +80°C
W8	WH	High performance hot melt +105°C

For ordering procedure – refer to page 5

* Standard products and materials.