


BS6622/BS7835 Three Core Armoured 11kV XLPE Stranded Copper Conductors

CABLE CHARACTERISTICS

Bending radius $r=12D$ 

WWW.CABLEJOINTS.CO.UK
 THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS6360 Class 2.

CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as a standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

copper tapes applied overlapped to provide an earth fault current path.

5.LAYING UP

Three cores laid up with polypropylene string fillers to form a compact circular cable, and bound with tape.

6.TAPE BINDER

7.SHEATH


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

8.ARMOURING

Single layer of galvanised circular steel wires.

9.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified
 e.g medium density polyethylene (MDPE).

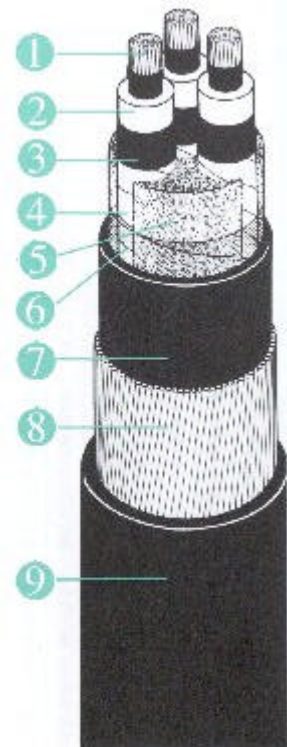

BS6622/BS7835 Three Core Armoured 11kV XLPE Stranded Copper Conductors

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal diameter over insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no./mm	Nominal thickness of PVC/LSOH oversheath mm	Nominal overall diameter of cable mm
50	3.4	17.0	1.4	50/2.5	2.6	53.1
70	3.4	18.8	1.4	54/2.5	2.7	57.1
95	3.4	20.5	1.5	59/2.5	2.8	61.2
120	3.4	22.0	1.6	62/2.5	3.0	65.0
150	3.4	23.3	1.6	65/2.5	3.1	68.0
185	3.4	25.1	1.7	70/2.5	3.2	72.3
240	3.4	27.3	1.8	61/3.15	3.4	79.0
300	3.4	29.6	1.9	65/3.15	3.6	84.5
400	3.4	32.3	2.0	70/3.15	3.8	90.9

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Minimum bending radius mm	Nominal internal diameter of ducts mm
50	5.5	750	650	100
70	6.4	500	700	100
95	7.5	500	750	100
120	8.6	500	800	100
150	9.6	450	850	125
185	11.2	450	900	125
240	14.2	450	950	125
300	16.5	350	1050	125
400	19.7	300	1100	125

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m	Reactance at 50Hz μOhms/m	Impedance at 50Hz μOhms/m	Maximum capacitance pF/m	Maximum charging current at normal voltage and frequency mA/m
50	387	494	115	506	260	0.52
70	268	343	108	360	298	0.60
95	193	248	102	268	334	0.67
120	153	196	98.8	220	365	0.73
150	124	159	96.2	186	392	0.78
185	99.1	128	93.1	158	430	0.86
240	75.4	98	90.0	134	476	0.95
300	60.1	80	87.4	119	524	1.05
400	47.0	64	84.9	106	580	1.16

BS6622/BS7835 Three Core Armoured 11kV XLPE Stranded Copper Conductors

Ratings Data

Cross-sectional area mm ²	Current Ratings			Short circuit ratings	
	Laid direct in ground Amps	Drawn into ducts Amps	Laid in air Amps	One second short circuit rating of conductor kA	One second short circuit rating of copper tape screen per core kA
50	210	180	220	6.8	-
70	255	215	270	9.8	-
95	300	255	330	13.3	Typically
120	340	290	375	17.2	Less
150	380	330	430	21.2	Then
185	430	370	490	26.6	1kA
240	490	425	570	34.9	-
300	540	470	650	43.8	-
400	590	520	700	57.3	-

Current Ratings Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of burial	0.8m
Thermal resistance of soil	1.2°C m/W



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK



Formerly Pirelli Cables