


# BS6622/BS7835 Single Core Armoured 33kV XLPE Stranded Copper Conductor

## CABLE CHARACTERISTICS



Bending radius  $r=15D$



WWW.CABLEJOINTS.CO.UK  
THORNE & DERRICK UK  
TEL 0044 191 490 1547 FAX 0044 477 5371  
TEL 0044 117 977 4647 FAX 0044 977 5582  
WWW.THORNEANDDERRICK.CO.UK

## CABLE DESCRIPTION

### 1.CONDUCTOR

Compact circular stranded copper conductor complying with BS6360 Class 2.

### CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

### 2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

### 3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as standard but fully bonded screens may be provided if specified.

### 4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

### 5.BEDDING


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

### 6.ARMOURING

Single layer of circular aluminium wires.

### 7.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g. medium density polyethylene (MDPE).

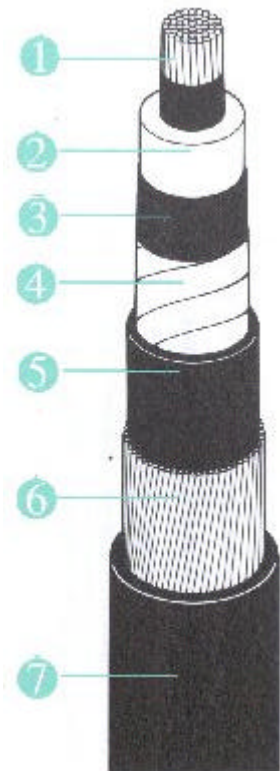

BS6622/BS7835 Single Core Armoured 33kV  
XLPE Stranded Copper Conductor

Constructional Data

Cross-sectional area	Minimum average thickness of insulation	Nominal diameter over insulation	Nominal thickness of PVC/LSOH bedding	Nominal number and diameter of armoured wires	Nominal thickness of PVC/LSOH oversheath	Nominal overall diameter of cable
mm²	mm	mm	mm	no/mm	mm	mm
50	8	27.1	1.2	46/2.0	2.2	39.4
70	8	28.9	1.2	48/2.0	2.2	41.4
95	8	30.6	1.2	51/2.0	2.3	43.3
120	8	32.1	1.2	53/2.0	2.3	44.8
150	8	33.4	1.3	44/2.5	2.4	47.5
185	8	35.2	1.3	46/2.5	2.5	49.5
240	8	37.4	1.3	49/2.5	2.5	51.7
300	8	39.7	1.4	52/2.5	2.6	54.4
400	8	42.4	1.4	55/2.5	2.7	57.3
500	8	45.3	1.5	58/2.5	2.8	60.6
630	8	48.7	1.5	62/2.5	2.9	64.2
800	Please refer to	our technical	department	for	further	information
1000	Please refer to	our technical	department	for	further	information

Installation Data

Cross-sectional area	Appoximate cable weight	Nominal drum length	Minimum bending radius	Nominal internal diameter of ducts
mm²	kg/m	m	mm	mm
50	2.1	1000	850	100
70	2.4	500	900	100
95	2.7	500	950	100
120	3.1	500	950	100
150	3.6	500	1000	100
185	4.0	500	1050	100
240	4.7	500	1100	100
300	5.5	500	1150	100
400	6.4	250	1250	100
500	7.6	250	1300	125
630	9.1	250	1350	125
800	Please refer to	our technical	department for	further information
1000	Please refer to	our technical	department for	further information

Electrical Data

Cross-sectional area	Maximum DC resistance of conductor at 20°C	Maximum AC resistance of conductor at 90°C	Reactance at 50Hz	Impedance at 50Hz	Maximum Capacitance	Maximum charging current at normal voltage and frequency
mm²	µOhms/m	µOhms/m	µOhms/m	µOhms/m	pF/m	mA/m
50	387.0	494	160	578	138	0.83
70	268.0	343	151	374	154	0.92
95	193.0	248	143	285	169	1.01
120	153.0	196	137	239	183	1.10
150	124.0	159	135	207	194	1.16
185	99.1	128	130	181	210	1.26
240	75.4	98	125	158	229	1.37
300	60.1	80	121	144	249	1.49
400	47.0	64	116	132	273	1.64
500	36.6	51	113	123	298	1.79
630	28.3	42	108	115	327	1.96
800	Please refer	to our	technical	department	for further	information
1000	Please refer	to our	technical	department	for further	information

# BS6622/BS7835 Single Core Armoured 33kV XLPE Stranded Copper Conductor

## Ratings Data

Cross-sectional area  mm <sup>2</sup>	Current Ratings			Short Circuit Ratings	
	Laid in ground	Drawn into ducts	Laid in air	One second short circuit rating of conductor kA	One second short circuit rating of copper tape screen kA
	Amps	Amps	Amps		
50	220	210	260	6.8	-
70	270	260	320	9.8	-
95	320	300	380	13.3	-
120	360	340	440	17.2	-
150	410	370	490	21.2	-
185	450	400	560	26.6	Typically
240	510	450	650	34.9	Less
300	570	490	730	43.8	Then
400	640	530	830	57.3	1kA
500	700	570	940	72.3	-
630	760	610	1050	91.2	-
800	Please refer to	our technical	department for	further information	-
1000	Please refer to	our technical	department for	further information	-

### Current Rating Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of burial	0.8m
Thermal resistance of soil	1.2°C m/W

Single core cables in trefoil, bonded and earthed at both ends.



WWW.CABLEJOINTS.CO.UK  
**THORNE & DERRICK UK**  
 TEL 0044 191 490 1547 FAX 0044 477 5371  
 TEL 0044 117 977 4647 FAX 0044 977 5582  
 WWW.THORNEANDDERRICK.CO.UK



Formerly Pirelli Cables