

# Scotch® 24

## Electrical Shielding Tape

### Data Sheet



#### Product Description

ScotchBrand 24 Electrical Shielding Tape is an all-metal, open-weave, shielding braid tape in a flat, cable-like form. It is conformable due to the open-weave knit construction of two No.36 AWG tinned copper wires.

#### Tape Features

- ❖ Tinned copper conductors.
- ❖ Stable at elevated temperatures.
- ❖ Oil resistant.
- ❖ Compatible with power cable insulations.
- ❖ Fire resistant.
- ❖ Elongates easily to conform to inclined or uneven surfaces.
- ❖ Corrosion resistant.
- ❖ Compatible with all high-voltage splicing and terminating materials.
- ❖ Unaffected by solvents, UV, ozone, and moisture.
- ❖ Because of its construction, the tape interlocks with the previous layer, thereby assuring a tighter wrap (no solder bead is required).
- ❖ The porosity of Scotch24 Tape will permit complete resin saturation when splicing.
- ❖ Usable for indoor and outdoor applications.

#### Applications

- ❖ To provide shielding for cable joints on shielded power cables.
- ❖ To make the conductive portion of the stress cone on power cable terminations.
- ❖ To smooth connector area in oil-filled cables.

#### Data – Physical and Electrical Properties

##### Physical Properties

Test Method	Typical Value*
Thickness ASTM-D1000-76	0.406mm
Breaking Strength	
ASTM-D1000-76	38N/cm
Elongation ASTM-D1000-76	70%
Weather Resistance	
(Stretched and Unstretched)	Pass
Shelf Life	Indefinite

##### Electrical Properties

Test Method	Typical Value*
Electrical Resistance – (3M)	0.3Ω/M
Wire Size	Two 0.0126mm <sup>2</sup> tinned copper wires

#### Chemical Properties

Ozone Resistant ASTM-D1373-67	Pass
Water Absorption	Zero
Resistance to Ultraviolet (3M)	Pass

#### Specifications

##### Product

Conducting metal tape must be woven of No.36 AWG tinned copper wire and be capable of operating at the emergency cable temperature of 130°C/266°F. It must be usable uncovered, indoors and outdoors, in a highly stretched condition without corroding, tearing or splitting. It must be non-flammable and be compatible with cable oils, common solvents, adhesives, and high-voltage splicing and terminating insulations.

##### Engineering/Architectural Specification

Joining (splicing) and terminating shall be done according to the engineering print supplied by the manufacturer of the joining or termination materials for the specific cable and approved by the specifying engineer. Alternate – The joining and terminating engineering drawing shall be compatible with the specific cable or cables and approved for the specific voltage of the cable.

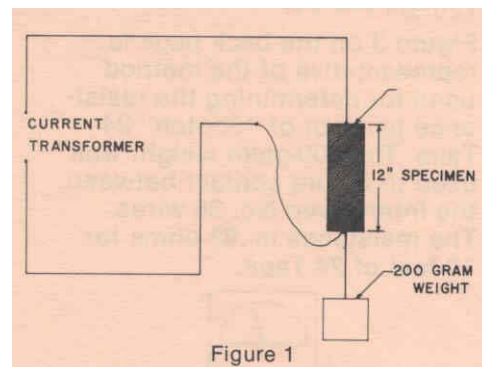


Figure 1

#### Characteristics and Test Data

Tests were designed to determine how long a 12-inch specimen of Scotch 24 Tape would withstand a given amount of current before separating. A 200 gram weight was attached to the 24 Tape to ensure contact between the strands of the copper mesh. The test ended when Scotch 24 separated, due to the melting of the tinned copper wires. Figure 2 on the back page illustrates the results.



# Scotch® 24

## Electrical Shielding Tape

### Data Sheet

The data indicates that Scotch 24 Tape has excellent current carrying capacities for replacing the electrostatic shielding in high-voltage cables. It should not be used as a ground strap or jumper wire because it will not carry the large fault currents and lightning currents that often appear in high voltage cables.


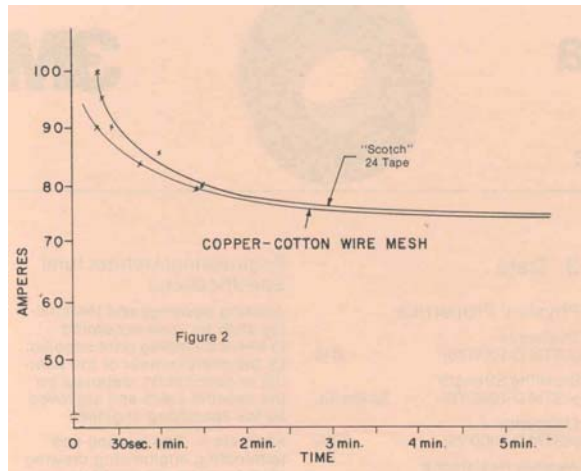


Figure 3 is representative of the method used for determining the resistance per foot of Scotch 24 Tape. The 200-gram weight was used to ensure contact between the interwoven No.36 wires. The resistance is .92 ohms for 10 feet of 24 Tape.

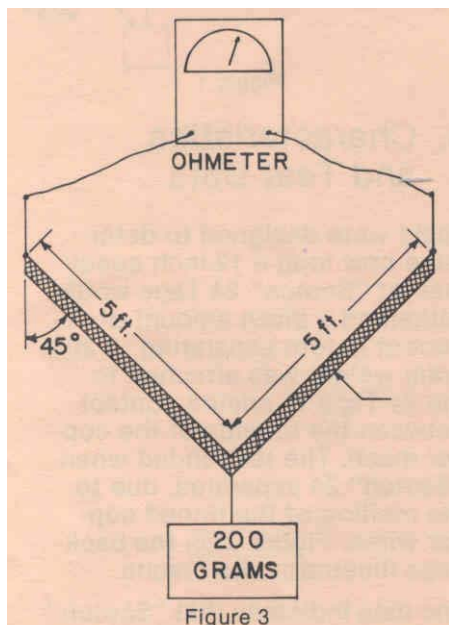

When constructing tape terminations and splices, overwrap area according to 3M prints with one half-lapped layer of Scotch 24 Tape to continue electrostatic shielding. When using resin-pressure methods, overwrap splice area with one quarter-lapped layer of Scotch 24 Tape. Solder 24 Tape ends to cable metallic shielding. CAUTION: "Scotch" 24 Tape should not be used as a ground strap or jumper wire. Its ampacity is not great enough to carry large fault currents. **Note:** A solder bead across 24 Tape is not necessary to hold it in place. Techniques for the proper use of this conductive tape are contained in standard and special prints available through the 3M Electro-Products Division Representative.

### Maintenance

Scotch 24 Tape has an indefinite storage life. Because of its open-weave knit construction, 24 Tape will not telescope while on the roll. The tape can be checked for resistance with an ohm meter. Probes touching the surface one foot apart should measure .092 ohms or less. The tape is not impaired by freezing nor by over-heated conditions.

### Important Notice

Technical information provided by 3M is based on experience and/or tests believed to be reliable, but their accuracy is not guaranteed and the results may not be relevant to every user's application. For this reason 3M does not accept responsibility or liability, direct or consequential, arising from reliance upon any information provided and the user should determine the suitability of the products for their intended use. Nothing in this statement will be deemed to exclude or restrict 3M's liability for death or personal injury arising from its negligence. All questions of liability relating to 3M products are governed by the seller's terms of sale subject where applicable to the prevailing law. If any goods supplied or processed by or on behalf of 3M prove on inspection to be defective in material or workmanship, 3M will (at its option) replace the same or refund to the Buyer the price paid for the goods or services. Except as set out above, all warranties and conditions, whether express or implied, statutory or otherwise are excluded to the fullest extent permissible at law.

3M and Scotch are trademarks of the 3M Company. Printed in the UK.  
© 3M United Kingdom PLC, 2003



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS  
FURSE EARTHING  
www.cablejoints.co.uk  
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371  
Tel 0044 117 977 4647 Fax 0044 117 9775582