

3M**Scotchcast****T&D**CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582

72-N Series Signal and Control Inline Splicing Kits

Product Description

3M™ Scotchcast™ 72-N series inline splicing kits are a series of rigid body splices tailored for joining signal and control cables. The kits are designed to accommodate shielded or unshielded constructions of plastic or rubber jacketed cables. Six kit sizes cover a range of cables up to 100 pair (200 conductors) 10 AWG or 200 pair (400 conductors) 22 AWG.

The 72-N series splice consists of a rigid body mold filled with pliable polyurethane Scotchcast Electrical Insulating and Sealing Compound 2104.

Jumper wires with clips provide for shield continuity on shielded cables. Built-in spacer webbing automatically provides for cable centering and proper compound coverage. The kits are sized for, but do not include, 3M™ Scotchlok™ Insulated Butt Connectors. The completed splice is designed and tested for direct burial.

Kit Contents

Each kit contains sufficient quantities of the following materials to make one (1) splice, excluding inline connectors:

- One two-part translucent mold body with tongue and groove seams and built-in spacer webbing
- Scotchcast electrical insulating and sealing compound 2104 in convenient 3M™ Unipak™ container(s)
- Two pour spouts for kits 72-N1, 72-N2, and 72-N3; one top cap cover for kits 72-N4, 72-N5, and 72-N6
- Scotch™ 23 Tape for constructing sealing collars and sealing splice body ends
- One nonconductive abrasive cloth for preparing cable
- One bonding (jumper) wire with clips for providing solderless shield continuity on shielded cables (except 72-N1 kit)
- Instructions showing proper installation techniques for shielded and unshielded signal and control cables

Splice Features

- Versatility is designed into each kit to allow a wide range of cable sizes
- The 72-N2 through 72-N6 kits will accommodate shielded or unshielded cable. The 72-N1 kit is recommended for unshielded cable only



- Convenient kits simplify ordering and stocking
- Kits provide all materials needed to reinsulate, reconnect shield, and rejacket one splice
- Compound has low viscosity for fast, complete filling of splice
- Compound has low exotherm which will not damage plastic insulated cable
- Convenient Unipak container permits clean, easy compound handling
- Polypropylene mold with built-in spacer web automatically provides for cable centering and compound coverage
- No special tools required, normal hand tools only

Applications

To splice signal and control cables rated up to 1000 volts, sized 6.4–82.6 mm (0.25–3.25") O.D.

- For inline splicing of shielded or unshielded cables
- For use on plastic or rubber-jacketed cables
- For use on cables with plastic or rubber insulated conductors
- For use in direct burial applications
- For use with underground systems
 - Manhole
 - Handhole
 - Junction box
- For use in indoor applications
 - Vault
 - Cable tray
 - Junction box
 - Duct
- For joining of cable reel-ends
- For cable failures and dig-ins

Scotchcast 72-N series splicing kits can be used on cable that operates continuously at 90°C (194°F) and has an emergency overload temperature rating of 130°C (266°F). The splices are rated at 1000 volts.

Specifications

Product

Signal and control cable splices must be capable of normal continuous operation at 1000 volts. The splices must consist of a rigid polypropylene mold body with a built-in spacer web to automatically provide for cable centering and proper compound coverage; the mold body shall be filled with a flexible polyurethane electrical compound capable of continuous operation at 90°C (194°F), with an emergency overload temperature rating of 130°C (266°F).

Splices must have provisions for inline splicing of shielded or unshielded, plastic or rubber jacketed, plastic or rubber insulated, signal and control cables. The splices shall be rated for direct burial applications.

Engineering/Architectural

Splicing of all signal and control cables rated at 1000 volts or less and sized with an outside diameter of 6.4–82.6 mm (0.25–3.25") shall be performed in accordance with the instructions provided with Scotchcast 72-N series signal and control cable inline splicing kits.

Moisture-Resistance Test

Thermal cycling submerged in water pressurized to simulate a 1.8 m (6') head: Scotchcast 72-N series splice exceeds 1.0×10^6 ohms insulation resistance after ten temperature cycles of 2°C to 24°C (35°F to 75°F).

Splice Selection Guide

| Kit No. | Cable Diameter | | Scotchlok Insulated Butt Connectors | | | | | | | | | | | |
|---------|------------------|------------------|-------------------------------------|-----------|---------------------|-----------|-------------------|-----------|---------------------|-----------|-------------------|-----------|---------------------|-----------|
| | | | 18–22 AWG | | | | 14–16 AWG | | | | 10–12 AWG | | | |
| | | | MV18BC MN18BC | | | | MV14BC MN14BC | | | | MV10BC MN10BC | | | |
| | | | Shielded Cables** | | Unshielded Cables** | | Shielded Cables** | | Unshielded Cables** | | Shielded Cables** | | Unshielded Cables** | |
| | Min. | Max. | No. Cond. | No. Pairs | No. Cond. | No. Pairs | No. Cond. | No. Pairs | No. Cond. | No. Pairs | No. Cond. | No. Pairs | No. Cond. | No. Pairs |
| 72-N1 | 0.250" (6.4 mm) | 0.625" (15.9 mm) | — | — | 6 | 3 | — | — | 4 | 2 | — | — | 3 | — |
| 72-N2 | 0.500" (12.7 mm) | 1.000" (25.4 mm) | 18 | 9 | 32 | 16 | 12 | 6 | 19 | 9 | 8 | 4 | 13 | 6 |
| 72-N3 | 0.625" (15.9 mm) | 1.500" (38.1 mm) | 42 | 21 | 75 | 37 | 24 | 12 | 45 | 22 | 14 | 7 | 27 | 13 |
| 72-N4 | 1.000" (25.4 mm) | 2.000" (50.8 mm) | 74 | 37 | 160 | 80 | 50 | 25 | 90 | 45 | 40 | 20 | 60 | 30 |
| 72-N5 | 1.250" (31.8 mm) | 2.250" (57.2 mm) | 140 | 70 | 200 | 100 | 120 | 60 | 160 | 80 | 100 | 50 | 100 | 50 |
| 72-N6 | 1.250" (31.8 mm) | 3.250" (82.6 mm) | 360 | 180 | 400 | 200 | 220 | 110 | 250 | 125 | 180 | 90 | 200 | 100 |

*Not recommended for use on shielded cable.


**Figures based on IMSA cable specifications.

Typical Dimensions

| Kit No. | L (Inches) | D (Inches) |
|---------|------------------|------------------|
| 72-N1 | 7-1/8 (181 mm) | 1-1/2 (38 mm) |
| 72-N2 | 10-9/16 (268 mm) | 1-15/16 (49 mm) |
| 72-N3 | 15-7/16 (392 mm) | 2-1/2 (64 mm) |
| 72-N4 | 15-5/8 (397 mm) | 3-9/16 (90 mm) |
| 72-N5 | 20-5/16 (516 mm) | 4-3/4 (121 mm) |
| 72-N6 | 25 (635 mm) | 5-15/16 (151 mm) |



72-N1, 72-N2, 72-N3

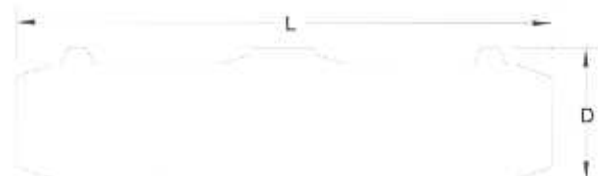

72-N4, 72-N5, 72-N6

Typical Properties

Scotchcast Electrical Insulating and Sealing Compound 2104

| Property | Test Method | Typical Value |
|--------------------------|---|--|
| Tensile Strength | ASTM-D-412 | 600 psi (4.14 MPa) |
| Elongation | ASTM-D-412 | 150% |
| Hardness | Shore A | 70 |
| Apparent Free Isocyanate | Distill 15 min. at 170°C (338°F) and 3mm mercury vacuum Distill 15 min. at 77°C (171°F) and 3mm mercury vacuum | 3.5% <.01% |
| Viscosity | Brookfield at 20 rpm | 1200 cps |
| Gel Time | 180 gm sample at 23°C (73°F) | 15 min. |
| Exotherm | 180 gm sample at 24°C (75°F) | 66°C max. (150°F max.) |
| Water Absorption | 7 days in 23°C water (73°F) | 0.28% |
| Insulation Resistance | Aged 28 days/35°C (95°F) | 5 x 10 ¹⁰ ohms |
| Dielectric Constant | ASTM-D-150 | 4.1 at 10 ³ 3.8 at 10 ⁶ |
| Dissipation Factor | ASTM-D-150 | 0.04 at 10 ³ Hz 0.05 at 10 ⁶ Hz |
| Hydrolytic Stability | 7 days in water at 100°C (212°F) | +2.4% -10 points Shore A hardness |
| Dry Heat Aging | 21 days at 132°C (270°F) | -4.7% wt. loss + 10 Shore A |
| Copper Corrosion | 30 days at 35°C (95°F) 96% rel. hum. under 45 V | 0 |
| Stress Cracking | On cut and stressed polyethylene for 48 hrs/49°C (120°F) | 0 |
| Fungus Resistance | ASTM-G-21 | 0 |

Installation Techniques

The exact instructions for constructing each splice are packed in each kit. The following summarizes these instructions:

1. Prepare cable to dimension "A" for splice opening, removing shielding and core wrapper according to steps for shielded cable or unshielded cable, as applicable.
2. Install Scotchlok insulated butt connectors, not provided, staggering individually or in pairs. Observe color coding.
3. Install jumper bonding wire to shielded cables; construct sealing collars with Scotch 23 tape provided.
4. Trim mold body ends to fit cable and install over splice.
5. Seal mold ends with Scotch 23 tape provided.
6. Install pour spouts into kits 72-N1, 72-N2, and 72-N3.
7. Mix 2104 compound and pour into splice body, filling completely. Allow compound to cure.

Maintenance

The components within this kit are stable under normal storage conditions. Normal storage and stock rotation are recommended.

Scotchcast 2104 compound is not impaired by freezing; however, it should be warmed to 0°C (32°F) before being mixed and poured.

Availability

Scotchcast 72-N series signal and control cable inline splicing kits are available in six sizes from your electrical distributor. The kits will splice signal and control cables sized 6.4–82.6 mm (0.25–3.25") outside diameter, as shown in the splice selection guide table.

3M, Scotchcast, Scotchlok, Unipak, and Scotch are registered trademarks of 3M.

Important Notice

All statements, technical information and recommendations related to the Seller's products are based on information believed to be reliable; but the accuracy or completeness thereof is not guaranteed. Before utilizing the product, the user should determine the suitability of the product for its intended use. The user assumes all risks and liability whatsoever in connection with such use.

All statements or recommendations of the seller which are not contained in the Seller's current publications shall have no force or effect unless contained in an agreement signed by an authorized officer of

the Seller. The statements contained herein are made in lieu of all warranties express or implied, including but not limited to the implied warranties of merchantability and fitness for a particular purpose which warranties are hereby expressly disclaimed.

SELLER SHALL NOT BE LIABLE TO THE USER OR ANY OTHER PERSON UNDER ANY LEGAL THEORY, INCLUDING BUT NOT LIMITED TO NEGLIGENCE OR STRICT LIABILITY, FOR ANY INJURY OR FOR ANY DIRECT OR CONSEQUENTIAL DAMAGES SUSTAINED OR INCURRED BY REASON OF THE USE OF ANY OF THE SELLER'S PRODUCTS THAT WERE DEFECTIVE.



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582