

Industrial Glands

CW Brass Gland with Integral Earth 419CE Series



Application

- > For steel wire armour cable

Features & Benefits

- > Brass indoor and outdoor cable gland with earth bonding connection
- > Suitable for circular galvanised steel single wire armoured, plastic or rubber sheathed cables
- > Outer seal grips sheath of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring
- > Accessories available separately

Technical Data


- > EN50262
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > Integral earth connection complies with GDCD 190 Category A (43.3kA for 1 second)



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK



CW Brass Gland with Integral Earth 419CE Series

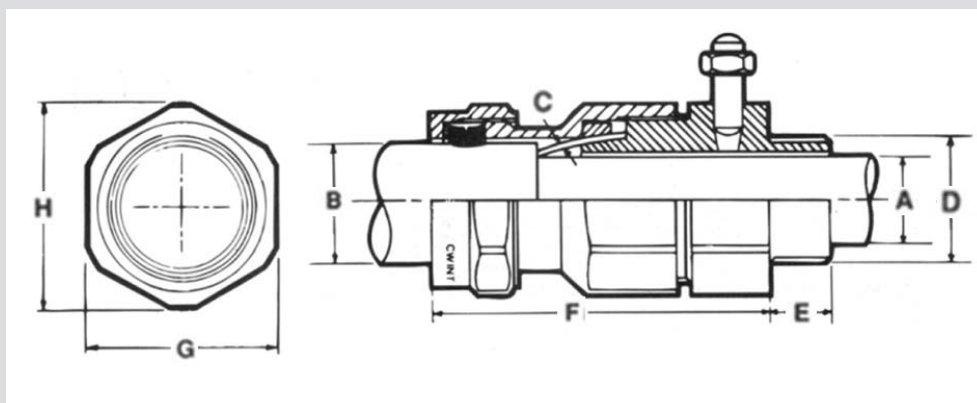

Gland Details

Cable dimensions accommodated mm					Gland Reference		Glands dimension mm					Accessories
Diameter		Armour wire diameter		C	Size	Design Number	Entry thread		Approx. length from shoulder	Hexagon size		Brass backnut
Under armour A	Overall B						Size	Length		Across flats	Across corners	
Min	Max	Min	Max				D	E	F	G	H	Design number
-	11.6	8.0	15.8	0.9/1.25	20S	419CE-52	M20 × 1.5	10	56	30.5	34.0	429AA-53
-	13.9	11.7	20.8	0.9/1.25	20	419CE-53	M20 × 1.5	10	56	30.5	34.0	429AA-53
-	19.9	17.0	27.2	1.25/1.6	25	419CE-55	M25 × 1.5	10	63	42.4	48.0	429AA-55
-	26.2	23.5	33.5	1.6/2.0	32	419CE-56	M32 × 1.5	10	73	56.4	61.5	429AA-56
-	32.1	29.0	39.9	1.6/2.0	40	419CE-57	M40 × 1.5	15	77	56.4	61.5	429AA-57
-	44.0	39.5	52.6	2.0/2.5	50	419CE-59	M50 × 1.5	15	84	70.1	77.2	429AA-59
-	55.9	51.3	65.3	2.5	63	419CE-61	M63 × 1.5	15	84	90.1	100.0	429AA-61
-	67.9	62.5	78.0	2.5	75	419CE-63	M75 × 1.5	15	94	106.2	117.0	429AA-63
-	74.0	68.0	88.0	3.15	85	419CE-64	M85 × 2	20	125	115.0	126.0	429AA-64



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

