


# Multiway Service Heads

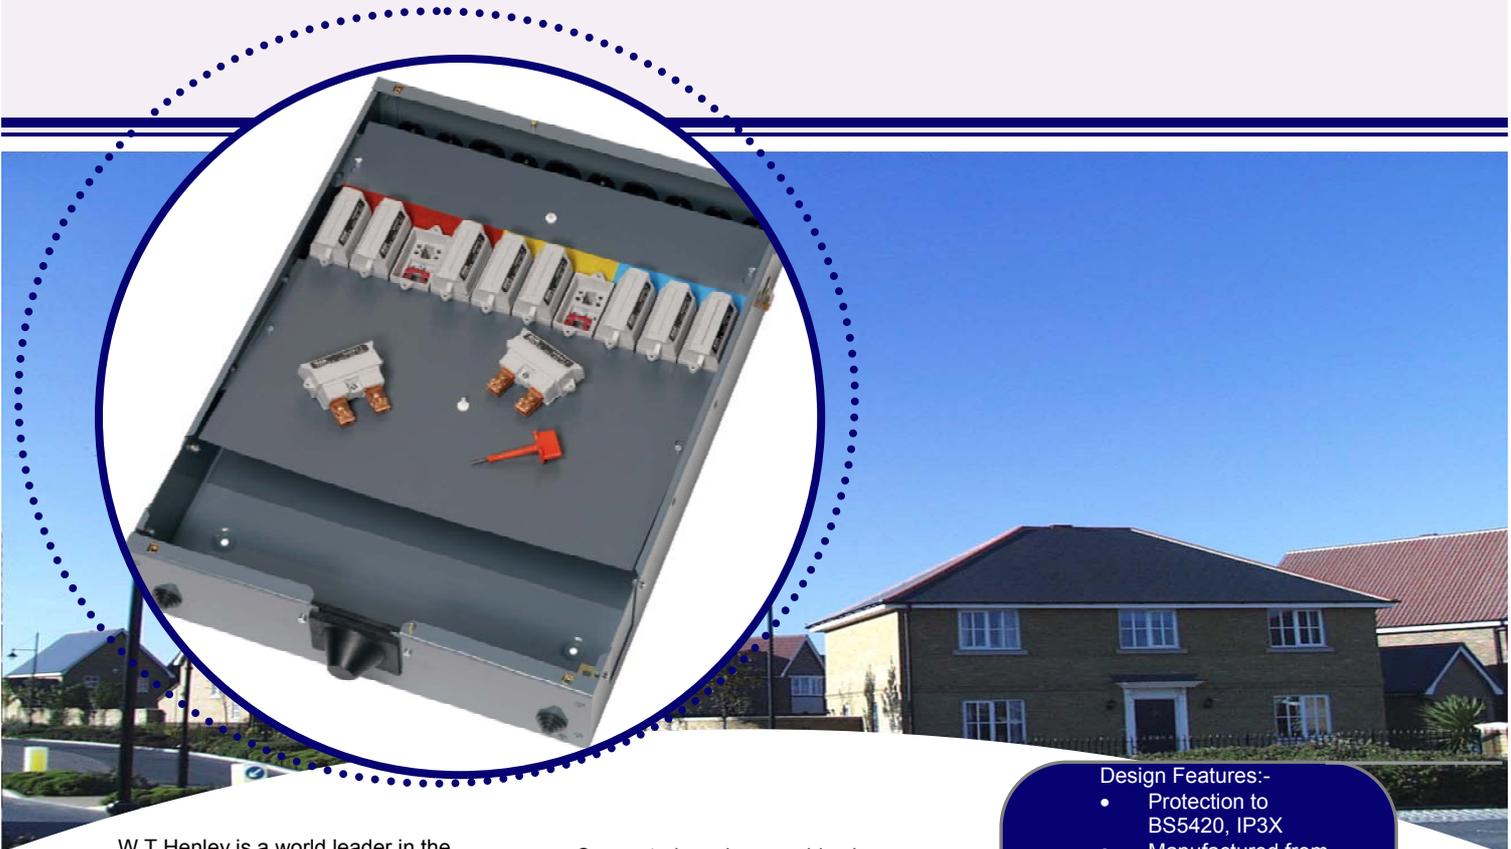

W T Henley is a world leader in the design and manufacture of Electrical Distribution Equipment

Safe and reliable service fuse protection is essential in maintaining consumer supplies. The well-known Series 7 Cutout is the favoured choice by many utilities around the world.

A simple, safe and cost effective means of providing supply/isolation facility to multi-occupied dwellings (for example a block of flats) is the W T Henley Multiway Service Head.

Suiting SNE or CNE cables, all service fuses are mounted in one horizontal bank for safe easy cabling. Additional security is provided by a PVC shroud over live metal, ensuring safety during sub-circuit wiring.

Hexagon headed wrench to operate socket-headed screws in cutouts can be supplied when requested

Suggested maximum cable sizes:

- 7 and 10way = 120mm<sup>2</sup> ;
- 16way = 185mm<sup>2</sup>;
- 24way = 300mm<sup>2</sup>.

If larger cables are to be accommodated we will be pleased to advise.

Looped mains incoming cables can be accommodated using an extra entry bush.

**Please note:** *Separate neutral/earth bars are fitted with a neutral/earth link for CNE systems. The link must be removed for SNE Systems. Additional accessories may be required for the connection of armour on the metal sheaths of paper-insulated cables. Further information is available on request.*

*Two external earthing bolts are mounted on an extension earth bar, to allow for multiple earthing points.*

#### Design Features:-

- Protection to BS5420, IP3X
- Manufactured from 1.6mm zinc coated steel.
- All incoming live metal is shrouded ensuring safety during sub circuit wiring.
- Choice of 7, 10, 16 & 24 way units.
- Suitable for CNE or SNE cable applications.
- Fitted with "Series 7", Single Pole Fused Cutouts.
- Accepts BS1361 Fuselinks.
- Option for mechanical type connectors on incoming cable

## Product selection chart



<b>Rating (Amps)</b>	<b>No of ways</b>	<b>Product Code</b>
60/80	7	55221-37
100	7	55221-63
60/80	10	55222-30
100	10	55222-69
60/80	16	55223-20
100	16	55223-53
60/80	24	55224-01
100	24	55224-02

*Note:- For fixing of cable lugs, use M12 nuts, bolts and washers for 7 & 10 way units. M16 for 16 & 24 way.*

### Outgoing Cable Arrangements

Two sizes of bush are supplied fitted in the top plate  
Small bushes take polymeric single phase service cables up to 35mm<sup>2</sup>.  
Larger bushes are featured for three core polymeric cables up to 35mm

*Cutout fuselinks to BS1361 available upon request.*

***NOTE:- Consumer load must not exceed the maximum rated capacity of the mains cable installed.***



WWW.CABLEJOINTS.CO.UK  
**THORNE & DERRICK UK**  
 TEL 0044 191 490 1547 FAX 0044 477 5371  
 TEL 0044 117 977 4647 FAX 0044 977 5582  
 WWW.THORNEANDDERRICK.CO.UK



General Note The equipment detailed in this publication should be installed by a suitably qualified person. WT Henley Limited reserves the right to make changes in product specification without notice or liability. All information is subject to WT Henley's own data and is considered accurate at time of going to print.

A subsidiary of TT electronics plc

© 2004 WT Henley Limited. All rights reserved. No part of this document may be copied or reproduced in whole or in part without prior written approval of WT Henley Limited.

TDS 0044 Issue 1. 02.04