



Certifications

Approved by ERDF

Section

MV Multifunction

Application

Field
Laboratory



PRODUCT BENEFITS

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 40 mm
0,630 - 1,575 inch

Outer sheath and insulation thickness capacity 7 mm / 0,275 mm


TOOL DIMENSIONS

Length	150 mm
Width	80 mm
Height	100 mm
Weight without box	1,24 Kg
Packaging	None

Multifunction tool for outer sheath and insulation

TO DO WHAT

The MF2/40 enables the user to :
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut
Set the length and remove thicker insulation with a straight and neat cut

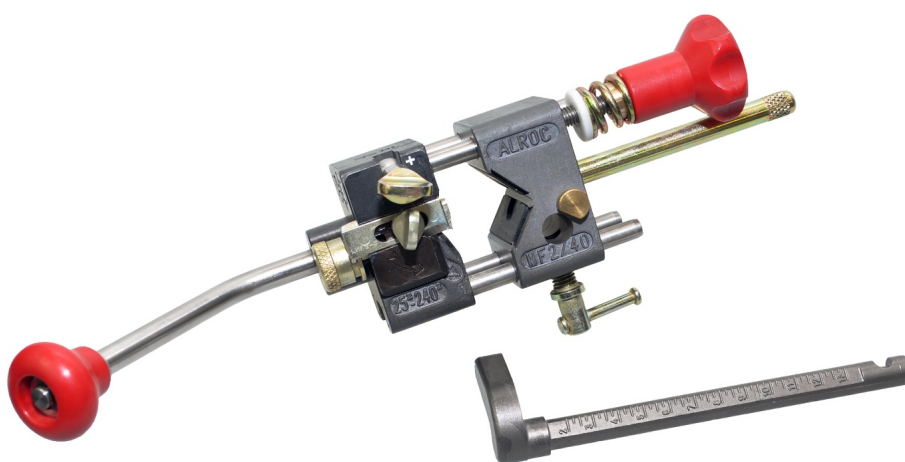

Spare part

- KIT-MF3/40 - Protective wear pads
- LMF2 - Spare blade for primary insulation
- BR - Thrust to set the length of insulation to be remove
- VBB1 - Screw for locking the thrust
- PCR - Quick set up right angled 45° handle
- 196855 - Straight handle M10
- 108098 - Clamping knob for blade

Associated tool

- MF1+/25 - Multifunction tool for bonded semiconductor
- SRC - Scoring stylus for peelable semiconductor with chamfer



MF2/40



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Outer sheath and insulation thickness capacity	Length	Width	Height		
MF2/40	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 mm	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/40-S	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/60	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 mm	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	
MF2/60-S	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	