


Sign Mounting Brack-its™

- Stainless Steel
- Ribbed for extra strength
- With or without bolts
- Bolts supplied with fibre washers
- Threaded holes - no nuts required



UL 4000 Battery
Operated Tool
See page 12 for details

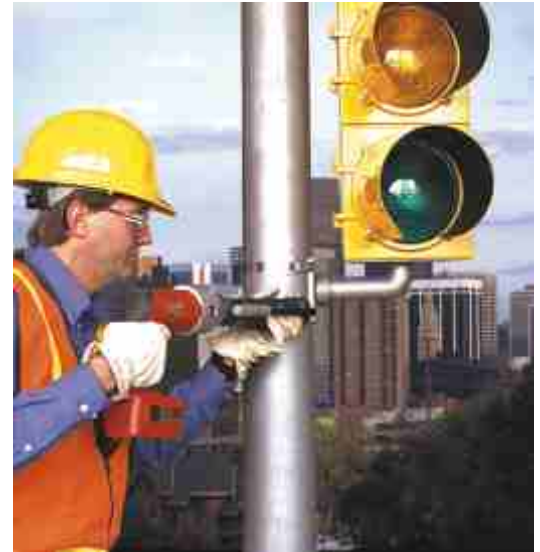

1 Bolt Straight Leg Brack-it Thickness .070" (1.8mm) Pkg. Qty. 50

Cat. No.	Description	Weight	
		Lbs.	Kgs.
D001	Stainless Steel with S.S. Bolt, Washer and Fibre washer	7.3	3.3
D004	Stainless Steel, no Bolt or washer	5.9	2.7

For band widths up to 3/4" (19.05mm)



D001, D004

1 Bolt Flared Leg Brack-it Thickness .070" (1.8mm) Pkg. Qty. 50

Cat. No.	Description	Weight	
		Lbs.	Kgs.
D021	Stainless Steel with S.S. Bolt, and Washer	7.6	3.5
D022	Stainless Steel, no Bolt or washer	6.0	2.7

For band widths up to 3/4" (19.05mm)



D021, D022

2 Bolt Brack-it Thickness .070" (1.8mm) Pkg. Qty 50

Cat. No.	Description	Weight	
		Lbs.	Kgs.
D008	Stainless Steel with S.S. Bolt, Washer and Fibre washer	9.6	4.4
D009	Stainless Steel, no Bolts or washers	7.1	3.2

For band widths up to 3/4" (19.05mm)



D008, D009

Bolts and Washers for Brack-its Pkg. Qty 50

Cat. No.	Description	Weight	
		Lbs.	Kgs.
D002	S.S. Bolts for Stainless Brack-its M8 x 20 Long Hex Head	1.25	0.57
D003	Fibre washers	0.06	0.03

Mini Brack-its Stainless Steel Pkg. Qty 50

Cat. No.	Description	Weight	
		Lbs.	Kgs.
D310	Flared Leg with SS Bolt, Fibre Washer, 1/2" (12.7mm) Slot	3.20	1.50
D315	Straight Leg with SS Bolt, Fibre Washer, 1/2" (12.7mm) Slot	3.30	1.50
D302	Replacement Bolts - SS Bolt M8 x 12 Hex head	0.75	0.34

For band widths up to 1/2" (12.7mm)



D310



D315

For Ultra-Lok sign clamping system refer to page 12