

Explosion Proof Glands

BARR-X EEx d IIC Brass Barrier Gland 424TX Series



Application

- > For wire braided cables

Features & Benefits


- > Brass indoor and outdoor cable gland for use in Zone 1 and Zone 2 hazardous areas
- > Suitable for circular, wire braid armour cables with extruded polymeric oversheath and extruded or taped bedding
- > Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- > Provides mechanical cable retention and electrical continuity through the braid wire termination
- > Suitable for most climatic conditions – weatherproof & waterproof
- > Nickel plated versions also available
- > Matching accessory kits available



Technical Data

- > Certified II 2GD, EEx e II & EEx d IIC under ATEX directive 94/9/EC.
- > Certificate number Sira04ATEX1080X.
- > Service temperature range -60°C to +90°C.
- > May be used in:
 - Zones 0, 1 & 2 with EEx ia IIA, B & C equipment
 - Zones 1 & 2 with EEx ib IIA, B & C equipment
 - Zones 1 & 2 with EEx d IIA, B & C equipment with any volume
 - Zones 1 & 2 with EEx e II equipment
 - Zones 1 & 2 with EEx p II equipment
 - Zone 2 with EEx nA II equipment
 - Zone 2 with EEx nR II equipment
 - Zones 21 & 22 with EEx tD II equipment

BARR-X EEx d IIC Brass Barrier Gland

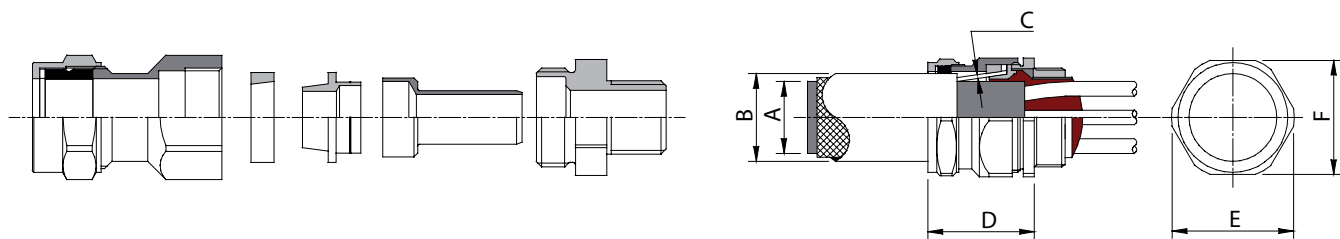

Gland Details

Gland References & Thread Sizes					Cable Dimensions mm							Gland Dimensions mm		
Basic Size	Metric		NPT		Max. Dia. Over Conductors	Max. No. of Conductors	Inner Sheath Dia. 'A'		Overall Dia. 'B'		Braid Wire Dia. 'C'	Approx. Length 'D'	Hexagon Size	
	Design No.	Thread Size *	Design No.	Thread Size †			Min	Max	Min	Max			A/C 'E'	A/F 'F'
20S	424TX52	M20 × 1.5	424TX02	½" - 14 NPT	11.0	30	—	11.5	8.0	15.8	0.2 / 0.3	67	34.0	30.5
20	424TX53	M20 × 1.5	424TX03	½" - 14 NPT	11.0	30	—	12.5	11.7	20.8	0.2 / 0.3	64	34.0	30.5
25	424TX55	M25 × 1.5	424TX05	¾" - 14 NPT	16.0	42	11.5	18.0	17.0	27.2	0.2 / 0.45	65	42.2	37.6
32	424TX56	M32 × 1.5	424TX06	1" - 11½ NPT	22.1	60	17.0	25.0	19.0	33.5	0.3 / 0.45	77	53.6	47.3
40	424TX57	M40 × 1.5	424TX07	1¼" - 11½ NPT	28.2	100	24.0	31.5	26.5	39.9	0.3 / 0.45	77	61.5	56.4
50	424TX59	M50 × 1.5	424TX09	2" - 11½ NPT	37.1	200	30.0	41.5	36.0	52.6	0.3 / 0.45	84	77.2	70.1
63	424TX61	M63 × 1.5	424TX11	2½" - 8 NPT	48.4	400	40.0	54.0	46.5	65.3	0.3 / 0.45	90	87.4	80.0
75	424TX63	M75 × 1.5	424TX13	3" - 8 NPT	58.6	400	53.0	65.5	58.0	78.0	0.3 / 0.45	96	109.2	98.8
85	424TX64	M85 × 2	424TX14	3" - 8 NPT	65.8	400	60.0	74.0	68.0	88.0	0.3 / 0.45	108	126.0	115.0



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk

Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 977 5582

