

BS6622/BS7835 Three Core Armoured 6.6kV XLPE Stranded Copper Conductors

CABLE CHARACTERISTICS



Bending radius $r=12D$

CABLE DESCRIPTION

1.CONDUCTOR

Compact circular stranded copper conductor complying with BS6360 Class 2.

CONDUCTOR SCREEN

Extruded semi-conducting compound bonded to the insulation and applied in the same operation as the insulation.

2.INSULATION

Extruded cross-linked polyethylene (XLPE) suitable for operation at a conductor temperature of 90°C.

3.INSULATION SCREEN

Extruded semi-conducting compound applied in the same operation as the insulation. Cold strippable screens are supplied as a standard but fully bonded screens may be provided if specified.

4.METALLIC SCREEN

Copper tapes applied overlapped to provide an earth fault current path.

5.LAYING UP

Three cores laid up with polypropylene string fillers to form a compact circular cable, and bound with tape.

6.TAPE BINDER

7.SHEATH


Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified.

8.ARMOURING

Single layer of galvanised circular steel wires.

9.OVERSHEATH

Extruded black polyvinyl chloride (PVC) or Low Smoke Zero Halogen (LSOH) compound is supplied as standard. Alternative materials may be provided if specified e.g medium density polyethylene (MDPE).

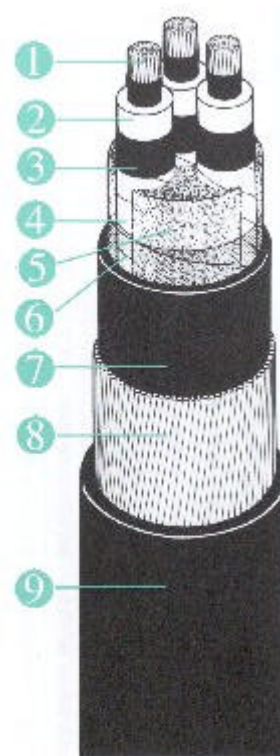

BS6622/BS7835 Three Core Armoured 6.6kV XLPE Stranded Copper Conductors

Constructional Data

Cross-sectional area mm ²	Minimum average thickness of insulation mm	Nominal diameter over insulation mm	Nominal thickness of PVC/LSOH bedding mm	Nominal number and diameter of armoured wires no./mm	Nominal thickness of PVC/LSOH oversheath mm	Nominal overall diameter of cable mm
70	2.5	16.8	1.3	49/2.5	2.6	52.4
95	2.5	18.5	1.4	54/2.5	2.7	56.5
120	2.5	20.0	1.5	57/2.5	2.8	60.1
150	2.5	21.3	1.5	60/2.5	2.9	63.1
185	2.5	23.1	1.6	65/2.5	3	67.4
240	2.6	25.5	1.7	71/2.5	3.2	73.2
300	2.8	28.3	1.8	62/3.15	3.5	81.3
400	3.0	31.4	2.0	69/3.15	3.7	88.8

Installation Data

Cross-sectional area mm ²	Approximate cable weight kg/m	Nominal drum length m	Minimum bending radius mm	Nominal internal diameter of ducts mm
70	5.8	750	650	100
95	6.9	500	700	100
120	7.9	500	750	100
150	8.9	500	800	100
185	10.4	450	850	125
240	12.7	400	900	125
300	16.0	400	1000	125
400	19.4	350	1100	125

Electrical Data

Cross-sectional area mm ²	Maximum DC resistance of conductor at 20°C μOhms/m	Maximum AC resistance of conductor at 90°C μOhms/m	Reactance at 50Hz μOhms/m	Impedance at 50Hz μOhms/m	Maximum capacitance pF/m	Maximum charging current at normal voltage and frequency mA/m
70	268	343	102	358	383	0.46
95	193	248	96.2	266	432	0.52
120	153	196	93.1	217	474	0.57
150	124	159	90.8	183	511	0.61
185	99.1	128	88.1	155	562	0.67
240	75.4	98	85.9	130	602	0.72
300	60.1	80	84.7	117	622	0.75
400	47.0	64	83.2	105	648	0.78

BS6622/BS7835 Three Core Armoured 6.6kV XLPE Stranded Copper Conductors

Ratings Data

Cross-sectional area mm ²	Current Ratings			Short circuit ratings	
	Laid direct in ground	Drawn into ducts	Laid in air	One second short circuit rating of conductor kA	One second short circuit rating of copper tape screen per core kA
Amps	Amps	Amps			
70	255	215	270	9.8	-
95	300	255	330	13.3	Typically
120	340	290	375	17.2	Less
150	380	330	430	21.2	Then
185	430	370	490	26.6	1kA
240	490	425	570	34.9	-
300	540	470	650	43.8	-
400	590	520	700	57.3	-

Current Ratings Conditions:

Ground Temperature	15°C
Ambient temperature (air)	25°C
Depth of burial	0.8m
Thermal resistance of soil	1.2°C m/W



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

