



The *World* of Electrical safety

CATUTM

T&D

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582



2009 - 2010



First and largest european specialist in Electrical safety equipment

CATU was created in 1919 and, since the beginning, it has dedicated its activity to the manufacture of material and equipment for electricity networks and installations.

Since 1936, CATU's activity has been concentrated on equipment for personal protection against electrical hazards and accordingly, has now 70 years experience in this field.

After the end of World War II, many French companies involved in Production, Transmission and Distribution of Electrical Energy were amalgamated into one National Company, called "Electricité de France" (EDF).

A short time later, a central department for Safety and Prevention of Accidents was created within EDF. Because of the experience that CATU already had in this field, a very close cooperation was forged between EDF and CATU which resulted in joint development and improvement of all the important Safety Material and Equipment now used in France.

The international recognition gained by EDF in this field has contributed to giving CATU a foremost position at the World Wide level.

At the present time, CATU Safety Equipment, including all the range of short-circuiting and earthing systems, the DETEXTM voltage detectors and testers, the live working tools and the individual equipment for linesmen, is used by the Main Power Utilities, Electrical Contractors, Large Industries and Railways in about 100 countries spread over the 5 continents.

CATU's experience and level of investment and research is unmatched. As a member of the main national and international technical committees (such as UTE, CENELEC, IEC and ASTM), CATU is contributing to the development and application of the latest technologies. This quest for continuous improvement is now reinforced with the ISO 9001 Quality Insurance Certification.

Our endeavours to be the Specialist in Electrical Safety Equipment are made with genuine dedication to all aspects of Safety Engineering Principles. Together with our network of distributors, we acknowledge our commitment and obligations to our customers.

CATU is a Group Sicame Company

www.catuelec.com



CONTENTS



General Products index	4	Golden rules	10
General References index	6	Personnal Protective Equipment (PPE) specifications	12
IEC Standard	9		

Low voltage

Below 1 000 V

Equipment guide	14	Installation testers	32
		- insulation tester	32
Personal protective equipment	18	- installation testers identifier	33
- head and eyes protection	18	- multimeter clamp-meter	35
- insulating rubber gloves	20	- infrared thermometer	36
- insulating mats and boots	23	Short-circuiting and earthing systems	37
Safety padlocks and warning signs	25	- for bare overhead lines	37
- padlocks	25	- for insulated overhead lines	38
- warning signs and delineators	27	- for consumer units	39
- self adhesive warning signs	28	- ISOSTOP™ system	39
Voltage detectors and testers	29	- jumper systems	40
- 6 to 690 V detectors and testers	29	- mini jumper clamps	41
- voltage detectors accessories	31	Bimaterial insulated tools	43
		Insulated tools	46

Medium voltage

From 1 kV to 52 kV

Equipment guide	58	Voltage detectors	86
		- IEC electronic voltage detectors	86
Personal protective equipment	62	- standard electronic voltage detectors	87
- head and eyes protection	62	- insulating sticks	88
- insulating rubber gloves	64	- phase comparators	89
- insulating mats and platforms	67	- wireless phase comparators	91
- arc flash equipment	68	Short-circuiting and earthing systems	92
- equipment for working on pole	69	- cables	92
- padlocks	73	- IEC overhead lines systems (work from pole)	93
Substation equipment	74	- clamps and accessories	94
- padlocks, warning signs and delineators	74	- over head line system (work from ground)	95
- safety equipment	78	- insulating sticks	96
- IEC short-circuiting and earthing systems	80	- disconnect and measuring sticks	98
- clamps and earth clamps	81	- underground systems	98
- insulating sticks	82	General tools	100
- special short-circuiting and earthing systems (for 200 and 400 A separable connectors)	83	- sticks accessories	100
- voltage detectors and indicators	84	- tensionning equipment	101
- life saving kits	85	- handling and uncoiling blocks	103
		Earth rods	104
		- earth rods and connectors	104
		- earthing clip and earth tester	105

High voltage

Above 52 kV

Equipment guide	108	Voltage detectors	123
		- electronic voltage detectors	123
Personal protective equipment	110	- insulating sticks	124
- head and eyes protection	110	Short-circuiting and earthing systems	125
- insulating rubber gloves	112	- HV and EHV clamps	125
- insulating mats and boots	114	- insulating sticks	126
- equipment for working on pole	115	- earth clamps	126
Safety padlocks and warning signs	119	- fixed points and cables	127
- padlocks	119	- accessories	128
- warning signs	121		
- delineators	122		
- HF voltage comparator	122		

A

Adhesive tape (safety)	27
Adaptors for insulating sticks	99
Adjustable spanner (insulated tools)	51
Anti-fall grip	69/115
Anti-fall device	71/117
Arc flash equipment	68

B

Bags	
- For tools	55
- Carrying for rubber gloves	22/66/113
- For earthing systems	128
- For insulated sticks	96/98
- For insulating mats	23/67
Bent snipe nose pliers (insulated tools)	44/47
Bimaterial insulated tool set	45
Blocks	
- Opening	103
- Uncoiling	103
Boots, insulating	24/67
Boundary post	27/77/122
Brushes	
- For conductors	100
- Cleaning	100

C

Cable cutters (insulated tools)	44/48/49
Cable launcher projector	128
Cables	
- Copper for earthing systems	92/127
- Aluminium for earthing systems	92/127
Chain delineator	27/77/122
Clamps, short-circuiting systems	
- Medium Voltage	
. For installations and substations	81
. Automatic	93
- High voltage	
. Manoeuvrable by insulating sticks	125
. Rope operated	128
Clamp dispenser heads	94
Climbers	
- For wooden poles	72
- For rectangular shaped concrete poles	72
- For round and hexagonal concrete poles	72
- For H profile pole	72
Come-along	
- Automatic clamp	101
- Adjustment	101
- Parallel jaws	102
Combination wrench (insulated tools)	51
Comparator, single pole	90
Comparators, two poles phase	89/90
Comparator, wireless	91/122
Connector with stick adapter	71
Connectors for earth rods	104
Constraint tie	71/117
Covers for insulating sticks	96
Cranked ring wrench (insulated tools)	52
Crocodile clamps (safety)	31

D

Delineators	27/77
Descent device	69/115
Diameter gauge	100
Digital clamp meter	35
Digital multimeter	35

E

Earth clamps, High Voltage	126
Earth clamps, Medium voltage	81
Earth rod for low voltage earthing systems	38
Earth rods for medium voltage	94
Earthing clip	105
Earthing systems	94
Earth rods	104
Earthing systems	
- Low voltage	
. For overhead lines	37/38
- Medium Voltage	
. For overhead lines IEC	93
. For overhead lines	95
. For substations IEC	80
. For underground cables	98
- High Voltage	
. High voltage systems	125/126
Electrician's scissors	50
Electrician's suit	24
End cutting pliers (insulated tools)	48

F

Face shield	18/62/110
Fall arrester	70/116
Fixing tools for warning signs	27
Fixed points	
- Medium Voltage	81
- High Voltage	127
Flags, warning	77/122
Flat nose pliers (insulated tools)	44/47
Frontal ratchet cable cutter	49
Fuse holder for substation	78
Fuse puller	98/100

G

Glasses	
- Safety glasses	18/62/110
- Safety overglasses	18/62/110
Gloves	
- Insulating rubber gloves	20/64/112
- Overgloves	22/66/112
- Undergloves	22/66/112
- Working gloves	22/66/112
Gloves storage box	24/66/113
Gloves tester	21/65/113
Guying equipment	103

H

Hacksaw (insulated tools)	49
Handle for padlocks	24/74/120
Harness	
- Full body fall arrest	69/115
- Pro electric full body fall arrest	69/115
Headlamps	
- With adjustable focus	19/63/111
- With leds	19/63/111
- Atex with leds	19/63/79/111
Helmets	
- ABS	18/62/110
- Polycarbonate	18/62/110
Hexagonal spanner (insulated tools)	52
HF voltage comparators	91/122
Hooks	
- Manoeuvring	100
- Pig tail	100

I

Indicator phase rotation, low voltage	30
Indicators	
- Permanent luminous	83
- Permanent for medium voltage cubicles	84
Infrared thermometer	36
Insulated tools	
- Bimaterial insulated tools	43
- Bimaterial insulated tools kits	45
- Insulated tools	46
- Insulated tools kits	55
Insulating mats	
- Low voltage	23
- Medium voltage	67
- High voltage	114
Insulating platforms	
- Medium Voltage	67
- High Voltage	114
Insulating sticks	
- Medium voltage	
. Clampsticks	82/97
. Disconnect telescopic	97
. For substation short-circuiting systems	82
. For overhead lines short circuiting systems	96
. For voltage detectors	88
. Rescue stick	82
- High Voltage	
. For short-circuiting systems	126
. For voltage detectors	124
. Rescue sticks	114
Intervention kit (substation equipment)	78
(for electricians)	56

J

Jumper cables with clamps	41
Jumper cables with threaded ferrules	41
Jumper cables with insulated clamps	42
Jumper connecting box	42

General products index



K

Kits	
- Intervention for substations	.78
- Insulated tools	.45/55
- For working on pole	.71

L

Ladders	.72/118
Lamp, safety for substations	.79
Lanyard	.70
Life saving kits for substations	.85
Long nose pliers (insulated tools)	.47
Lockout for single pole breaker	.26
Lockout with padlock for single pole breaker	.26
Low voltage complete set	.56

M

Markers	.25/74/120
Mats, insulating	.23/67/114
Mechanical adjusters	.102
Mini jumper clamps	.41
Mittens	.22/66
Mobile safety line	.70/116
Multimeter	.35

O

Open end spanner (insulated tools)	.52
------------------------------------	-----

P

Padlocks, safety	.25/73/119
Phase tester insulated screwdriver	.46
Platform, insulating	
- Medium Voltage	.67
- High Voltage	.114
Plug pliers (insulated tools)	.44
Probes	
- Contact probes for L.V testers	.31
- Safety test probes for voltage detectors	.31
- Safety test probes for multimeter	.35
Pruning saw	.100

R

Ratchet cable cutter (insulated tools)	.49
Ratchet lift-chain hoist	.103
Reel launcher	.128
Rescue sticks	
- Medium voltage	.82
- High voltage	.114
Right angle hexagonal key wrench (insulated tools)	.51
Rope	
- Safety	.70
- Straps with lever stretcher	.69/115
- With a tension device	.70/116
- With energy absorber	.69/115
Round nose pliers (insulated tools)	.44/47
Reversible hexagonal ratchet handle	.51

S

Screwdrivers (insulated tools)	.43/46
Short-Circuiting Systems	
- Low voltage	
. For bare conductors	.37
. For insulated conductors	.38
. For consumer units	.39
. Isostop system	.39
. Equipment for consumer units	.40
- Medium Voltage	
. For overhead lines IEC	.93
. For substations IEC	.80
. For underground cables	.98
- High Voltage	
. High voltage systems	.125/126
Shunt telescopic probe	.42
Side cutters (insulated tools)	.44/48
Snap hooks	.70/71/116
Sockets 3/8" long series (insulated tools)	.54
Sockets 3/8" U.S standard (insulated tools)	.54
Sockets 6 sided Male (insulated tools)	.54
Sockets wrench set (insulated tools)	.53
Spade cable	.98
Static discharge stick	.97
Stepladders, insulating	.23
Stick case	.124
Sticks, Insulating	
- Medium voltage	
. Clampsticks	.82
. Disconnect telescopic	.97
. Measuring telescopic	.97
. For substation short-circuiting systems	.82
. For overhead lines short circuiting systems	.96
. For voltage detectors	.88
High Voltage	
. For short circuiting systems	.126
. For voltage detectors	.124
Stripping pliers (insulated tools)	.50
Stripping knives (insulated tools)	.50

T

Tap off box	.42
Testers, Low Voltage	
- For electrical installations	.33
- For voltage	.29/30
- Earth tester	.34/105
- For insulation	.32
Threaded adapter	.42
Testing device for phase comparator	.89
Tether rope	.69/115
Torch safe light	.79
Torque wrench 3/8", insulated	.54
Trimmer	.100

U

Universal pliers (insulated tools)	.44/47
------------------------------------	--------

V

Voltage detector for permanent indicators	.83/84
Voltage detectors	
- Low voltage	
. Multi-tester	.29
. With phase rotation	.30
- Medium voltage	
. Indoor use	.83
. Compact serie	.83
. For separable connectors	.83
. Electronic IEC	.86
. Electronic standard	.87
- High voltage	
. Electronic	.123

W

Wall mounted supports	.82
Warning signs	
- Self adhesive	.28/75
- Low voltage	.27
- Medium voltage	.76
- High voltage	.121
Waterpump pliers (insulated tools)	.44/48
Winches	.102
Wire stripping pliers (insulated tools)	.44/50
Wireless phase comparator	.91/122
Working on pole kits	.71/117

General references index

References	Pages
AC-21	27
AC-44	27
AD-01	27
AL-138	27
AL-200	26/74/120
AL-201/1	26
AL-201-C/1	26
AL-202	26/74/120
AL-205	26
AL-207/10	26/74/120
AL-207/30	26/74/120
AL-230	56
AL-230-(*)-EX	25/73/119
AL-230-S-(*)-EX	25/73/119
AL-230-S-Z-EX	25/73/119
AL-230-Z-EX	25/73/119
AL-236-111-EX	26/74/120
AL-236-222-EX	26/74/120
AL-236-S-111-EX	26/74/120
AL-236-S-222-EX	26/74/120
AL-240-B-00-EX	25/73/119
AL-240-B-Z-EX	25/73/119
AL-240-BL-00-EX	25/73/119
AL-240-BL-Z-EX	25/73/119
AL-240-J-00-EX	25/73/119
AL-240-J-Z-EX	25/73/119
AL-240-B-00-EX	25/73/119
AL-240-S-B-00-EX	25/73/119
AL-240-S-BL-00-EX	25/73/119
AL-240-S-J-00-EX	25/73/119
AL-240-S-V-00-EX	25/73/119
AL-240-V-00-EX	25/73/119
AL-240-V-Z-EX	25/73/119
AL-240-B-Z-EX	25/73/119
AL-240-(*)-EX	25/73/119
AL-240-S-(*)-EX	25/73/119
AL-240-S-Z-EX	25/73/119
AL-240-Z-EX	25/73/119
AL-31	27/77/122
AL-31/05	27/77/122
AL-31/25	27/77/122
AL-316	27/77/122
AL-318	27/77/122
AL-32/05	27/77/122
AL-53	77/122
AL-58	77/122
AL-60	77/122
AL-62-A	27/77/122
AL-63-A	27/77/122
AM-20-GB	27/76/121
AM-20-RM	76/121
AM-215-RM	76/121
AM-282/2-RM	76/121
AM-32/3	76/121
AM-33/3	76/121
AM-34/2	76/121
AM-344	27/76/121
AM-344/05	27/76/121
AM-344-GB	27/76/121
AM-345-GB	27/76/121
AM-41/1	27/76/121
AM-41/2	27/76/121
AM-467-GB	27/74/120
AM-49/1	27/76/121
AM-49/2	27/76/121
AM-61-GB	76/121
AM-61-RM	76/121
AM-7002	76/121
AP-499/1	27/77/122
AP-510-BT-GB	27
AP-510-GB	76/121
AP-951/2	76/121
AS-404	25/74
AT-41/025	28/75
AT-41/05	28/75

References	Pages
AT-41/1	28/75
AT-49/025	28/75
AT-49/05	28/75
AT-49/1	28/75
AT-50/025	28/75
AT-50/053	28/75
AT-50/1	28/75
AT-5005	27
AT-51/025	28/75
AT-51/05	28/75
AT-51/1	28/75
AT-52/05	28/75
AT-52/1	28/75
AT-53/05	28/75
AT-53/1	28/75
AT-54/05	28/75
AT-54/1	28/75
AT-55/05	28/75
AT-55/1	28/75
AT-56/05	28/75
AT-56/1	28/75
AT-57/05	28/75
AT-57/1	28/75
AT-58/05	28/75
AT-58/1	28/75
AT-59/05	28/75
AT-59/1	28/75
AT-60/05	28/75
AT-60/1	28/75
AT-61/05	28/75
AT-61/1	28/75
AT-62/05	28/75
AT-62/1	28/75
AT-63/05	28/75
AT-63/1	28/75
AT-66/1	28/75
C-92-20	89
C-92-492	87
CC-151-K	83
CC-245-150/420-K	123
CC-245-225/420...*	123
CC-245-225/550-K	123
CC-245-60/150-K	123
CC-245-63/90...*	123
CC-245-63/150-K	123
CC-245-66/132-K	123
CC-245-90/225-K	123
CC-363*	87
CC-365-101	87
CC-45-K	83
CC-875-10/36*	86
CC-875-11/33*	86
CD-103	79
CD-104	79
CD-122	79
CD-124	79
CE-4-21*	82/88
CE-5-105-(*)	97
CE-5-50-(*)	97
CE-5-60-(*)	97
CE-5-70-(*)	97
CE-5-90-(*)	97
CE-5-90-C	71
CE-5-90-K	71
CE-75*	88
CF-3-72*	82
CF-5-40*	82/96
CF-5-90*	96
CG-02 (*)	20
CG-05 (*)	20
CG-05-B	56
CG-05-C	56
CG-10 (*)	20
CG-117	21/65/113
CG-118	21/65
CG-119	113

References	Pages
CG-12 (*)	20
CG-15 (*)	64
CG-16 (*)	64
CG-20 (*)	64
CG-22 (*)	64
CG-30 (*)	64/112
CG-35/2	22/66/113
CG-36	22/56/66/113
CG-37	22
CG-40 (**)	112
CG-80 (**)	22/66/112
CG-81	22/66
CG-96 (*)	24
CG-97-C	66/112
CG-98	56
CG-98 (*)	22
CG-99 (*)	64/66/112
CI-06-D	82
CI-10-D	82
CI-12-D	82
CL-1-06	89
CL-12	91/122
CL-2-10/30-2	83
CL-2-5/36-2	83
CL-40010	83
CL-4-41/2	83
CL-495-3	84
CL-497-00	84
CL-498-00	84
CL-499/101	84
CL-5-03	90
CL-5-33-GB	90
CL-5-36	90
CL-7-06/18*	90
CL-7-10/30*	90
CL-7-10/30-1*	90
CL-7-12/36*	90
CL-8-05	89
CL-8-36	89
CL-8-36/1	89
CM-02*	100
CM-04-K	100
CM-1-10	98
CM-1-15	98
CM-1-20	98
CM-3000	124
CM-3-03	96
CM-3-04	96
CM-3-05	96
CM-3-06	96
CM-3900-J	124
CM-4115-*	124
CM-4120-*	124
CM-4125-*	124
CM-4130-*	124
CM-4220*	124
CM-4230*	124
CM-4240*	124
CM-4345*	124
CM-4360*	124
CM-4400-J	96
CM-4410	96
CM-4410-*	96
CM-4410-I	96
CM-4415	96
CM-4415-*	96
CM-4415-I	96
CM-4420	96
CM-4420-*	96
CM-4420-I	96
CM-4425	96
CM-4425-*	96
CM-4425-I	96
CM-4610	124
CM-4610-*	124

References	Pages
CM-4610-I	124
CM-4615	124
CM-4615-*	124
CM-4615-I	124
CM-4620	124
CM-4620-*	124
CM-4620-I	124
CM-4625	124
CM-4625-*	124
CM-4625-I	124
CM-50	97
CM-6-15	126
CM-6-20	126
CM-6-25	126
CM-6-30	126
CM-7-10-A	88
CS-225*	114
CS-45	82
CS-90*	114
CT-7-25/1	67
CT-7-40/1	67
CT-7-63	114
CT-9-25	67
CT-9-45	67
CT-9-63	114
CX-01222	31
CX-01422	31
CX-01822	31
CX-35811	31
CX-45211	31
CX-45411	31
CX-45511	31
CZ-53-MR	85
CZ-53-MR/2	85
CZ-53-R	85
CZ-53-R/2	85
CZ-54-MR	85
CZ-54-R	85
CZ-55-MR	85
CZ-55-R	85
DT-170	33
DT-300	34
DT-500	32
DX-02001	35
DX-02002	35
DX-02006	31
KIT-01*	78
KIT-03	55
KIT-04	55
KIT-05	55
KIT-07	55
KIT-10**	78
KIT-23	45
KIT-24	45
KIT-25	45
KIT-27	45
KIT-ARC-01	68
KIT-ARC-08-C*	68
KIT-ARC-10-C*	68
KIT-ARC-10-J*	68
KIT-ARC-25-B*	68
KIT-ARC-40-B*	68
KIT-ARC-55-B*	68
KIT-ARC-65-B*	68
KIT-ARC-100-B*	68
KIT-HAUT-01-(*)	71/117
KIT-HAUT-02-(*)	71/117
KIT-HAUT-03-(*)	71/117
KIT-HAUT-04-(*)	71/117
KIT-HAUT-05-(*)	71/117
KIT-HAUT-06-(*)	71/117
M-24-10	92
M-24-120	92/127
M-24-120-S	92/127
M-24-150	92/127

General references index



References	Pages
M-24-150-S	92/127
M-24-16	92
M-24-16-S	92
M-24-25	92
M-24-25-S	92
M-24-30	92
M-24-35	92
M-24-35-S	92
M-24-40	92
M-24-50	92
M-24-50-S	92
M-24-70	92/127
M-24-70-S	92/127
M-24-75	92/127
M-24-95	92/127
M-24-95-S	92/127
M-28-120	92/127
M-28-150	92/127
M-28-50	92
M-28-70	92/127
M-87-153	128
M-87292	32/34
M-87-295	128
M-87369	29/30
M-87370	55/56
M-87384	18/62/110
M-87386	23/67
M-87-53	128
M-881622	18/62/110
M-881635	18/62/110
M-881836	18/62/110
M-881839	18/110
M-881889	62
M-881954	33
M-92-1647	34
M-92-28	100
M-95-1143	34
M-952206	18/62/110
M-952271	33/34
M-95626/4*	40
M-95627/4*	40
M-95-864	19/63/79/111
M-95-865	19/63/111
MC-116	42
MC-120/100	42
MC-120/15	42
MC-120/50	42
MC-121	42
MC-122	42
MC-123	42
MC-124	42
MC-126	42
MC-126/1	42
MC-141	41
MC-142	41
MC-143	41
MC-144	41
MC-145	41
MC-146	41
MC-147	41
MC-147/1	41
MC-148	41
MC-148/1	41
MC-149	41
MC-150	42
MC-153/05	41
MC-153/10	41
MC-153/30	41
MC-153/60	41
MC-155/05	41
MC-155/10	41
MC-155/20	41
MC-155/30	41
MC-155/60	41
MC-155/80	41

References	Pages
MC-156	42
MC-156/1	42
MC-161	40
MC-165/40	39
MC-166/40	39
MC-166/60	39
MC-175/40	39
MC-181	42
MC-182	42
MC-183	42
MC-290/2	39
MC-296-00/08/4*	40
MC-296-115/08/4*	40
MC-296-115/12/4*	40
MC-296-160/12/4*	40
MC-296-320	40
MC-296-440	40
MC-296-P/4*	40
MD-02	69/115
MD-10-C	100
MD-12-C	100
MD-14-C	100
MD-40*	100
MD-42-B	100
MD-535-K	100
MF-60	128
MF-61	128
MF-62	128
MF-63	128
MF-66	128
MG-115/1-S	82
MG-206-AK	100
MG-206-CK	100
MG-207-K	100
MG-207-S	100
MG-352-K	100
MG-352-VK	100
MG-353-R	100
MG-353-V	100
MG-354-K	100
MG-355	100
MGS-100-S	97
MGS-103-S	97
MK-08	101
MK-100	102
MK-15	101
MK-20	101
MK-40	102
MK-60	102
ML-05/10	102
ML-08/20*	102
ML-16/20*	102
ML-32/20*	102
MO-052	70/116
MO-11000	18/62/110
MO-11001	18/56/62/110
MO-11003	18/62/110
MO-11010	18/62/110
MO-11011	18/62/110
MO-16-A	72
MO-17-A	72
MO-182/1-B	18/62/110
MO-182/1-J	18/62/110
MO-182/1-R	18/62/110
MO-183-BL	18/62/110
MO-183-RL	18/62/110
MO-184	18/62/110
MO-185-B	18/62/110
MO-185-BL	18/62/110
MO-185-BLM	18/62/110
MO-185-J	18/62/110
MO-185-R	18/62/110
MO-186	18/62/110
MO-23	72
MO-237-D	42

References	Pages
MO-24	72
MO-25	72
MO-26	72
MO-308	103
MO-331/04-B	102
MO-331/06-A	102
MO-331/08-B	102
MO-331/09-A	102
MO-331/10-B	102
MO-331/12-A	102
MO-331/13-P	101/102
MO-331/16-B	102
MO-331/22-P	101
MO-331/26-B	102
MO-331/38-P	101
MO-332/09-D	101
MO-332/13-E	101
MO-332/14-D	101
MO-332/18-E	101
MO-332/22-E	101
MO-337/06	101
MO-339/02	101
MO-339/03	101
MO-34	55
MO-35	72
MO-371/01	103
MO-371/100	103
MO-375/150	103
MO-375/250	103
MO-375/300	103
MO-375/400	103
MO-38510	56
MO-431/07	103
MO-431/15	103
MO-431/30	103
MO-435/07	103
MO-435/15	103
MO-510-03-EX	56
MO-52020	69/115
MO-52021	69/115
MO-52031	117
MO-52033	117
MO-52034	117
MO-52-L	69/115
MO-53	70/116
MO-53002	70/116
MO-54	70/116
MO-54000	70/116
MO-54002	70/116
MO-54004	70/116
MO-54005-C	71
MO-54005-K	71
MO-54010	69/115
MO-55/1	70/116
MO-56009	70/116
MO-56010	70/116
MO-563(*)	69/115
MO-565(*)	69/115
MO-591000	71/117
MO-591002	70/116
MO-61001	50/56
MO-61002	50/56
MO-630	98
MO-64502	49
MO-65203	46
MO-65204	46/56
MO-65205	46/56
MO-65206	46/56
MO-65207	46/56
MO-65209	46/56
MO-65211	46
MO-65222	46
MO-65230	46
MO-65232	46/56
MO-65234	46/56

References	Pages
MO-65236	46/56
MO-65238	46
MO-65240	46
MO-65242	46/56
MO-65244	46/56
MO-65246	46
MO-65248	46
MO-652-D	46
MO-653-D	46
MO-66001	47
MO-66002	47/56
MO-66003	47
MO-66005*	47
MO-66102	47
MO-66105	48
MO-66202	47/56
MO-66300	47
MO-66302	47
MO-66402	47
MO-66404	47
MO-66502	48/56
MO-67101	48
MO-67102	48/56
MO-67103	48
MO-67302	50/56
MO-67304	50
MO-67305	50
MO-67306	50
MO-67401	48
MO-67402	48/56
MO-67404	48/56
MO-67500	48/56
MO-67501	49
MO-67502	49/56
MO-67599	49
MO-67600	49
MO-67601	49
MO-67611	49
MO-68/10	69/115
MO-68/15	69/115
MO-68008	52
MO-68008/19	52/56
MO-68009	52
MO-68010	52
MO-68011	52
MO-68012	52
MO-68013	52
MO-68014	52
MO-68015	52
MO-68016	52
MO-68017	52
MO-68018	52
MO-68019	52
MO-68020	52
MO-68021	52
MO-68022	52
MO-68023	52
MO-68024	52
MO-68025	52
MO-68026	52
MO-68027	52
MO-68028	52
MO-68029	52
MO-68030	52
MO-68032	52
MO-68107	52
MO-68108	52
MO-68109	52
MO-68110	52
MO-68111	52
MO-68112	52
MO-68113	52
MO-68114	52
MO-68115	52
MO-68116	52

General references index



References	Pages
MO-68117	52
MO-68118	52
MO-68119	52
MO-68120	52
MO-68121	52
MO-68122	52
MO-68123	52
MO-68124	52
MO-68125	52
MO-68126	52
MO-68127	52
MO-68128	52
MO-68129	52
MO-68130	52
MO-68132	52
MO-68610	52
MO-68613	52
MO-68614	52
MO-68701	51
MO-68702	51
MO-68703	51
MO-68704	51
MO-69002	51
MO-69003	51/56
MO-69004	51
MO-69005	51
MO-69050	54
MO-69210	51
MO-69213	51
MO-69216	51
MO-69217	51
MO-69218	51
MO-69219	51
MO-69306	53
MO-69307	53
MO-69308*	53
MO-69308/23	53/56
MO-69309	53
MO-69310*	53
MO-693100	54
MO-69311	53
MO-69312*	53
MO-69313*	53
MO-69314*	53
MO-69315	53
MO-69316	53
MO-69317	54
MO-69317*	53
MO-69318	53
MO-69319*	53
MO-69321*	53
MO-69322*	53
MO-69323*	53
MO-69393	54
MO-69394	54
MO-69395	54
MO-69396	54
MO-69397	54
MO-69398	54
MO-69408*	53
MO-69408/23	53
MO-69410*	53
MO-69411	53
MO-69412*	53
MO-69413*	53
MO-69414*	53
MO-69415	53
MO-69416	53
MO-69417	53
MO-69418	53
MO-69419*	53
MO-69420	53
MO-69421*	53
MO-69422*	53
MO-69423*	53

References	Pages
MO-69424	53
MO-69430	53
MO-69513*	53
MO-69514*	53
MO-69523*	53
MO-69524*	53
MO-69533	53
MO-69534	53
MO-69542	53
MO-69543	53
MO-69544	53
MO-69610	54
MO-69613	54
MO-69614	54
MO-69616	54
MO-69617	54
MO-69618	54
MO-69619	54
MO-69621	54
MO-69735	54
MO-69736	54
MO-69737	54
MO-69738	54
MO-69739	54
MO-69740	54
MO-69741	54
MO-69742	54
MO-69903	51/56
MO-69904	51/56
MO-69905	51
MO-69906	51/56
MO-69908	51
MO-69910	51
MO-69912	51
MO-71	69/115
MO-72003	43
MO-72004	43
MO-72005	43
MO-72006	43
MO-72007	43
MO-72009	43
MO-72040	43
MO-72042	43
MO-72044	43
MO-72046	43
MO-72100	50
MO-72102	44
MO-72122	44
MO-72132	44
MO-72142	44
MO-72155	44
MO-72162	44
MO-72172	44
MO-72200	44
MO-751	56
MO-832	97
MO-833	98
MO-834	98
MP-01	23/67
MP-02	23/67
MP-100/03-10	23/67
MP-100/03-5	23/67
MP-100/05-10	67
MP-100/05-5	67
MP-100/10-10	114
MP-100/10-5	114
MP-19	56
MP-211	98
MP-212	98
MP-213	98
MP-213/LAM	98
MP-213/EXT	98
MP-26-A	56
MP-311	103
MP-315	103

References	Pages
MP-32/15	56
MP-35/12	56
MP-39	56
MP-42/11	23/67
MP-42/16	23/56/67
MP-42/66	23/67
MP-506/2	72/118
MP-508/2	72/118
MP-509/2	72
MP-510/2	72/118
MP-514/2	72/118
MP-515/2-R	72/118
MP-60/03-10	23/67
MP-60/03-5	23/67
MP-60/05-10	67
MP-60/05-5	67
MP-60/10-10	114
MP-60/10-5	114
MP-700-1	23
MP-700-2	23
MP-700-3	23
MP-700-4	23
MP-700-5	23
MS-115-1	79
MS-118	19/63/111
MS-122	19/63/111
MS-126	19/63/79/111
MS-127	19/63/111
MS-152+	30
MS-62	31
MS-63	31
MS-8013	31
MS-8014	31
MS-911/2	30
MS-911-EX	29/56
MT-1910	80
MT-1911	81
MT-1911-E	81
MT-1911-S1	81
MT-1920	80
MT-1921	81
MT-1921-E	81
MT-1921-S1	81
MT-205	38
MT-206	38
MT-207	38
MT-245	38
MT-249	38
MT-2950/35*	81
MT-2951	81
MT-2951/1	81
MT-2951/2	81
MT-315/2	39
MT-3950/35*	81
MT-3951	81
MT-3951/1	81
MT-3952	81
MT-3952/1	81
MT-404	37
MT-405	37
MT-406	37
MT-407	37
MT-508/36	95
MT-508/46	95
MT-5805	80
MT-613	93
MT-613/1	93
MT-613/2	93
MT-615/1-7,5	37
MT-615/2-7,5	37
MT-630-C	94
MT-630-K	94
MT-630-S	94
MT-633-C	94
MT-633-K	94

References	Pages
MT-633-S	94
MT-634/1-C/K	94
MT-634-C/K	94
MT-635/1-C/K/S	94
MT-640-S	94
MT-641-S	94
MT-650	38/94
MT-652/10	94
MT-652/15	94
MT-6613	93
MT-6613/1	93
MT-701/1	128
MT-708/40	128
MT-709-B	128
MT-731*	125
MT-732*	125
MT-734*	125
MT-735*	125
MT-737*	125
MT-790	127
MT-792	127
MT-797	127
MT-812-C	81
MT-813-C	81
MT-814/2	81
MT-814/3	81
MT-815-C	81
MT-815-E	81
MT-815-S	81
MT-815-S1	81
MT-817-C	81
MT-840/1	81/94
MT-841	81
MT-843	94/126
MT-847	126
MT-852	126
MT-853	126
MT-895	127
MT-9801	80
MV-104/*	24
MV-135*	24/67
MX-404	84
MX-430-M	105
MX-433-T	105
MX-701	35
MX-702	35
MX-704	36
SUPBAND122	19/63/111
SUP122	19/63/111
TF-1	105
TO-2-16	104
TO-2-19	104
TO-3-16/19	104
TO-8/32	105
TO-32/100	105
TP-1610-R	104
TP-1615-R	104
TP-1620-R	104
TP-1910-R	104
TP-1915-R	104
TP-1920-R	104
TR-116-10	104
TR-116-15	104
TR-119-10	104
TR-119-15	104
TR-119-20	104
TR-1610	104
TR-1615	104
TR-1620	104
TR-1910	104
TR-1915	104
TR-1920	104
TRI-1610	104
TS-1601	104
TS-1901	104

IEC Standard



International Electrotechnical Commission is a worldwide organization for standardization comprising national electrotechnical committees (NC). The object of the IEC is to promote international cooperation on all questions concerning standardization in the electrical fields. These standard have been approved by more than 50 different countries including Australia, Canada, China, France, Germany, Japan, Russia, Malaysia, Singapore, Mexico, India, Indonesia, South Africa, New Zealand, USA...

A rapid need to perform electrical operations evolved with the time. This resulted in regional or national working on specific standards without coordination.

IEC standards were developed according to a consensus procedure and approved by recognised body. They provide an adequate answer at worldwide level.

The IEC standard presents benefits to all parties involved:

- for the end-users: it is the guarantee of a suitable and internationally recognized quality equipment,
- for the Testing Laboratories: it determines better standards of testing and control procedures for materials,
- for the manufacturers: it helps them to make a better technico-commercial offer.

CATU designs, tests and manufactures under the IEC requirements.

CATU is the first manufacturer to provide a full range of products complying with the IEC standards.

CATU shows its innovation ability for the welfare of the electrical world.

CATU™

Golden safety rules



Electrical accidents are responsible for severe body injuries, which cause troubles not only for the workers themselves, but for their families as well.

Furthermore they cause financial penalties to the utilities, due to the failure of supply and the cost associated with the injured workers.

How does the electrical risk appears?

- When an electrical line or conductor is unexpectedly still live
- When current sources are not properly isolated
- When power generators are connected to the network
- When there are atmospheric phenomenons such as lightning
- Through induced currents

However, it has also been statistically observed that the most common causes of unexpected presence of voltage on electrical lines or installations were due to:

- A mistake in operating a switch
- A mistake in identifying the work to perform
- A "faulty" switch (one of the links for example remaining partially engaged)

How to avoid electrical accidents?

1. By observing Simple Electrical Safety Rules directed by common Sense (even if Working Practices vary from a country to another, GOLDEN RULES always apply).
2. By using Simple, Light and Reliable Electrical Safety Equipment.

First, select the right equipment

Personal protective equipment, safety padlock, voltage detector, short circuiting and earthing system, warning signs.



Golden safety rules

SEPARATE THE WORK AREA FROM ALL POSSIBLE SOURCES OF POWER-SUPPLY
by opening circuit-breakers, switches...

1




2

LOCK THE LINK IN THE OPEN POSITION
with a safety lock system (safety padlock)

CHECK THE ABSENCE OF VOLTAGE
at source and on site, on each conductor and
apparatus involved.

3

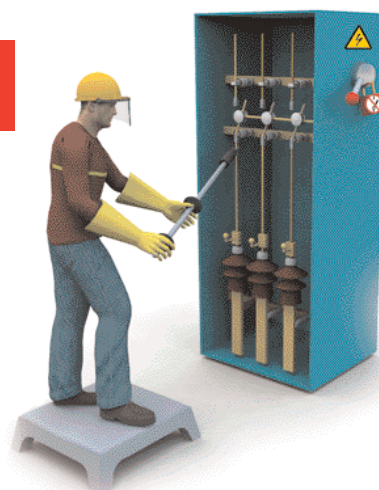


4

APPLY APPROPRIATE SHORT-CIRCUIT AND EARTHING SYSTEMS
in sufficient numbers on the conductors of your
network where operation is taking place.

SHOW, WARN OTHERS AND LIMIT THE WORK AREA
even during the most simple temporary
maintenance operation

5

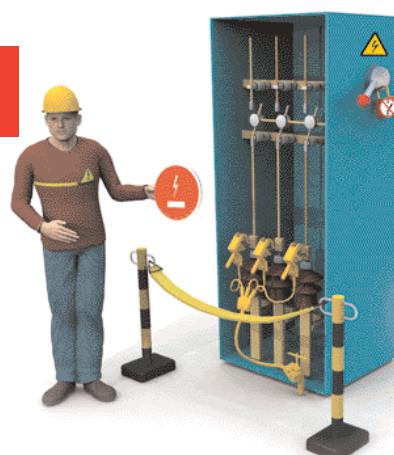

PERSONAL PROTECTIVE EQUIPMENT (P.P.E.)

Specifications



P.P.E. are defined as any device or means intended to be worn or held by one person to protect itself against one or several risks liable to threaten its safety or its security.

The personal protective equipments have to be in compliance with the requirements of the European Directive 89/686 and the international standards which define:

- The protections adapted to the kind of risk.
- The highest level of protection possible
- The comfort, the ergonomics and the quality of the equipment

The obligations of use of the PPE in companies are defined by the Directive Européenne 89/656.

It is of the responsibility of the employer :

- To give free of charge and in a personal way equipments necessary and adapted to the risks,
- To watch over their actual use,
- To assure the necessary replacement as well as the maintenance and the compliance,
- To inform the users of the risks against whom they are protected.

Before any intervention it is imperative to equip itself with the appropriate equipment in compliance with the standards.

P.P.E. check

- Every PPE must be verified at least visually before and after every use.
- Regular tests must be made by qualified persons and at least annually.
- If the slightest doubt exists the equipment must be reformed and replaced at once.



Below 1000V



Equipment guide	14
Personal protective equipment	18
Safety padlocks and warning signs	25
Voltage detectors and testers	29
Installation testers	32
Short-circuiting and earthing systems	37
Bimaterial insulated tools	43
Insulated tools	46



APPLICATIONS

Examples of usual applications




Home and Building

Since 30 years, CATU has developed a full range of products especially designed for home and building electricians: self adhesive warning signs, personal protective equipment, voltage detectors, installation testers, insulated tools.



8

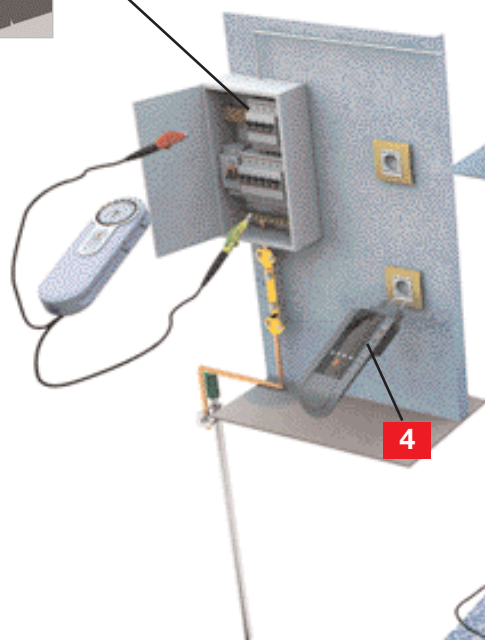

4



5



2

3

Voltage detector

- 1** Bipolar voltage detector 6 to 690 V a.c./ d.c.

Reference: MS-911-EX

Page: 29

Installation testers and accessories

- 2** Earth and continuity loop controller "CATOHM"

Reference: DT-300

Page: 34

- 3** Small 2 parts pole for working at distance

Reference: M-95-1143

Page: 34

- 4** RCDs tester

Reference: DT-170

Page: 33

- 5** Insulation tester

Reference: DT-500

Page: 32

- 6** Phase rotation indicator


Reference: MS-152+

Page: 30

APPLICATIONS

Before intervention select the right personal protective equipment

Industry

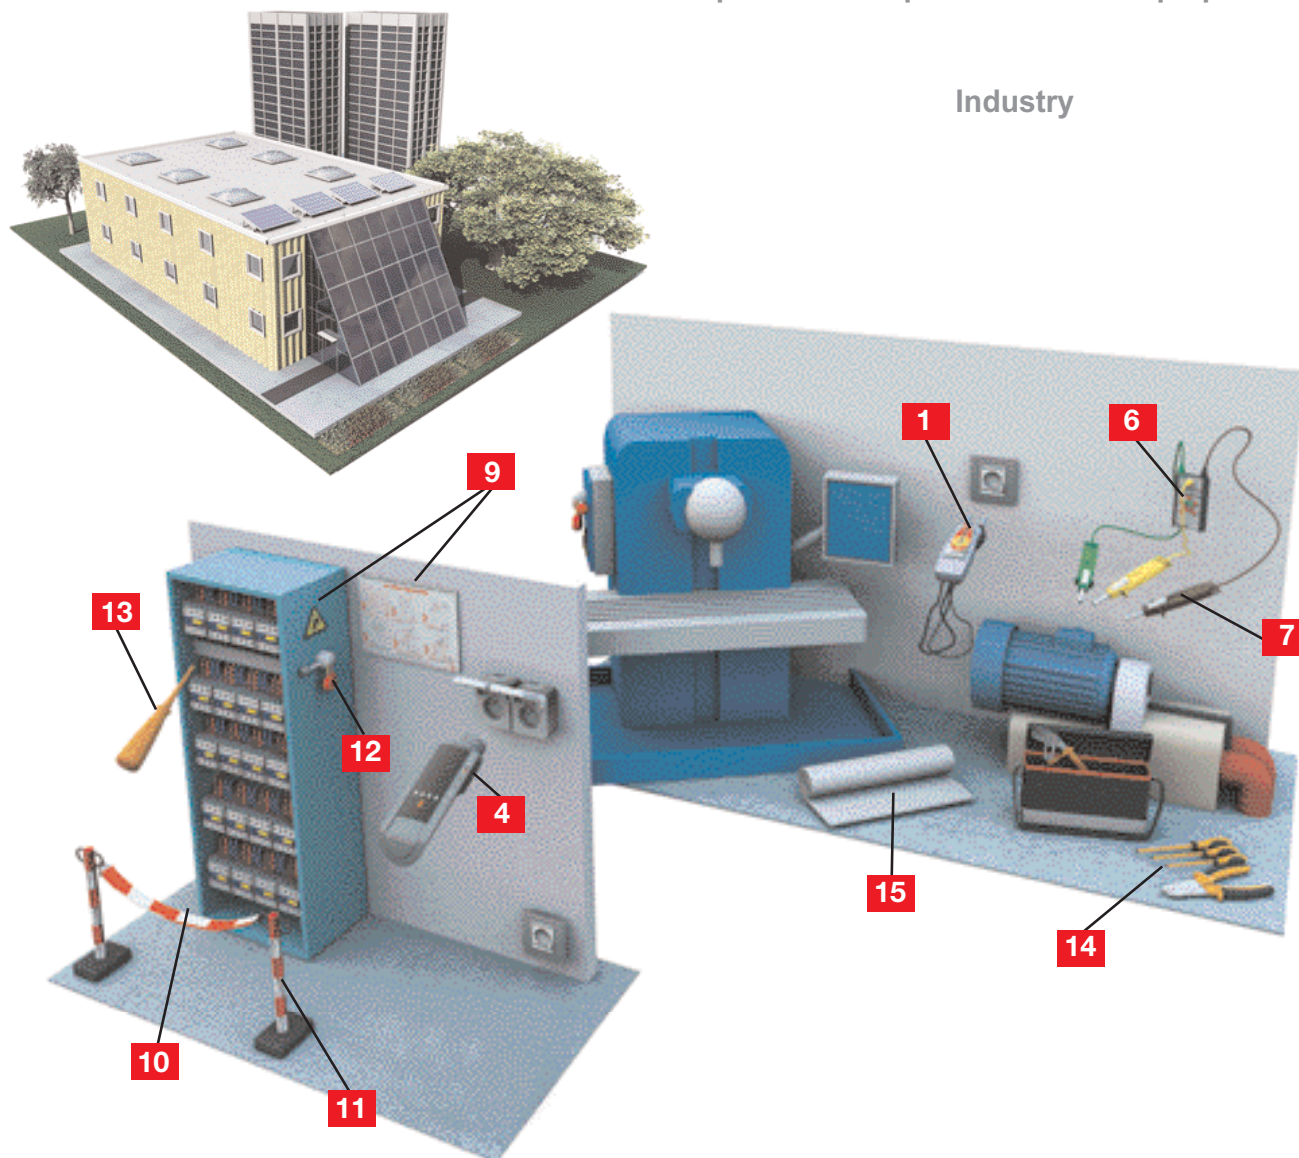

Installation testers and accessories

7	Safety test probes IP2X for controllers	Reference: CX- (serie)	Page: 31
---	---	------------------------	----------

Warning signs, safety padlocks and delineators


8	Single pole breaker lockout with padlock	Reference: AL-201-C/1	Page: 26
9	Warning signs aluminium or self adhesive		Page: 27/28
10	Chain delineator	Reference: AL-63-A	Page: 27
11	Safety boundary post	Reference: AL-318	Page: 27
12	Safety padlock	Reference: AL-230/...	Page: 25

Insulated tools

13	Phase tester insulated screwdriver IEC-60900 1000 V	Reference: MO-65222	Page: 46
14	Insulated screwdriver, pliers and accessories IEC-60900 1000 V	Reference: MO-72042	Page: 43 to 46
15	Insulated mat	Reference: MP-42/11	Page: 23

APPLICATIONS

Examples of usual applications

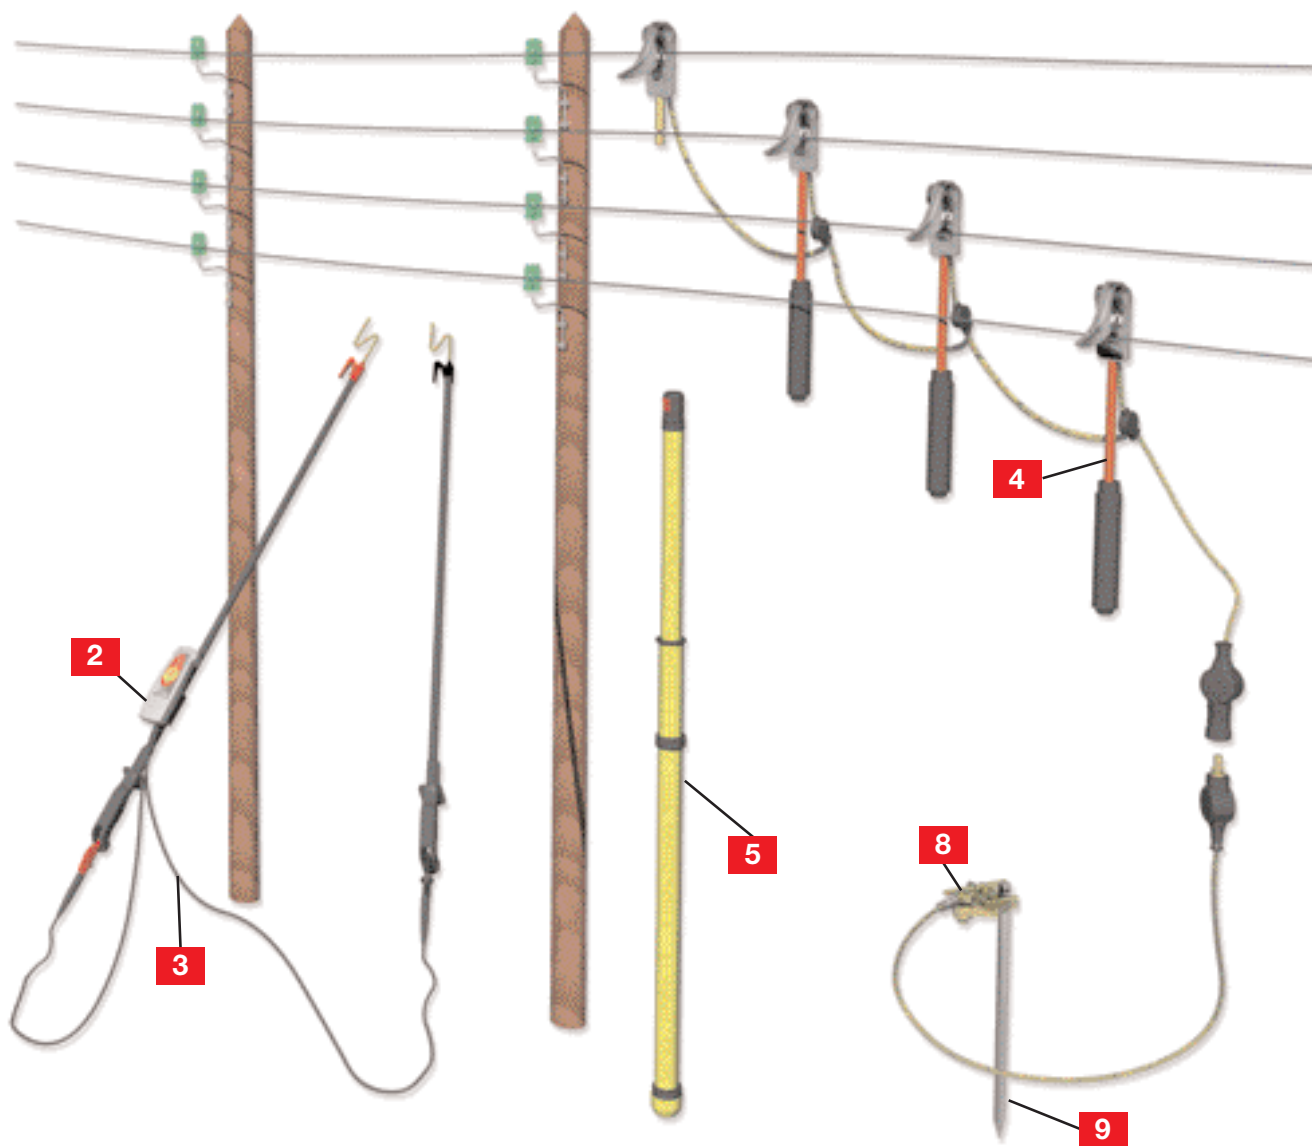

Voltage detector


1	Bipolar voltage detector with phase rotation 12 to 400 V a.c./ d.c.	Reference: MS-911/2	Page: 30
2	Bipolar voltage detector 6 to 690 V a.c./ d.c.	Reference: MS-911-EX	Page: 29
3	Contact probes for use on bare overhead line length: 1.2 m	Reference: MS-8014	Page: 31

Short-circuiting Systems

4	Short-circuiting system for bare overhead line with snapping system	Reference: MT-405	Page: 37
5	Insulating stick for short-circuiting bare overhead line system	Reference: CE-2-21-C	Page: 37
6	Short-circuiting system for insulated overhead line (sockets system)	Reference: MT-205	Page: 38
7	Short-circuiting and earthing systems for consumer units	Reference: MC-290/2	Page: 39

APPLICATIONS

Before intervention select the right personal protective equipment

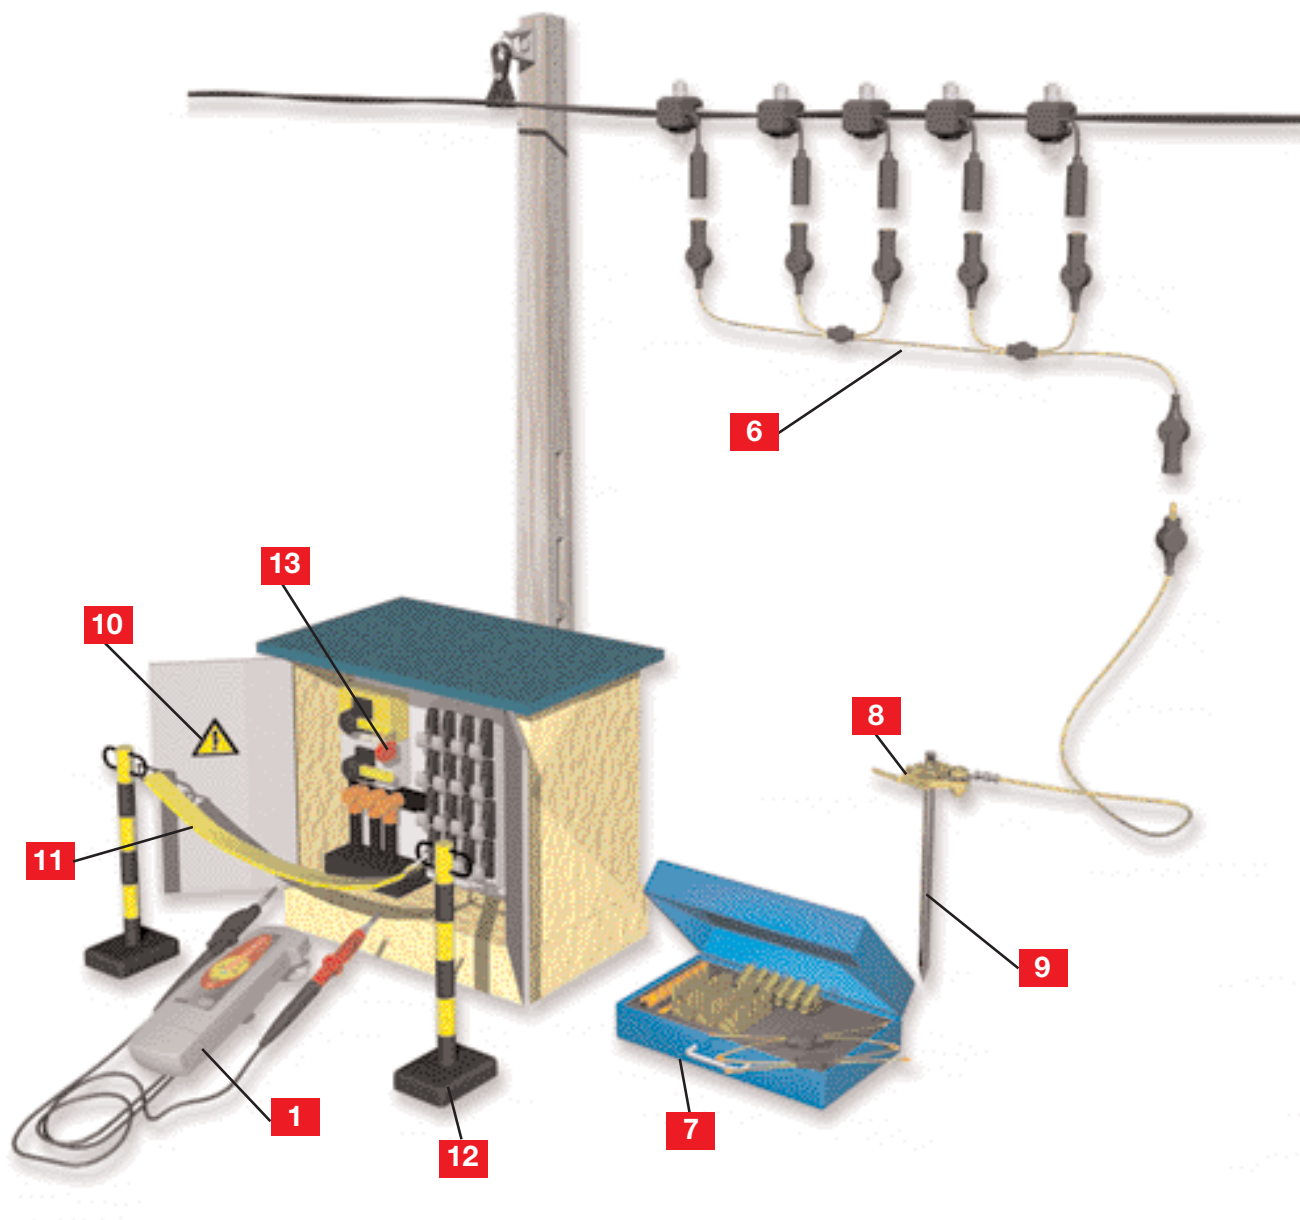

Earthing systems

8 Earthing equipment with cable and earth clamp

Reference: MT-245

Page: 38

9 Hexagonal earth rod length: 1 m

Reference: MT-650

Page: 38

Safety padlocks and warning signs

10 Warning signs aluminium or self adhesive

Page: 27/28

11 Chain delineator

Reference: AL-63-A

Page: 27

12 Safety boundary post

Reference: AL-318

Page: 27

13 Safety padlock

Reference: AL-230/...

Page: 25

Personal protective equipment

Head and eyes protection

Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.




MO-11000	Clear lenses, delivered in pouch
MO-11001	Tinted lenses, delivered in pouch
MO-11003	Tinted lenses, UV/IR protection, welding filter 2. EN 169. 80°C

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.

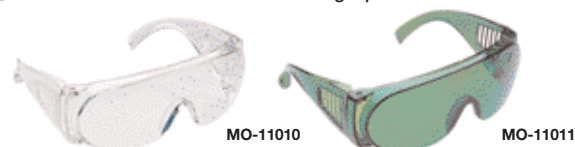

MO-11010	Clear lenses
MO-11011	Green tinted lenses

ABS helmet

Electrically insulating helmets for use on voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg. **EN 166/EN 170** **EN 50365** **ANSI Z89.1:2003** **Class E 20 kV** **CE**



MO-182/1-B	White
MO-182/1-R	Red
MO-182/1-J	Yellow

Face shield

Protection against electric short-circuits arcs. Face shield adjustable on MO-182 helmet. 100% UV protection. Weight: 0.170 kg. **EN 166/EN 70** **CE**

CAUTION: Do not use for welding operations.



MO-184	Single size, adjustable by rubber band
--------	--

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0,465 Kg. **EN 397** **CE**



MO-183-BL	White, single size, adjustable
MO-183-RL	Red, single size, adjustable

Face shield

Polycarbonate face shield adjustable on the head by milled wheel. Protection against electric arcs of short-circuits. Anti-mist treatment. Anti-scratch treatment. **EN 166/EN 170** **CE**

CAUTION: Do not use for welding operations.



MO-186	Single size, adjustable
M-881635	Spare face shield for MO-186
M-87384	Bag for face shield and helmet
M-952206	Spare strap for MO-186

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg. **EN 166/EN 170/EN 397** **EN 50365** **CE**



MO-185-BL	White
MO-185-BLM	White, chinstrap with a chin
MO-185-R	Red
MO-185-J	Yellow
MO-185-B	Blue
M-881622	Spare face shield for MO-185
M-881836	Spare white padded headband
M-881889	Spare complete set (harness, chinstrap, headband)

Personal protective equipment

Head and eyes protection

Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet.
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.

CE



MS-118 Headlamp - Weight: 0.187 kg

M-95-865 Halogen bulb (sold by set of 5 units)
5.2 V 0.5 A

M-95-864 Hooks set for helmet

LED's headlamp (4 LED's)

Can be carried either on the head or any kind of helmet thanks to it supplied adhesive clip. (fig. 1 and 2).
3 lighting levels: large or narrow for a short or long distance, and both for maximal power.
Flash mode.
4 white LED's lamp with adjustable angle.
Range: 10 to 15 meters.
Powered by 3 batteries LR03 (AAA).
Autonomy: 90 hours.

CE



Fig. 1



Fig. 2

MS-122 Delivered with batteries, carrying bag, headband and adhesive clip. Weight: 82g

SUPBAND122 Adhesive support and headband kit

SUP122 Kit of 5 adhesive supports

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's).
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting.
IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.

CE



MS-127 Delivered with batteries and a carrying bag Weight: 226 g

M-95-864 Hooks set for helmet

Intrinsically safe ATEX LED's Headlamp

Ex II 2GD EEx ia IIC T4

CE

Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Catégorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126 Delivered with batteries - Weight: 0.125Kg

M-95-864 Hooks set for helmet

Personal protective equipment

Insulating
rubber gloves

Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard.

To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter.

The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set.

Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.

IEC-60903 

EN 60903

CE



Reference	Class	Voltage (V)	Designation	Overgloves size	Weight (g)
CG-05 (*)	00	500	latex	**	90
CG-10 (*)	0	1 000	latex	**	200

* References to be completed by size A, B, C, D.

** See below

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11.

Composite gloves

Insulating gloves with higher mechanical properties for working in full safety without leather overgloves.

IEC-60903 

EN 60903

CE



Reference	Class	Voltage (V)	Designation	Weight (g)
CG-02 (*)	00	500	orange composite gloves with mechanical properties	270
CG-12 (*)	0	1 000	orange composite gloves with mechanical properties	450

* References to be completed by size A, B, C, D.

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11.

SELECTION BOARD SIZE INSULATING GLOVES/OVER GLOVES

Gloves reference	Gloves size	Overgloves reference	Overgloves size
CG-05 (*) CG-10 (*) 	A	CG-98 (*) 	B
	B		C
	C		D
	D		D

Personal protective equipment

Insulating
rubber gloves

Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Insulating gloves testing equipment

Equipment intended for the verification of the dielectric properties of gloves, insulating tools, elements for maneuvers, insulators, blankets, sleeves, etc. It possesses output voltages according classes 00, 0, 1, 2 and 3 of IEC standards.

The user of the CG-118 can set:

- Type of indication: acoustic signal that indicates if the insulation is fulfilling or not the standard or digital measurement of the leakage current of the element under test.
- Test period
- The language
- Select an Auto diagnose test

Technical features:

Output voltage: 2.5, 5, 10, 20, 40 kVCC.

Class tests: 00, 0, 1, 2 and 3 according IEC.

Input voltage: 110-220 VAC / 50-60 Hz. / 12 VCC and internal rechargeable battery.

Accessories:

- Bucket for testings
- Input and earthing cables
- Rubber gloves test electrodes
- User's manual
- Carrying case

CG-118

Insulating testing equipment



Accessories



Back panel CG-118

Pneumatic glove tester

For compulsory control of gloves before use.
Checking is done by inflating and immersing in water.

CG-117

140 x 150 x 160 mm - Weight: 0.600 kg



Personal protective equipment

Insulating rubber gloves

Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Undergloves

Cotton undergloves

To be used with insulating rubber gloves.

These washable cotton undergloves improve the use of the insulating gloves.

They bring the best held, hygiene and a greater comfort.



CG-80 (**)

** H: men / F: women



Overgloves

Used as outer gloves to protect insulating gloves in dry environment.

Silicon grain leather, very flexible.

Large protective cuff in chrome tanned hide.

Protection against electric arcs.

Red adhesive strap.

EN 388



3122



CG-98 (*)

Weight: 0.170 kg

* Add sizes: A, B, C, D.

Nomex undergloves

Undergloves 100 % Nomex.

To be used under insulating gloves, for a protection against the electric hazard.

FR - Flame Resistant undergloves.

Ideal complement to Arc Flash Equipment (see page 68)



CG-37

Nomex undergloves



Rubber gloves box

To be placed in high voltage stations, or to be carried.

Specially designed for protecting insulating gloves.

This plastic box also ensures the protection against UV radiation of insulating gloves.

The transparent cover enables to check gloves presence.

Bottle of talc included.

Can be fixed on wall.



CG-35/2

101 x 224 x 476 mm - Weight: 1.850 kg

Mittens

Cotton mittens.

Wearing these undergloves also limits the effects of perspiration: its fingerless gloves shape allowing to keep the maximum of dexterity.



CG-81

Mittens



Carrying bag

Made from reinforced

waterproof fabric for transport of rubber gloves in vehicles and tool boxes.

Rear loop for belt and snaps.



CG-36

90 x 175 x 585 mm - Weight: 0.120 kg

Personal protective equipment



Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.

IEC-61111
EN 61111
CE



Individual models.

Reference	Thickness (mm)	Class	Voltage (kV)	Dimensions (m)
MP-42/11	3	3	≤ 26.5	1 x 1
MP-42/16	3	3	≤ 26.5	0.6 x 1
MP-42/66	3	3	≤ 26.5	0.6 x 0.6

For placing in front of panels.

Reference	Thickness (mm)	Class	Voltage (kV)	Dimensions (m)
MP-60/03-5	3	3	≤ 26.5	0.6 x 5
MP-60/03-10	3	3	≤ 26.5	0.6 x 10
MP-100/03-5	3	3	≤ 26.5	1 x 5
MP-100/03-10	3	3	≤ 26.5	1 x 10

Bags for insulating mats

Specially designed for carrying and protecting insulating mats. Equipped with a shoulder strap and a plastic window for instructions and storage identification.



MP-01	For MP-42/16 and MP-42/66 length: 70 cm
MP-02	For MP-42/11 length: 110 cm

Insulating stepladders

A complete range with top quality features:
Insulation between two steps: 30 000 V
Lateral risers in polyester/fiberglass
Aluminium alloy rungs with anti-slip coating.

EN 131
CE



Reference	Nbr.of steps	Foot rest height (m)	Reach height (m)	Weight (kg)
MP-700-4	3	0.68	2.68	5.9
MP-700-1	4	0.91	2.81	6.9
MP-700-2	5	1.14	3.04	8.0
MP-700-3	6	1.37	3.27	9.4
MP-700-5	7	1.60	3.50	11

Multi-pockets electrician bag

Specially designed for carrying and protecting insulating mats, face shield and controllers. Equipped with several pockets.



M-87386	65 x 15 x 25 cm
---------	-----------------

Personal protective equipment



Below 1000V

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Electrician suit

Suit without metallic part, avoiding any flash hazards. 100% cotton.

Colour: blue

- Front closed by injected zip every plastic part hidden.
- Gusset back.
- 2 flattened breasts pockets closed by injected zips every plastic part hidden.

- 2 flattened thighs pockets.
- Tape measure pocket on right back leg.
- Elastic in the back.
- Straight sleeves.



	*	01	02	03	04	05	06	07
MV-104/*	Size	40/42	44/46	48/50	52/54	56/59	60/62	64/66
	Chest size (cm)	85/92	92/100	101/108	109/116	117/124	125/132	133/140

Insulating boots

Made from high quality dielectrical rubber, very flexible and resistant.
Anti-perforation composite sole and shell.
Anti-slip sole.
Protection against step and touch hazardous potential gradients.

ISO EN 20345

CE



MV-135* Hight: 370 mm - Weight: 1.950 kg (42 size)

* Add sizes: 39-40/41-42-43-44-45-46/47-48-49/50.

Working gloves

All-grain leather, welt sewn, shirred elastic wrist back.
These gloves are used for mechanical protection of hands during handling of tools, specially in wet environment.

EN 388

CE

3122



CG-96 (*) Weight: 0.115 kg

* Add sizes: A, B, C, D.

Safety padlocks and warning signs

Padlocks

Below 1000V

Padlocks

Warning signs and delineators

warning signs

A wide range of brass padlocks, in a plastic body.

Brass ring bow 50 or 70 mm. Diameter of the ring bow 4 or 6 mm. Different n° of keys. Colours : red, white, yellow, blue or green.

Padlocks with warning signs

Reference	Ring bow (mm)	Ø (mm)	Weight (kg)
AL-230-(*)-EX	50	6	0.170
AL-230-S-(*)-EX	70	6	0.190
AL-230-Z-EX	50	6	0.170
AL-230-S-Z-EX	70	6	0.190
AL-240-(*)-EX	50	4	0.170
AL-240-S-(*)-EX	70	4	0.190
AL-240-Z-EX	50	4	0.170
AL-240-S-Z-EX	70	4	0.190

* Add n° of key: 111 or 222

"00" n° standard key: n° of key upon request. Z: random n° of key



Colour padlocks range

Reference	Ring bow (mm)	colour	Ø (mm)	Weight (kg)
AL-240-B-Z-EX	50	White	4	0.170
AL-240-B-00-EX	50	White	4	0.170
AL-240-S-B-00-EX	70	White	4	0.190
AL-240-J-Z-EX	50	Yellow	4	0.170
AL-240-J-00-EX	50	Yellow	4	0.170
AL-240-S-J-00-EX	70	Yellow	4	0.190
AL-240-BL-Z-EX	50	Blue	4	0.170
AL-240-BL-00-EX	50	Blue	4	0.170
AL-240-S-BL-00-EX	70	Blue	4	0.190
AL-240-V-Z-EX	50	Green	4	0.170
AL-240-V-00-EX	50	Green	4	0.170
AL-240-S-V-00-EX	70	Green	4	0.190



Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.



AS-404

4 markers in assorted colours (red, black, blue and green)

Safety padlocks and warning signs

Padlocks

Warning signs and delineators

warning signs

Below 1000V

Multiple locking apparatus

Holds up to four padlocks and a sign.



AL-200

AL-202

AL-200 100 x 60 x 10 mm - Weight: 0.150 kg

AL-202 165 x 50 x 12 mm - Weight: 0.200 kg

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



AL-207/10 For 10 padlocks - Weight: 0.06 kg

AL-207/30 For 30 padlocks - Weight: 0.130 kg

Handle with 6 padlocks

Handle of moulded plastic
for holding up to six padlocks.
Compartment with
transparent cover
for key storage.




Reference	Weight (kg)	Handle with 6 padlocks
AL-236-111-EX	1.150	AL-230-111-EX
AL-236-S-111-EX	1.210	AL-230-S-111-EX
AL-236-222-EX	1.150	AL-230-222-EX
AL-236-S-222-EX	1.210	AL-230-S-222-EX

Multiple locking

NEW !

Ideal complement to AL-201 ; also useful on padlockable levers of isolation switch. Flexible plastic cable high resistance Length: 2m - Ø 4 mm. Up to 3 padlocks Ø 4 mm to Ø 6 mm.

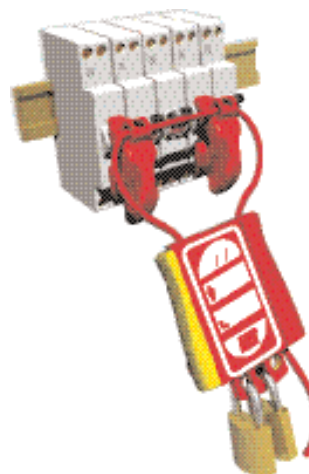


AL-205

The locking device with 2m cable

Single pole breaker lockout

Clipblock™, locks lever in off position to isolate and prevent breaker use.
Clipblock fits most of standard single pole devices.
Quick installation with a flat blade screwdriver N°3 (MO-65203).

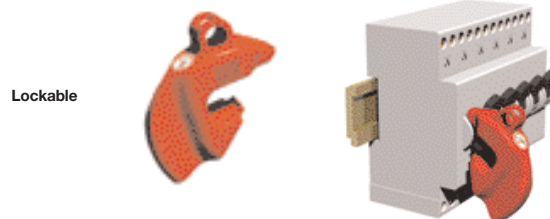

Lockable

AL-201/1

Delivered in Pack of 5 units

Single pole breaker lockout with padlock

Clipblock™, locks lever in off position to isolate and prevent breaker use.
Clipblock fits most of standard single pole devices.
Quick installation with a flat blade screwdriver N°3 (MO-65203).
Locked by padlock.



AL-201-C/1

Delivered with a padlock

Safety padlocks and warning signs

Warning signs
and delineators

Below 1000V

Padlocks

Warning signs and delineators

warning signs

Warning signs


Special tool steel, oil-hardened.



Reference	Type	Dimensions	Characteristics
AM-344-GB	aluminium	100 mm side	black letters on yellow
AM-345-GB	aluminium	100 mm side	black letters on yellow
AM-467-GB	aluminium	Ø 80 mm	white letters on red
AP-510-BT-GB	plastic	297 x 210 mm	golden rules
AM-344	aluminium	100 mm side	black or yellow
AM-344/05	aluminium	50 mm side	black or yellow
AM-49/1	aluminium	100 mm side	black or yellow
AM-49/2	aluminium	200 mm side	black or yellow
AM-41/1	aluminium	100 mm side	black or yellow
AM-41/2	aluminium	200 mm side	black or yellow
AM-20-GB	aluminium	350 x 250 mm	blue letters or plain aluminium
AP-499/1	plastic	Ø 100 mm	white or red

Safety adhesive tape

Adhesive tape black and yellow.



AT-5005 Length: 100 m

Chain delineators

Polyamide chains.



AL-31/25 Red and white - Length: 25 m

AL-31/05 Red and white - Length: 5 m

AL-32/05 Black and yellow - Length: 5 m

AL-31 Opening ring for AL-31/25

Delineators

Brightly colored ribbon.
Snap hook on one ribbon
end and another on spool.
A ring on spool brakes
ribbon at desired length.
wide: 50 mm
length: 20 m.



AL-62-A Red ribbon

AL-63-A Yellow ribbon

Plastique consommable.
Length: 500 m. Wide: 70 mm.



AL-138 Red and white

Safety boundary post

For temporary installation
used with tough link
chain delineators.
Removal foot
Ø 50 mm
Length: 0.9 m.



AL-316 Red and white - Weight: 4.2 kg

AL-318 Black and yellow - Weight: 4.2 kg

Fixing tools for warning signs



AC-21 Small nickelled chain sold in bags
of 10 units

AD-01 Roundheaded screw anti-vandalism
M3x15 sold in bags of 100 units

AC-44 Self-adhesive plastic plates Ø 40 mm for
magnetic fixing (10 units)

Safety padlocks and warning signs

Warning signs

Below 1000V

Padlocks

Warning signs and delineators

warning signs

Self adhesive warning signs

Complete range of self adhesive, warning signs conditioned in box of 20, 30 or 50 units.



Reference	Dimensions	Characteristics	Quantity/box
AT-41/025	25 mm side	self adhesive PVC	50
AT-41/05	50 mm side	self adhesive PVC	30
AT-41/1	100 mm side	self adhesive PVC	20
AT-49/025	25 mm side	self adhesive PVC	50
AT-49/05	50 mm side	self adhesive PVC	30
AT-49/1	100 mm side	self adhesive PVC	20
AT-50/025	25 mm side	self adhesive PVC	50
AT-50/053	50 mm side	self adhesive PVC	30
AT-50/1	100 mm side	self adhesive PVC	20
AT-51/025	25 mm side	self adhesive PVC	50
AT-51/05	50 mm side	self adhesive PVC	30
AT-51/1	100 mm side	self adhesive PVC	20
AT-52/05	50 mm side	self adhesive PVC	30
AT-52/1	100 mm side	self adhesive PVC	20
AT-53/05	50 mm side	self adhesive PVC	30
AT-53/1	100 mm side	self adhesive PVC	20
AT-54/05	Ø 50 mm	self adhesive PVC	30
AT-54/1	Ø 100 mm	self adhesive PVC	20
AT-55/05	Ø 50 mm	self adhesive PVC	30
AT-55/1	Ø 100 mm	self adhesive PVC	20
AT-56/05	Ø 50 mm	self adhesive PVC	30
AT-56/1	Ø 100 mm	self adhesive PVC	20
AT-57/05	Ø 50 mm	self adhesive PVC	30
AT-57/1	Ø 100 mm	self adhesive PVC	20
AT-58/05	Ø 50 mm	self adhesive PVC	30
AT-58/1	Ø 100 mm	self adhesive PVC	20
AT-59/05	Ø 50 mm	self adhesive PVC	30
AT-59/1	Ø 100 mm	self adhesive PVC	20
AT-60/05	Ø 50 mm	self adhesive PVC	30
AT-60/1	Ø 100 mm	self adhesive PVC	20
AT-61/05	Ø 50 mm	self adhesive PVC	30
AT-61/1	Ø 100 mm	self adhesive PVC	20
AT-62/05	Ø 50 mm	self adhesive PVC	30
AT-62/1	Ø 100 mm	self adhesive PVC	20
AT-63/05	Ø 50 mm	self adhesive PVC	30
AT-63/1	Ø 100 mm	self adhesive PVC	20
AT-66/1	100 mm side	self adhesive PVC	10



"Customize your labels! On request"

Available on request: Self adhesive rigid plastic warning signs. High Quality, strong sticking on every surfaces: concrete, painted wall, metal, wood, plastic, glass.

Voltage detectors

Voltage detectors

Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Voltage multi-tester DETEX™ MS-911-EX

The DETEX MS-911-EX has been designed in compliance with IEC/CENELEC standard 61243-3 in response to the requirements of European standard EN 50110-1.

The device is a voltage detector which checks the absence of voltage (AC and DC) and a multi-tester.

It enables to:

- check the voltage levels from 6 to 690 Volts;
- check the continuity of disconnected electric circuit;
- find phase or neutral (by single pole method);
- determine polarities.

A.C or D.C voltage test

voltage level testing by light-emitting diodes: 6, 12, 24, 50, 127, 230, 400, 690 V and emission of audible signal.

Polarity Test

Presence of A.C voltage signalling by lighting of +6 and -6 V diodes.

Presence of D.C voltage signalling by lighting of the +6V or -6V diode.

Phase/neutral identification

Signaling by lighting of the + 6V diode when the red probe is in contact with the phase.

Continuity test

Continuity resistance lower than 80 Ohms is indicated by lighting of all diodes and emission of audible signal.

Operating check

By short-circuit on the probes; all of the diodes light up, the audible signal sounds.

Technical features

Field of use: from 6 to 690 V z or =

Frequency: 50-60 Hz

Operating temperature: -10 °C / +55 °C

Storage temperature: -25 °C / +55 °C

Protection level: IP54 / IK 06

Double insulation Class II 

Power supply by 9 volt 6LR61 type alkaline battery

IEC 61243-3

IEC-61243-3 
EN 50110-1

CE



Fits on safety power plug (patented)



M-87369

Storage bag

MS-911-EX

Delivered with power supply
Weight: 0.370 kg

ACCESSORIES

M-87369

Storage Bag

Voltage detectors

Voltage detectors

Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Voltage multi-tester with phase rotation DETEX™ MS-911/2

The DETEX MS-911/2 has been designed in compliance with IEC/CENELEC standard 61243-3 in response to the requirements of European standard EN 50110-1.

The device is a voltage detector which checks the absence of voltage (AC and DC) and a multi-tester.

It enables to:

- check the voltage levels 12 to 400 Volts;
- check the continuity of disconnected electric circuit;
- find phase or neutral (by single pole method);
- Control the phase rotation;
- Determine polarities.

It is equipped with IP2X safety test probes.

A.C or D.C voltage test

voltage level testing by light-emitting diodes: 12, 24, 50, 127, 230, 400V and emission of audible signal.

Polarity Test

Presence of A.C voltage signaling by lighting of +12 and -12 V diodes.

Presence of D.C voltage signaling by lighting of the +12V or -12V diode.

Phase/neutral identification

Signaling by lighting of the + 12V and -12V diodes with audible signal when the red probe is in contact with the phase.

Phase rotation

Signaling by lighting of a green diode when the rotation is correct and by a red diode when the rotation is not correct.

Control method with only two safety test probes.

Continuity test

Continuity resistance lower than 80 Ohms is indicated by lighting of all diodes and emission of audible signal.

Operating check

By short-circuit on the probes; all of the diodes light up, the audible signal sounds.



IEC-61243
EN 50110-1

CE

MS-911/2

Delivered with power supply
Weight: 0.370 kg

M-87369

Storage Bag

Technical features

Field of use: From 12 to 400 V A.C and D.C

Frequency: 50/60 Hz

Operating temperature: -10/+55°C

Storage temperature: -25/+55°C

Protection level: IP54

Double insulation Class II

Power supply by 9 volt 6LR61 type alkaline battery

Phase rotation indicator DETEX™ MS-152+

Signaling via the successive lighting of diodes symbolising rotation. Input terminals are connected to the corresponding phases

(green, yellow, brown):

correct connection: lighting according to "OK" order,

incorrect connection: "REVERSE" order lighting: reverse 2 phases.


"FAULT" diode lits: phase cut off or incorrectly connected.

90 to 400 V - 50/60 Hz / IP54 IK06 / CAT III.

Works on generating units.

Device delivered in storage bag with:

3 probes with retractable protectors and 1.20 m lead - yellow, green and brown - clamps - yellow and brown, 2 insulated crocodile clamps.

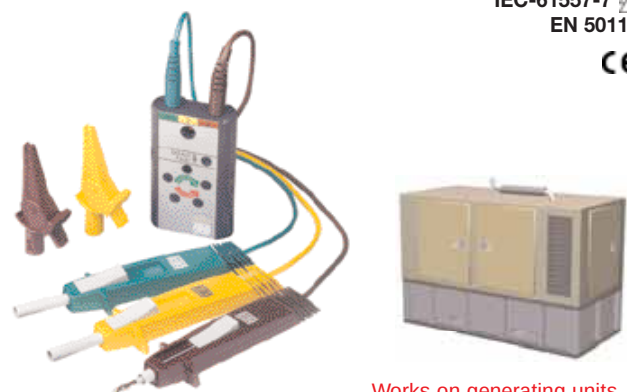

IEC-61557-7
EN 50110

CE

MS-152+

Delivered complete with storage bag
Weight: 0.380 kg - 60 x 100 x 25 mm

Works on generating units

Voltage detectors



Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Contact probes for L.V. tester

To be used only with MS-911-EX or MS-911/2 tester.
For overhead lines
Contact antennas serve as suspension hooks.
Marked with standard colours: black and red.
Total length: 1.25 m.

MS-8014 2 probes, in bag 50 x 130 x 1.300 mm - 0.40 kg



To be used only with MS-911-EX or MS-911/2 tester.
For installations
Round tip contact. Total length: 0.50 m.

MS-8013 2 probes, in bag 50 x 150 x 470 mm - 0.750 kg

Voltage take-off punch

The voltage take-off punch is able to make an insulating piercing on a low voltage wire to plug a measurement device.
Fit with pin or safety test probe with 4 mm diameter.

Reference	Capacity (Ø mm)	Weight (kg)
MS-62	5.6 - 14.4	0.015
MS-63	12 - 31	0.05



POINTEST™ Safety test probes for voltage detectors

Safety test probe for voltage detector use only.
4 mm retractable shrouded plug, 4 mm standard socket or 1,20 m double sheathed lead, Probe 26 mm length, 1 000 V A.C or D.C, IP2X.

IEC 61010-2-031 
CE

CX-35811 Green safety test probe 1.20 m lead
CX-45211 Brown safety test probe 1.20 m lead
CX-45511 Black safety test probe 1.20 m lead
CX-45411 Yellow safety test probe 1.20 m lead



Safety crocodile clamps

Crocodile clamps.
Fully insulated crocodile clamps with large jaw opening: 20 mm.

IEC 61010-2-031 
CE

CX-01222 5 brown crocodile clamps
CX-01422 5 yellow crocodile clamps
CX-01822 5 green crocodile clamps
DX-02006 2 crocodile clamps - black and red



Insulation tester

The insulation resistance of an installation must be checked periodically and when it is commissioned. Furthermore, a measurement of the insulation resistance of the entire installation (or group of circuits) may be necessary when troubleshooting.

Operating principle

The measurement voltage shall be 500 V DC (for installations operating at 500 V or less) in order to detect any insulation defect between two cables that are normally isolated from each other. The choice of a high test voltage provides an easier means of demonstrating a latent insulation fault (conventional ohmmeters only output a few volts).

An installation is declared to be conform if the insulation resistance is $> 500 \text{ k}\Omega$.

The DT-500 insulation tester provides an easy, fast and safe means of making this measurement.

The insulation tester DT-500 is designed to test in total safety the insulation resistance of a low voltage installation.

DT-500 is equipped with:

- 3 safety test probes IP2X
- 1 red safety test probe (phase)
- 1 Yellow/green safety test probe (earthing)
- 1 blue safety test probe (neutral) raccordable (Fig.3) on a safety plug
- 3 safety crocodile clamps (red, yellow/green and blue).

It enables to test the insulation resistance between each active wire and the earth (Fig.1). For fragiles receptors (electronics), we recommend to use the third blue test probe. In this configuration, the neutral and the phase are linked together which avoids any damage on electronic components (Fig.2).

Insulation resistance test

When the DT-500 is connected to a low voltage switch off installation it output 500 V DC.

Signaling by a blue flashes diode. During the measurment the diodes light up in sequence.

The value is indicated on one of the diodes:

Red between: 0, 300, 400 $\text{k}\Omega$.

Green between: 500, 600, 700, 800, 900, 1000 $\text{k}\Omega$ and ∞ .

Complete safety

The DT-500 is equipped with a safety system. If it is connected on a live installation, a flashes red warning diode light and measurement is impossible.

Technical characteristics

our insulation tester is designed according to standard EN 61557-2.

It also respects international electrical safety standard IEC 61010-1.

- Output voltage 500 V DC.
- Nominal output current at 500 V: 1 mA.
- Measurement range 0 + ∞ .
- IP54, IK06.
- Batteries 4 x LR6.
- Size 213 x 75 x 46 mm.
- Storage temperature: $-25^\circ\text{C}/+70^\circ\text{C}$.
- Usage temperature: $-15^\circ\text{C}/+45^\circ\text{C}$.

CEI 61010-1
EN 61557-2



Fig. 1

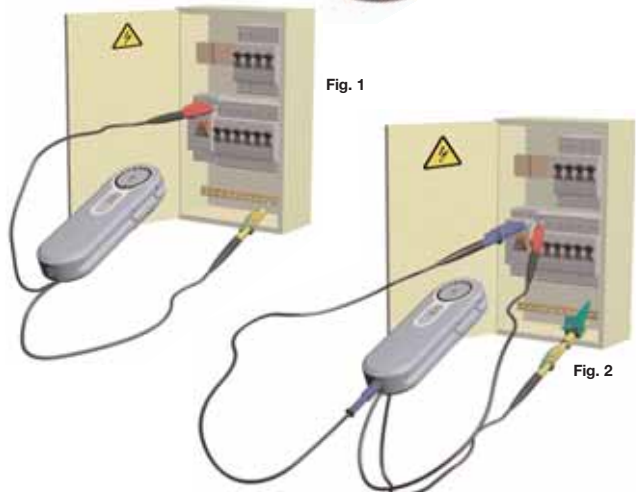


Fig. 2



Fig. 3



M-87-292

DT-500

Delivered complete with batterie, accessories and a storage plastic case
Weigth: 0.6 kg

M-87292

Storage bag for DT-500 - 280 x 180 x 70

Installation testers



Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

CATEX™ NG DT-170 RCDs (Residual Current Devices) tester

The main function of the DT-170 is to test and measure the trip values of RCDs (Residual Differential Devices):

- in trip time (expressed in ms) or
- in trip current value (expressed in mA).

This enables 10mA / 30mA / 300mA and 500mA differential circuit breakers to be tested irrespective of their type (normal or delayed S).

The backlight, dual colour screen immediately informs you whether the values measured are compliant (blue) or not compliant (red). To make your testing missions easier, the DT-170 can be used directly on 2P+T sockets.

Selection of the differential type and measurement type:

Before testing an RD, you must select the characteristics on the display (sensitivity, delayed or not) together with the type of test that you are required to perform (trip time or current).

Comment: The selection can be made with the appliance unconnected (switch on the appliance in this case) or connected to the socket (the appliance then switches on automatically).

- Selecting the RCD sensibility:
- Normal/Delayed selection:
- Selecting 0∞ or 180∞∞
- Selecting the type of test (current or time).

The digital result is shown and the backlighting:

- stays blue if the result is correct
- goes to red if the values are not compliant

This comprehensive appliance can also be used to test the conformity of the network (*Caution, CATEX NG is not a voltage detector), to indicate the phase and to test the connection of the earthing conductor.

Technical characteristics


- 3-digit measurement display
- Operates on a TT neutral and TN system
- Operating voltage: 230 V (Ph/N)-10/+6% 50/60 Hz
- Operating temperature: -15°C/+45°C
- Storage temperature: -25°C/+45°C
- IP40
- Cat III 600 V

- Double insulation
- 7.2 V, 110 mA/H Ni-MH battery
- IEC 61010-1
- IEC 61557-6 NF EN 61557-6
- IEC 61236 (EMC)

Locking and warning signals for 400 V network voltage and contact potential >50V

CEI 61 010-1
NF EN 61557-6

CE



Example of trip time value measure



Example of 400 V tension between phases

DT-170

Dimensions: 71 x 210 x 51 mm
Weight: 360 g



Control over board with M-952271




M-952271

ACCESSORIES

M-952271 Lead set for checks on L.V distribution board (for DT-110/DT-150/DT-300 only)

M-881954 Socket adaptorator UK



Example of trip current value measure

Installation testers

Installation testers identifier

Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Earth and continuity loop controllers CATOHM™

"TT" network

The CATOHM earth and continuity loop controller enables:

- checking electrical resistance level of local earth socket, indicating by LCD display:
 - back lighting blue (1) if the value is above 100 Ω
 - back lighting red (3) if the value is
 - uper than 100 Ω
 - incorrect voltage (2)
 - earth not corrected (2)
- checking the presence and level of voltage at the connection terminals of a live 10/16 A socket,
- checking the integrity of the earth circuit (continuity < 2 Ω), correct polarity (position of the phase and the neutral is indicated),
- checking electrical continuity of metal masses.

Operating voltage: 230V - 10% / + 6%

Frequency: 50/60 Hz

Temperature of use: -15°C/+45°C

IP 40

Fuse protection: 2 fuses 5 x 20 mm,

160 mA, (delayed fuse).

Class II category III

Delivered with wound-up extension.

Weight: 0.340 kg.

Dimensions: 71 x 210 x 51 mm.

IEC 61010-1
EN 61557-4



Figure 1



Figure 2



Figure 3



DT-300

DT-300

For use on schuko socket

ACCESSORIES

- | | |
|-----------|---|
| M-87-292 | Storage bag |
| M-92-2271 | Lead set for checks on L.V distribution board (for DT-110/DT-150/DT-300 only) |
| M-95-1143 | Small 2 parts pole for working at a distance - 0.8 m |
| M-92-1647 | Wound-up extension |



Figure 4



M-87292



M-92-1647



M-952271



M-951143

Installation testers



Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Digital multimeter- Cat III 600 V

This digital multimeter is compact 3 1/2 digit. For measuring DC and AC voltage and current, resistance, continuity and temperature.

- AC frequency response: 40 - 400 HZ
- DC voltage: 200 mV/2 V/20 V/200 V/600 V
- AC voltage: 200 mV/2 V/20 V/200 V/600 V
- DC current: 200 μ A/2000 μ A/200 mA/2 A/10 A
- AC current: 200 μ A/2000 μ A/200 mA/2 A/10 A
- Resistance: 200 Ω /2 k Ω /20 k Ω / 200 k Ω /2 M Ω /20 M Ω
- Capacitance: 20 μ F 200 μ F/2 μ F/20 μ F/200 μ F/1000 μ F

General specifications

- 3 1/2 digital multimeter, 30 ranges, 70 x 50 mm LCD display, 1999 counts max.

- Back light, data hold

- Diode, triode performance testing, continuity test (audible)

General characteristics

- Battery: 3 x 1.5 V AAA batteries
- Low battery indication level on LCD
- Operation temperature: 0°C / 40°C, < 75%RH
- Storage temperature: -10°C / 50°C, < 85%RH



CE

MX-701

158 x 75 x 35 mm - Weight: 200 g

Digital clamp meter - Cat III 600 V

This digital clamp meter is compact 3 1/2 digit.

Autorange for measuring DC and AC voltage, AC current, resistance, diode, continuity and temperature.

AC current: 2 A - 600 A.

AC voltage: 2 V - 600 V. DC voltage: 0.2 V - 600 V.

Resistance: 200 Ω - 20 M Ω . Continuity: buzzer (< 50 Ω).

Temperature range: -40°C/+1000°C -40°F/-1832°F.

General specifications

- Display: 3 1/2 digit LCD with a max. reading of 1999
- Polarity: auto polarity indication
- Overrange indication: "OL" or "-OL"
- Automatic zeroing function
- Sensor: clamp-shape transformer for AC measurement
- Jaw opening capability: $\varnothing$ 36 mm
- Max. measurable conductor: $\varnothing$ 30 mm

General characteristics

- Battery: 2 x 1.5 V AAA batteries
- Low battery indication
- Operation temperature: 0°C / 40°C, < 75% RH
- Storage temperature: -20°C / 60°C, < 85% RH



CE

MX-702

190 x 70 x 38 mm - Weight: 220 g

POINTEST™ Safety test probes for multimeter and clamp-meter

Safety test probes for multimeter and clamp-meter use only.

4 mm retractable shrouded plugs, 4 mm standard

socket or 1.20 m double sheathed lead,


Probes 26 mm length, 1 000 V A.C or D.C, IP2X.

DX-02001

Set of 2 contact probes, black and red with socket

DX-02002

Set of 2 contact probes, black and red 1.20 m lead

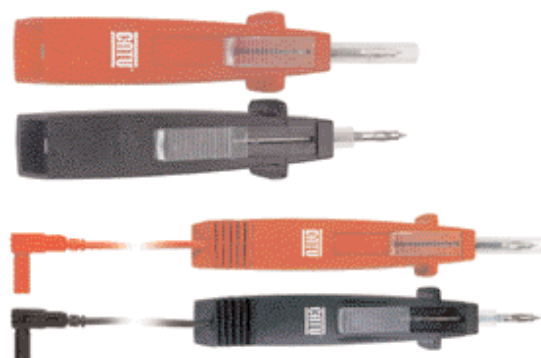

Installation testers

Infrared Thermometer

Below 1000V

Voltage detectors

Voltage detectors accessories

Insulation tester

Installation testers identifier

Multimeter clamp-meter

Infrared Thermometer

Infrared Thermometer

MX-704 is a thermometer based on the infrared technology. It is particularly adapted to detect the abnormally warm points in the electrical installations.

IEC 61000-4-2 
IEC 61000-4-8 
EN 61326
CE

Technical characteristics:

- Temperature range: -20/+500°C
- Accuracy: $\pm 2^{\circ}\text{C}$ from -20°C to 100°C
- Distance/Spot ration: 8:1
- Thermopile: 5-14 μm
- Resolution: 0.2°C
- Battery type: 9V



MX-704

150 x 133 x 45 mm - Weight: 135g



Low voltage product display

Protective equipment

Warning signs

Safety padlocks

Voltage detectors

Insulated tools 1000V

The major products are now at your electrical dealer's

Short-circuiting and earthing systems

Overhead lines systems

Below 1000V

Overhead lines systems

Consumer units system

Jumper cables

Short-circuiting systems for bare L.V. overhead lines

For conductors: 3 - 15 mm Ø.

Easily attached by snapping on with a firm downward pull.

Released by lateral swinging, no need to push upwards.


First grip installed by insulating stick.

First clamp/stick connection has automatic ratchet.

Waterproof bag.

To be completed with earthing equipment. See page 32.

IEC 61230

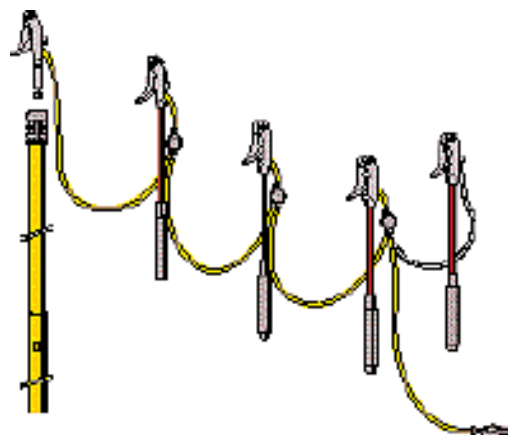

Packaging: waterproof bag 250 x 85 x 1 160 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Number of clamps	Insulated telescopic stick
MT-404	3	16	3.4	3 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-405	3	16	3.8	4 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-406	3	16	4.2	5 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m
MT-407	3	16	4.6	6 MT-411/1 MT-411-C	CE-2-21-C/length: 2 m


Short-circuiting and earthing systems

Lowlock system:

For conductors 3 to 21 mm Ø.

With clamps type "snap-on/screw-on".

Connecting cables: 35 mm² copper.

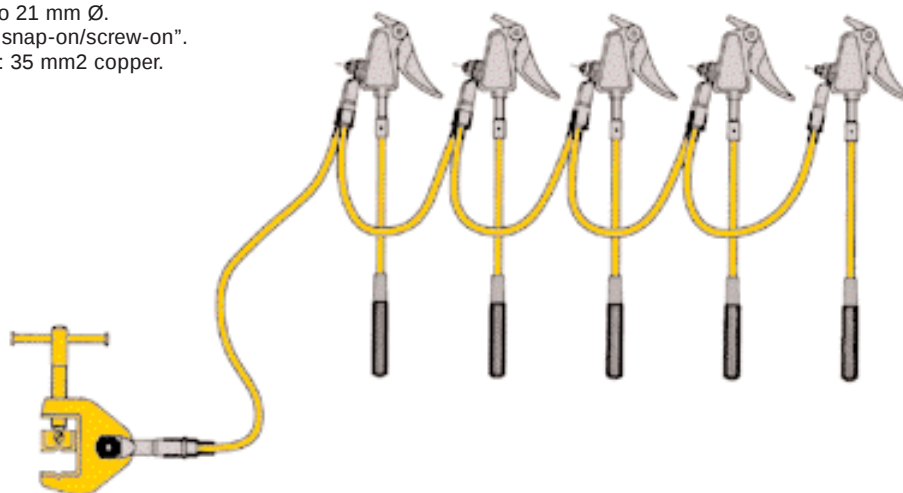

Reference	Rating (kA/1s)	Weight (kg)	Composition
MT-615/1-7,5	7.5	3	5 MT-616/1-03 contact clamps on handles (l = 0.35 m each) 4 braids of M-24-35 copper cable (1.00 m) 1 M-87-153 carrying bag 250 x 85 x 750 mm
MT-615/2-7,5	7.5	6.5	5 MT-616/1-03 contact clamps on handles 4 braids of M-24-35 copper cable (1.00 m) 1 braid of M-24-35 copper cable (7.00 m) 1 MT-840/1 earth clamp

For other models, please consult us.

Short-circuiting and earthing systems

Overhead lines systems

Below 1000V

Overhead lines systems


Consumer units system

Jumper cables

Short-circuiting systems for insulated L.V. overhead lines

Connected to female sockets permanently installed on power lines.
Equipment includes either 5 or 6 copper-aluminium alloy stubs with bayonet locking and insulating cap.
To be completed with earthing equipment. See below.

IEC 61230 
CE

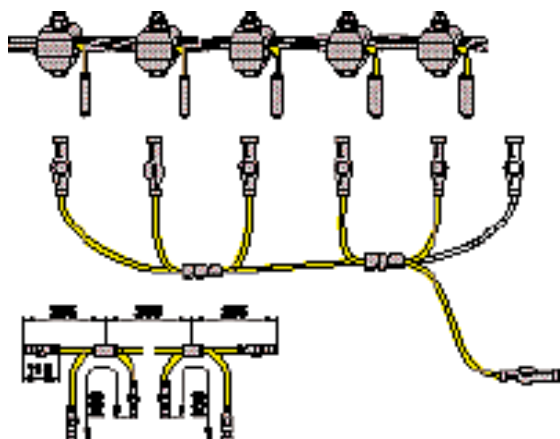

Packaging: polypropylene case - 234 x 215 x 75 mm.

Reference	Rating (kA/1s)	Short-circuit cables (mm ²)	Weight (kg)	Composition
MT-205	4	16	1.10	5 stubs
MT-206	4	16	1.50	6 stubs
MT-207	4	16	1.9	7 stubs

Earthing equipment

Earthing equipment with bayonet splicing.
Earth rod to be ordered separately.
See below.



Reference	Weight (kg)	Cable (m x mm ²)	Earth clamp
MT-244	2.5	10 x 10	MT-841
MT-245	3.0	10 x 16	MT-840/1
MT-248	3.0	15 x 10	MT-841
MT-249	3.8	15 x 16	MT-840/1



Packaging: polypropylene case - 234 x 215 x 75 mm.

Earth rod

For use with earthing equipment
Hexagonal 18 mm per side.
Galvanized steel.



MT-650 Length: 1 m - Weight: 2.2 kg

Short-circuiting and earthing systems

Consumer units
system

Jumper cables

Below 1000V

Overhead lines systems

Consumer units system

Jumper cables

Short-circuiting system for consumer units

The link assemblies, included in this equipment, consist of extra flexible 16 mm² multistrand copper cable with an IEC 1230 silicone envelope, recommended for indoor equipment.

The elements contained in the case can be used for establishing the equipment suited to the unit to be processed.

The cartridge equipment is intended for HBC 22 x 58 mm fuse cartridge connection boxes and knife cartridges size 00.

The knife equipment is intended for connection boxes or knife switch networks.

The mini-clip equipment is designed for the short-circuiting of take-off boxes more particularly using intermediate parts (sockets with 10 mm Ø terminals and M8 hexagonal end).

The standard equipment for a three phase installation includes: the sets of cartridges, knives or mini-clips for adaptation to any type of unit, the interconnecting assemblies consisting of 4 extra flexible 16 mm² copper cables connected at the center by a connector, 1 installation and crimping kit.

Rating: 4 kA/1s

Weight: 4.3 kg.



Reference	Composition
MC-290/2	8 cartridges 8 cartridges type "00" 8 clamps 8 M8 connections 2 (280 x 320 mm) cable connections 2 (370 x 440 mm) cable connections 1 M8 key wrench 1 right angle hexagonal key wrench 4 mm 1 13/17 and 14 mm open end spanner 1 handle MC-161

Short-circuiting system for L.V equipment ISOSTOP™ system

Rating: 6 kA/1S

Standard equipment composition: 1 or 2 sets of 3 knives, cables connections: H07 RN-F 25 mm², 1 earth clamp MT-841
1 handle MC-161.

Reference	Composition	Weight (kg)
MC-165/40	3 MC-160 earth cable 0.60 m	4.00
MC-175/40	3 MC-115 earth cable 0.60 m	3.75
MC-166/40	3 MC-115 3 MC-160 earth cable 0.60 m	5.60
MC-166/60	3 MC-115 3 MC-160 earth cable 6 m	7.50



Jumper cable with clamps on insulated handle

2 clamps on insulated handle - MT-315

Capacity (mm): Ø 4 - 27 - 40

Cable connection: 35 mm²

Rating: 6 kA/1s

Continuous rating: 75 A

Clamp material: copper aluminium alloy

1 insulated cable

Length: 1 m, Section: 25 mm².

MT-315/2	Dimensions: 40 x 60 x 910 mm - Weight: 0.530 kg
----------	---



LOW VOLTAGE

Short-circuiting and earthing systems

Consumer units
system

Below 1000V

Overhead lines systems

Consumer units system

Jumper cables


Short-circuiting equipment

Connecting set formed by extra flexible multi-strand copper cables
16 mm² with silicon sheath according IEC-61230.
Wide use temperature range (-40°C, +70°C).
No toxic smokes emission in case of short circuit.

IEC 61230 

Reference	Designation
MC-296-440	Connection set 440 + 370 mm*
MC-296-320	Connection set 320 + 280 mm*

* Other models and length on request.

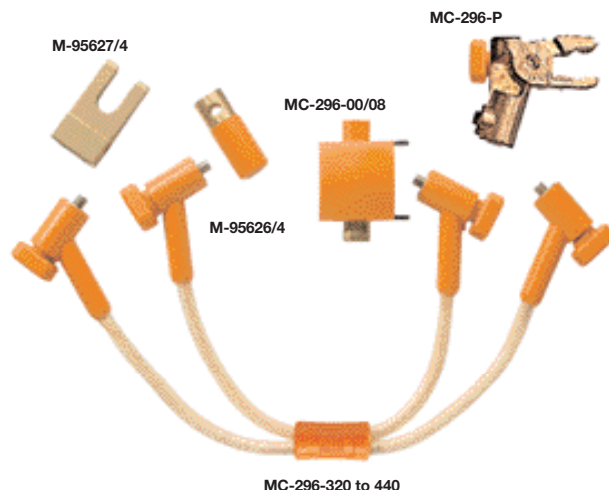

Set of: cartridge, connecting blade and jumper clamp.

Reference	Designation
M-95627/4*	Connecting blade
M-95626/4*	Round cartridge HPC 22 x 58
MC-296-00/08/4*	Cartridge size 00
MC-296-P/4*	Jumper clamp


Case (340 x 250 x 80 mm) for specific set. Réf.: M-91209.

* Set of 4.

MC-161	Manceuvring handle
--------	--------------------

Case (340 x 250 x 80 mm) for specific set. Réf.: M-91209.

MC-296-115/12 or MC-296-115/08

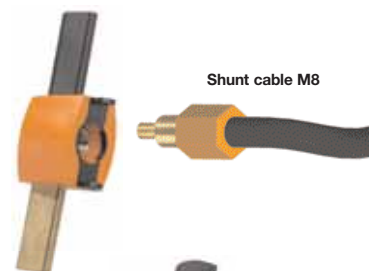

Shunt cable M8

MC-161

MC-296-160/12

Connection set M8 or M12



Connecting blades M8 or M12


Reference	Designation
MC-296-115/08/4*	Between axes 115 mm M8
MC-296-115/12/4*	Between axes 115 mm M12
MC-296-160/12/4*	Between axes 160 mm M12

* Set of 4.

To be used with jumper cable (M8 or M12) connection cable
(on request).

Additional equipment:

- Jumper cable (see page 41)
- Threated adapter (see page 42)

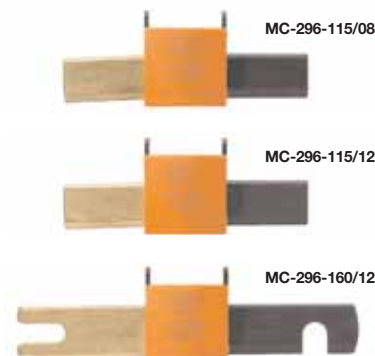

Short-circuiting and earthing systems

Jumper cables

Below 1000V

Overhead lines systems

Consumer units system

Jumper cables

Mini jumper clamps fully insulated for switchboard use

These clamps are specially designed for use on energized parts in LV installations (switchboards, etc.) to make temporary connections when limited space is available. Models with jaws designed to axially grip conductors can be used on threaded bolts or shanks and nuts. The MC-142 model, whose size has been reduced to the strict minimum, is designed to be tightened with a nut wrench. All other models in this series tighten with T-handle screw. All clamps receive cable terminals with ISO 8 mm pitch threading as in the MC-153 series (described below). Current rating: 200 A.



Reference	Clamp capacity to main conductor	Orientation with respect	Size (mm)	Weight (kg)
MC-141	Six-sided 17-19 mm		71 x 150 x 24	0.26
MC-142	Round 6-10 flat 0-5 mm	Axial (at cable end) + transversal	58 x 38 x 33	0.130
MC-142/1	With handle. Round 6-10 flat 0-5 mm	Axial (at cable end) + transversal	58 x 38 x 33	0.140
MC-143	Flat bar, thickness 2-25 mm		67 x 145 x 26	0.230
MC-144	Round 8-12 square 9-10 mm	Axial (at cable end)	150 x 75 x 23	0.280
MC-145	16-75 mm ²	Transversal	110 x 70 x 23	0.220
MC-146	38-240 mm ²	Transversal	110 x 70 x 23	0.230
MC-147	Threaded rod M8		66 x 98 x 25	0.18
MC-147/1	Threaded rod M10		66 x 98 x 25	0.195
MC-148	Clamp with tapped revolving rod end M8, 200 A shunt. To be used with an insulated six-sided male hex key 5 mm.		66 x 80 x 25	0.175
MC-148/1	Clamp with tapped revolving rod end M8 for 10 to 50 mm cable		66 x 80 x 25	0.175
MC-149	Bar 20-30 mm width		56 x 165 x 58	0.486

Jumper cables with threaded ferrules

To be used in conjunction with any of the clamps described above to make jumper equipment suit most any need both quickly and easily. Cable is IEC-60245 type, either 35 mm² current rating: 200 A or 50 mm² current rating: 250 A, depending on the models. Delivered with screwing ISO M8.



Section: 50 mm²

Section: 35 mm²

MC-153/05	Length: 0.50 m - Weight: 0.270 kg
MC-153/10	Length: 1.00 m - Weight: 0.570 kg
MC-153/30	Length: 3.00 m - Weight: 1.720 kg
MC-153/60	Length: 6.00 m - Weight: 3.460 kg

MC-155/05	Length: 0.5 m - Weight: 0.380 kg
MC-155/10	Length: 1.00 m - Weight: 0.760 kg
MC-155/20	Length: 2.00 m - Weight: 1.520 kg
MC-155/30	Length: 3.00 m - Weight: 2.280 kg
MC-155/60	Length: 6.00 m - Weight: 4.560 kg
MC-155/80	Length: 8.00 m - Weight: 6.080 kg

Short-circuiting and earthing systems

Jumper cables


Below 1000V

Overhead lines systems

Consumer units system

Jumper cables


Jumper cable with insulated jumper clamps

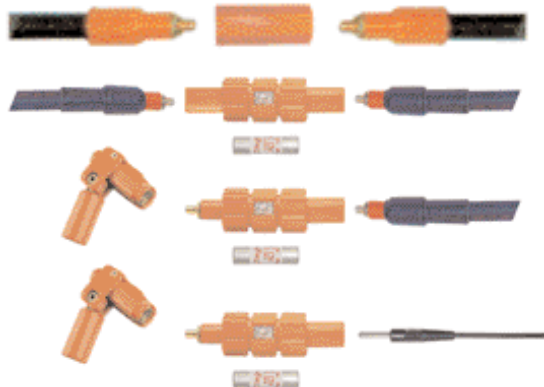

Reference		Size (mm)	Weight (g)
MC-121	Junction for shunt M8	Hexa. 22 L60	0.055
MC-122	Fuse holder for shunt	Ø 35 L125	0.130
MC-123	Fuse holder for shunt	Ø 35 L125	0.140
MC-124	Fuse holder for clamps	Ø 35 L125	0.140

Threaded adapter


Cylindrical body diameter 10 mm to fits on panel network thread.
Total length 50 mm.

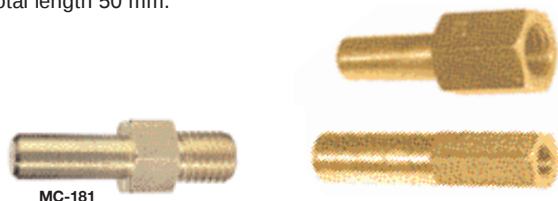

MC-181	4 adapters for short-circuiting - M12 Weight: 0.05 kg
MC-182	4 adapters M8 Width: 50 x 10 mm – Weight: 0.027 kg
MC-183	4 adapters M12 Width: 50 x 17 mm – Weight: 0.048 kg

Tap off box

The tap off box allows on each side to connect 3 by pass jumpers type MC-153/... is delivery equipped with six removable fittings type MC-156/1 and an insulating wrench. This item in conjunction with by pass jumpers allows to shunt a tap off box by means of a second tap off box. Current rating 200 A.

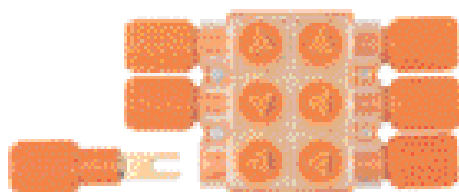

MC-156	40 x 80 x 158 mm
MC-156/1	Spare part
MO-237-D	Triangular spanner with T handle

Jumper cable with insulated jumper clamps

2 clamps MC-120
Spring tightening. Connector for 8 mm cable Ø.
Tightening capacity: 12 mm (diameter - flat).
Rated insulation: 1 500 V. Rating 5 (kA/1s).
Continuous rating 75 A. 1 insulated cable
25 mm² section.



Reference	Cable length (m)	Weight (kg)
MC-120/15	1.50	0.850
MC-120/50	5.00	1.950
MC-120/100	10.00	4.000

Shunt Telescopic probe

This probe is completely insulated through the end, and includes a retractable shroud containing a 10 mm diameter copper braided stem that connects to device terminals and network connector boards. The female screw socket allows attachment to shunt cables. Nominal current: up to 250 A.




MC-126	Connector with insulated probe 1.5 to 16 mm In 60 A - 65 x 185 x 29 - 0.130
MC-126/1	Connector with insulated probe 10 to 70 mm In 100 A - 65 x 185 x 29 - 0.166



MC-150	Ø 33 mm L 180 mm - Weight: 0.160 kg
--------	-------------------------------------

Jumper connecting box with fuse

The shunt for collective channeling is a box used to make sure, before proceeding to the replacement of/removing a molten fuse situated on a channeling, that the defect which brought about the molten is eliminated. This box is used with a fuse when the (nominal) assigned intensity of the channeling is < 100 A and with 2 fuses when this intensity is included between 100 A and 200 A. It can also be used to open a circuit in load, for example to change a damaged accessory such as a pin.



MC-116	Shunt for collective channeling from 30 to 200 A
--------	---

Bimaterial insulated tools

Screwdrivers

Below 1000V

Screwdrivers

Cutters and pliers

Tool sets


ISOMIL™ 2



1000 V
IEC60900 EN60900

The new range of bimaterial insulated tools for live working up to 1 000 Volts according to IEC 60900 standard.

Each ISOMIL tool is controlled and tested to 10 000 volts. This ensured by strict quality control procedures.

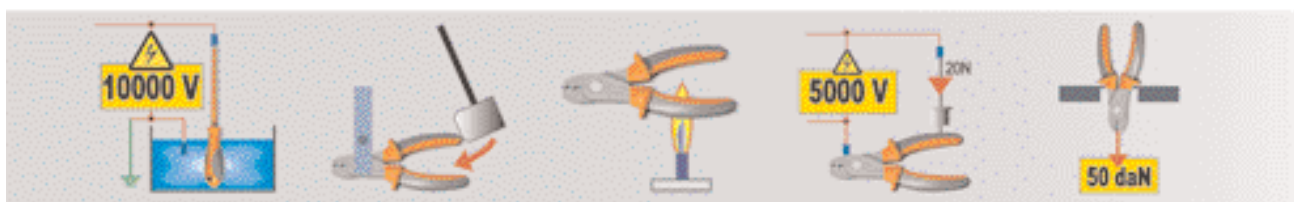

Flat blade screwdrivers

Chrome - molybdenum vanadium steel blade.



Reference	Characteristics	Weight (g)
MO-72003	Blade 3 x 100 mm	40
MO-72004	Blade 3.5 x 100 mm	43
MO-72005	Blade 4 x 100 mm	58
MO-72006	Blade 5.5 x 125 mm	76
MO-72007	Blade 6.5 x 150 mm	112
MO-72009	Blade 8 x 175 mm	171



POZIDRIV screwdrivers

Chrome - molybdenum vanadium steel blade.



Reference	Characteristics	Weight (g)
MO-72040	n°0 head 3 x 60 mm	37
MO-72042	n°1 head 4.5 x 80 mm	58
MO-72044	n°2 head 6 x 100 mm	91
MO-72046	n°3 head 8 x 150 mm	170



Bimaterial insulated tools

Cutters
and pliers

Below 1000V

Screwdrivers

Cutters and pliers

Tool sets

Universal plier

Special steel, chrome mat finished.

Reference	Length (mm)	Cutting capacity	Weight (g)
MO-72102	180	For copper and aluminium Ø max (mm): 2.5	255



Bent snipe nose plier

Special steel, chrome mat finished.

Reference	Length (mm)	Cutting capacity	Weight (g)
MO-72142	160	For copper and aluminium Ø max (mm): 2.5	140



Flat nose plier

Special steel, chrome mat finished.

Reference	Length (mm)	Weight (g)
MO-72132	160	140



Round nose plier

Special steel, chrome mat finished.

Reference	Length (mm)	Weight (g)
MO-72122	160	140



Side cutter

Special steel, chrome mat finished.

Reference	Length (mm)	Cutting capacity	Weight (g)
MO-72162	160	For copper and aluminium Ø max (mm): 4.0	212



Cable cutter

Special steel, chrome mat finished.

Reference	Length (mm)	Cutting capacity	Weight (g)
MO-72200	160	For copper and aluminium Ø max (mm): 5.0	238



Wire stripping plier

Special steel, chrome mat finished.

Reference	Length (mm)	Cutting capacity	Weight (g)
MO-72172	160	For copper and aluminium Ø max (mm): 5.0	166



Water pump plier

Special steel.

Reference	Length (mm)	Weight (g)
MO-72155	250	347



Bimaterial insulated tools



Tool sets

Below 1000V

Screwdrivers

Cutters and pliers

Tool sets

Screwdrivers kit

Reference	Composition
KIT-23	MO-72004 Flat blade screwdriver 3.5 x 100 mm
	MO-72006 Flat blade screwdriver 5.5 x 125 mm
	MO-72009 Flat blade screwdriver 8 x 175 mm
	MO-72042 Pozidriv screwdriver n°1 4.5 x 80 mm
	MO-72044 Pozidriv screwdriver n°2 6 x 100 mm



Pliers kit

Reference	Composition
KIT-27	MO-72102 Universal plier 180 mm
	MO-72155 Water pump plier 250 mm
	MO-72172 Wire stripping plier 160 mm
	MO-72142 Bent snipe nose plier 160 mm
	MO-72200 Cable cutter 170 mm



Intervention kit

Reference	Composition
KIT-24	MO-72004 Flat blade screwdriver 3.5 x 100 mm
	MO-72006 Flat blade screwdriver 5.5 x 125 mm
	MO-72009 Flat blade screwdriver 8 x 175 mm
	MO-72042 Pozidriv screwdriver n°1 4.5 x 80 mm
	MO-72044 Pozidriv screwdriver n°2 6 x 100 mm
	MO-72172 Wire stripping plier 160 mm
	MO-72142 Bent snipe nose plier 160 mm
	MO-72200 Cable cutter 160 mm



Complete intervention kit

Reference	Composition
KIT-25	MO-72004 Flat blade screwdriver 3.5 x 100 mm
	MO-72006 Flat blade screwdriver 5.5 x 125 mm
	MO-72009 Flat blade screwdriver 8 x 175 mm
	MO-72042 Pozidriv screwdriver n°1 4.5 x 80 mm
	MO-72044 Pozidriv screwdriver n°2 6 x 100 mm
	MO-72102 Universal plier 180 mm
	MO-72155 Water pump plier 250 mm
	MO-72172 Wire stripping plier 160 mm
	MO-72142 Bent snipe nose plier 160 mm
	MO-72200 Cable cutter 160 mm



Insulated tools

Screwdrivers

Below 1000V

Screwdrivers

Pliers


Cutters and pliers

Wrenches, spanners and sockets

Tool sets



Complete range of insulated tools for live working up to 1 000 Volts according to IEC 60900 standard.
Each ISOMIL tool is controlled and tested to 10 000 volts.
This ensured by strict quality control procedures.

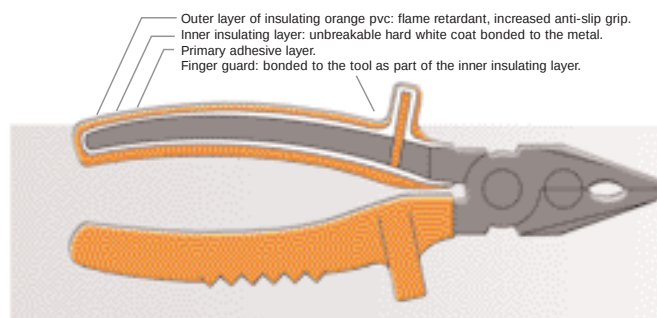

Phase tester insulated screwdriver

Phase detection from 127 V A.C.
Maximum voltage use: 1000 V.
Signaling by intermittent lighting through ultra high intensity diode.
Works with an unremovable lithium battery (life time guarantee 3 years). Frequency: 50/60 Hz.

Reference	Characteristics	Weight (g)
MO-65222	Flat blade 4 x 85 mm	65



Patented

Flat blade screwdrivers

Chrome - molybdenum vanadium steel blade.

Reference	Characteristics	Weight (g)
MO-65203	Blade 3 x 100 mm	33
MO-65204	Blade 3.5 x 100 mm	37
MO-65205	Blade 4 x 100 mm	46
MO-65206	Blade 5.5 x 125 mm	75
MO-65207	Blade 6.5 x 150 mm	94
MO-65209	Blade 8 x 175 mm	165
MO-65211	Blade 10 x 200 mm	195
MO-652-D	Set of 4 screwdrivers 3 x 100 - 4 x 100 6.5 x 100 - 8 x 175	310



POZIDRIV screwdrivers

Chrome - molybdenum vanadium steel blade.

Reference	Characteristics	Weight (g)
MO-65240	n°0 head 3 x 60 mm	25
MO-65242	n°1 head 4.5 x 80 mm	50
MO-65244	n°2 head 6 x 100 mm	75
MO-65246	n°3 head 8 x 150 mm	150
MO-65248	n°4 head 10 x 200 mm	230



PHILLIPS screwdrivers

Chrome - molybdenum vanadium steel blade.

Reference	Characteristics	Weight (g)
MO-65230	n°0 head 3 x 60 mm	25
MO-65232	n°1 head 4.5 x 80 mm	50
MO-65234	n°2 head 6 x 100 mm	75
MO-65236	n°3 head 8 x 150 mm	150
MO-65238	n°4 head 10 x 200 mm	230
MO-653-D	Set of 3 screwdrivers n°0, n°2, n°3	230



Insulated tools



Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets


Tool sets

Universal pliers

Special steel, oil-hardened. Burnished head.

Reference	Overall length (mm)	Weight (g)
MO-66001	160	210
MO-66002	180	260
MO-66003	200	300
MO-66005*	250	510

* New England style

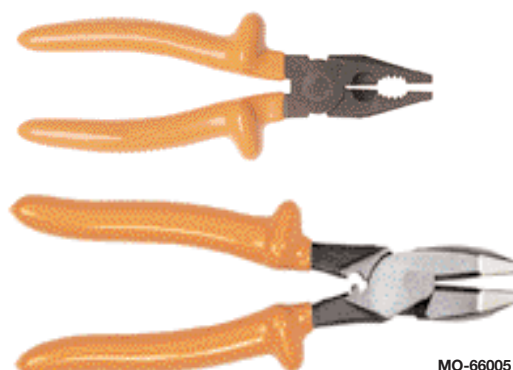

Flat nose pliers

Special steel, oil-hardened. Burnished head.

Reference	Overall length (mm)	Weight (g)
MO-66300	145	115
MO-66302	160	160



Round nose plier

Special steel, oil-hardened. Burnished head.

Reference	Overall length (mm)	Weight (g)
MO-66202	160	150



Bent snipe nose pliers

Chrome-vanadium steel. Burnished head.

Reference	Overall length (mm)	Weight (g)
MO-66402	160	160
MO-66404	200	185



Long nose pliers with side cutter

Special steel, oil-hardened. Burnished head.

Reference	Overall length (mm)	Weight (g)
MO-66102	160	145



LOW VOLTAGE

Insulated tools

Pliers		Cutters and pliers		Below 1000V	
Screwdrivers	Pliers	Cutters and pliers	Wrenches, spanners and sockets	Tool sets	

Plug plier for preinsulated pin terminals

Chrome-vanadium steel for pin terminals 2.8/5/6.35 mm.

Reference	Overall length (mm)	Weight (g)
MO-66105	200	200



Waterpump plier

Chrome-vanadium steel. Burnished head.

STANDARD

Reference	Overall length (mm)	Weight (g)
MO-66502	250	410



Side cutters

Special carbon steel, oil-hardened. Burnished head.


Reference	Overall length (mm)	Cutting capacity (mm)		Weight (g)
		Soft 80 kg/mm ²	Hard 140 kg/mm ²	
MO-67101	140	Ø 2	Ø 1	150
MO-67102	160	Ø 2.5	Ø 1.5	180
MO-67103	180	Ø 3	Ø 2.5	210



End cutting pliers

Special carbon steel, oil-hardened. Burnished head.

Reference	Overall length (mm)	Cutting capacity (mm)		Weight (g)
		Soft 80 kg/mm ²	Hard 140 kg/mm ²	
MO-67401	140	Ø 2	Ø 1	165
MO-67402	160	Ø 3	Ø 2	210
MO-67404	200	Ø 4	Ø 3	450

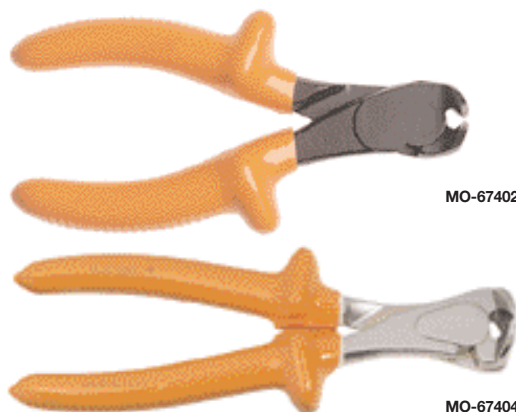

MO-67402

MO-67404

Cable cutter

Chrome-vanadium forged steel oil-hardened.

Reference	Overall length (mm)	Cutting capacity (mm)	Weight (g)
MO-67500	170	Maximum Ø 4	420



Insulated tools



Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets


Cable cutters

Chrome-vanadium forged steel oil-hardened.

Reference	Overall length (mm)	Cutting capacity (mm)	Weight (g)
MO-67501	170	Maximum Ø 15	285
MO-67502	230	Maximum Ø 20	520



MO-67501

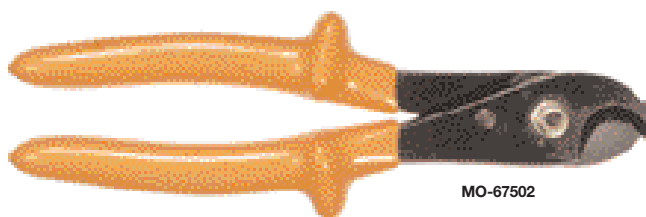

MO-67502

Ratchet cable cutters

For copper and aluminium cables only. Treated forged steel blade.

Reference	Cutting capacity	Weight (g)
MO-67599	Ø 32 mm/180 mm ² Cu 250 mm ² Al	900
MO-67600	Ø 38 mm/240 mm ² Cu 300 mm ² Al	950
MO-67601	Ø 55 mm/300 mm ² Cu 450 mm ² Al	975



MO-67599



MO-67600

Frontal ratchet cable cutter

For copper and aluminium only. Treated forged steel blade.

Reference	Cutting capacity	Weight (g)
MO-67611	Ø 32 mm 180 mm ² Cu 250 mm ² Al	900



Hacksaw

Protected hard forged steel. Two blade positions. Flush and 90° cutting supplied. Delivered with 2 blades.

Reference	Blade length (mm)	Overall length (mm)	Weight (g)
MO-64502	300	450	780



Insulated tools

Cutters and pliers

Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Stripping plier for L.V. cables

Aluminium casting plier.
To strip L.V. twisted cables.

Reference	Overall length (mm)	Stripping capacity	Weight (g)
MO-67304	220	from 16 to 150 mm ²	470



Stripping pliers for L.V. cables

Aluminium casting plier. To strip L.V. cables.

Reference	Overall length (mm)	Stripping capacity (mm ²)	Weight (g)
MO-67305	265	From 16 to 150	650
MO-67306	270	From 50 to 240	670



Wire stripping plier

Chrome vanadium steel. Burnished head.

Reference	Overall length (mm)	Capacity (mm ²)	Weight (g)
MO-67302	160	0.6 to 10	170



Stripping knives

Delivered with pouch.

Reference	Blade length (mm)	Overall length (mm)	Weight (g)
MO-61001	62 (Straight)	190	110
MO-61002	50 (Curve)	190	110



Electrician's scissors

Stainless steel blades.
Softgrip handles.
Adjustable screw joint.
Non insulated tool.

Reference	Overall length (mm)	Weight (g)
MO-72100	145	62



Insulated tools



Below 1000V

Adjustable spanners

Special steel, oil-hardened.


Reference	Overall length (mm)	Maximum capacity (mm)	Weight (g)
MO-69002	210	24	295
MO-69003	250	28	450
MO-69004	310	34	550
MO-69005	385	43	1 350



Reversible hexagonal ratchet handles

Special steel, oil-hardened.


Reference	Size (mm)	Weight (g)
MO-69210	10	160
MO-69213	13	190
MO-69216	16	350
MO-69217	17	370
MO-69218	18	380
MO-69219	19	390

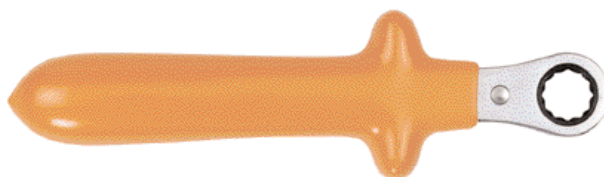

Combination wrenches

Special steel sockets.

Reference	4 hexagonal sockets	Weight (g)
MO-68701	6-8-10-12 mm/150 x 150 mm	225
MO-68702	8-10-12-14 mm/150 x 150 mm	260
MO-68703	7-9-11-13 mm/150 x 150 mm	250
MO-68704	8-10-13-17 mm/150 x 150 mm	260

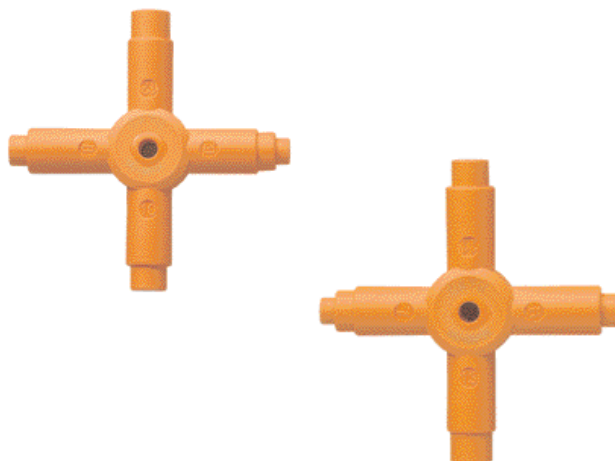

Right angle hexagonal key wrenches

Chrome-vanadium steel.

Reference	Hexagonal head	Weight (g)
MO-69903	3 mm/83 x 123 mm	30
MO-69904	4 mm/84 x 124 mm	40
MO-69905	5 mm/84 x 126 mm	50
MO-69906	6 mm/85 x 126 mm	70
MO-69908	8 mm/87 x 128 mm	110
MO-69910	10 mm/87 x 130 mm	150
MO-69912	12 mm/90 x 132 mm	240



Insulated tools

Wrenches, spanners
and sockets

Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Open end spanners

Chrome-vanadium steel.

Reference	Size (mm)	Weight (g)	Reference	Size (mm)	Weight (g)
MO-68008	8	40	MO-68020	20	185
MO-68009	9	40	MO-68021	21	200
MO-68010	10	45	MO-68022	22	220
MO-68011	11	50	MO-68023	23	250
MO-68012	12	60	MO-68024	24	260
MO-68013	13	80	MO-68025	25	280
MO-68014	14	100	MO-68026	26	300
MO-68015	15	110	MO-68027	27	340
MO-68016	16	120	MO-68028	28	360
MO-68017	17	140	MO-68029	29	400
MO-68018	18	160	MO-68030	30	500
MO-68019	19	170	MO-68032	32	570

Reference	Characteristics	Weight (g)
MO-68008/19	8 open end spanners set 8/10/11/12/13/ 14/17/19 mm	685



Cranked ring wrenches

Chrome-vanadium steel.


Reference	Size (mm)	Weight (g)	Reference	Size (mm)	Weight (g)
MO-68107	7	35	MO-68120	20	240
MO-68108	8	40	MO-68121	21	260
MO-68109	9	45	MO-68122	22	260
MO-68110	10	50	MO-68123	23	270
MO-68111	11	65	MO-68124	24	280
MO-68112	12	80	MO-68125	25	300
MO-68113	13	100	MO-68126	26	360
MO-68114	14	120	MO-68127	27	400
MO-68115	15	150	MO-68128	28	440
MO-68116	16	180	MO-68129	29	480
MO-68117	17	190	MO-68130	30	500
MO-68118	18	195	MO-68132	32	540
MO-68119	19	200			



Hexagonal spanners with T handle

Chrome steel. length 130 mm

Reference	Size (mm)	Weight (g)
MO-68610	10	145
MO-68613	13	185
MO-68614	14	220



Insulated tools



Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Sockets wrenches sets

Chrome steel.



Sockets 3/8" (9.53 mm)-6 sided

Reference	Characteristics (mm)	Weight (g)
MO-69306	Socket 6	25
MO-69307	Socket 7	30
MO-69308*	Socket 8	30
MO-69309	Socket 9	30
MO-69310*	Socket 10	35
MO-69311	Socket 11	35
MO-69312*	Socket 12	35
MO-69313*	Socket 13	45
MO-69314*	Socket 14	45
MO-69315	Socket 15	50
MO-69316	Socket 16	55
MO-69317*	Socket 17	60
MO-69318	Socket 18	65
MO-69319*	Socket 19	70
MO-69321*	Socket 21	85
MO-69322*	Socket 22	90
MO-69323*	Socket 23	100
MO-69513*	Reversible ratchet	600
MO-69523*	Extension 130	124
MO-69533	Extension 250	270
MO-69542	T wrench 130	220
MO-69543	T wrench 200	380
MO-69308/23	complete sockets set in plastic box 410 x 120 x 75	1 250

* Sockets composing the sets

Sockets 1/2" (12.7 mm)-12 sided

Reference	Characteristics (mm)	Weight (g)
MO-69408*	Socket 8	60
MO-69410*	Socket 10	60
MO-69411	Socket 11	60
MO-69412*	Socket 12	70
MO-69413*	Socket 13	70
MO-69414*	Socket 14	70
MO-69415	Socket 15	75
MO-69416	Socket 16	75
MO-69417	Socket 17	80
MO-69418	Socket 18	80
MO-69419*	Socket 19	85
MO-69420	Socket 20	90
MO-69421*	Socket 21	100
MO-69422*	Socket 22	100
MO-69423*	Socket 23	115
MO-69424	Socket 24	130
MO-69430	Socket 30	160
MO-69514*	Reversible ratchet	600
MO-69524*	Extension 125	250
MO-69534	Extension 250	435
MO-69544	T wrench 300	520
MO-69408/23	complete sockets set in plastic box 410 x 120 x 75	1 500

* Sockets composing the sets

Insulated tools



Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Insulated torque wrench 3/8"

Capacity: 8 to 54 Nm (ibF Ft: 5-40).
Linear graduation, english and french scales (ibF Ft and Nm).
Length: 325 mm.
Tolerance: 4%.



Reference	Characteristics	Weight (g)
MO-69050	8 to 54 Nm	790

Sockets 3/8" U.S Standard


Chrome steel.



Reference	Socket	Weight (g)
MO-69735	3/8"	25
MO-69736	7/16"	30
MO-69737	1/2"	35
MO-69738	9/16"	35
MO-69739	5/8"	42
MO-69740	11/16"	50
MO-69741	3/4"	55
MO-69742	13/16"	60

Sockets 3/8" Long series

65 mm length. Chrome steel.

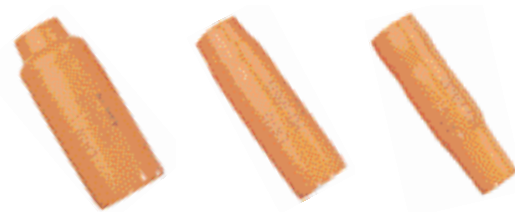

Reference	Socket (mm)	Weight (g)
MO-69610	10	75
MO-69613	13	80
MO-69614	14	100
MO-69616	16	115
MO-69617	17	125
MO-69618	18	140
MO-69619	19	160
MO-69621	21	190

6 sided male hex Key / Socket 3/8"

Steel.



Reference	Socket (mm)	Weight (g)
MO-69393	3	45
MO-69394	4	55
MO-69395	5	60
MO-69396	6	65
MO-69397	7	70
MO-69398	8	70
MO-693100	10	80

Insulated tools



Tool sets

Below 1000V

Screwdrivers

Pliers

Cutters and pliers

Wrenches, spanners and sockets

Tool sets

Tool bag

For intervention works, strong waterproof, canvas reinforced bottom, large capacity of storage, shoulder strap.



Reference	Characteristics	Weight (Kg)
M-87370	440 x 330 x 160 mm	1 100

Tool bag

Black grained leather with handle. The interior includes: a pocket, a separation which forms a tool tray and a fold-down tool tray.



Reference	Characteristics	Weight (Kg)
MO-34	410 x 280 x 150 mm	3 200

Insulated tool kits

For the most common operations, CATU proposes 4 kits of ISOMIL handtools.

Reference	Composition
KIT-03	MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm
	MO-65244 Pozidriv screwdriver N°2 6 x 100 mm
	MO-65204 Flat blade screwdriver 3.5 x 100 mm
	MO-65206 Flat blade screwdriver 5.5 x 125 mm
	MO-65209 Flat blade screwdriver 8 x 175 mm

Reference	Composition
KIT-07	MO-66002 Universal pliers overall length 180 mm
	MO-66502 Water pump pliers overall length 250 mm
	MO-67302 End stripping pliers overall length 160 mm
	MO-66402 Bent snipe nose pliers overall length 160 mm
	MO-67500 Cable cutter overhall length 170 mm

Reference	Composition
KIT-04	MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm
	MO-65244 Pozidriv screwdriver N°2 6 x 100 mm
	MO-65204 Flat blade screwdriver 3.5 x 100 mm
	MO-65206 Flat blade screwdriver 5.5 x 125 mm
	MO-65209 Flat blade screwdriver 8 x 175 mm
	MO-67302 End stripping pliers overall length 160 mm
	MO-66402 Bent snipe nose pliers overall length 160 mm
	MO-67500 Cable cutter overhall length 170 mm

Reference	Composition
KIT-05	MO-65242 Pozidriv screwdriver* N°1 4.5 x 80 mm
	MO-65244 Pozidriv screwdriver N°2 6 x 100 mm
	MO-65204 Flat blade screwdriver 3.5 x 100 mm
	MO-65206 Flat blade screwdriver 5.5 x 125 mm
	MO-65209 Flat blade screwdriver 8 x 175 mm
	MO-66002 Universal pliers overall length 180 mm
	MO-66502 Water pump pliers overall length 250 mm
	MO-67302 End stripping pliers overall length 160 mm
	MO-66402 Bent snipe nose pliers overall length 160 mm
	MO-67500 Cable cutter overhall length 170 mm



Low voltage complete set

Complete equipment for live line (L.V.) interventions.

MO-510-03-EX Tool bag not included (MO-34)

Personal equipment

MO-11001 1 safety glasses

CG-98 1 working gloves

Voltage detector

MS-911-EX 1 voltage multimeter

Insulating

CG-05-B 1 rubber gloves size B

CG-36 1 carrying bag for rubber gloves

MP-42/16 1 insulating mat

MP-26-A 10 insulating caps

MP-35/12 1 insulating blanket

MP-39 10 wood clamps for insulating blanket

MP-32/15 6 line protectors

MP-19 5 insulated adhesive tapes

Insulated tools

MO-61001 1 stripping knife

MO-67502 1 cable cutter 230 mm

MO-68008/19 1 open end spanners set with 8, 10, 11, 12, 13, 14, 17, 19 mm open end spanners

MO-69903 1 right angle hexagonal key wrench 3 mm

MO-69904 1 right angle hexagonal key wrench 4 mm

MO-69906 1 right angle hexagonal key wrench 6 mm

MO-751 1 insulating folding rule

MO-69003 1 adjustable spanner 250 mm



MO-66002 1 universal pliers 180 mm

MO-66202 1 round nose pliers 160 mm

MO-66502 1 water pump pliers 250 mm

MO-67102 1 side cutter 160 mm

MO-69308/23 1 sockets 3/8" wrench set with 10 sockets: 8, 10, 12, 13, 14, 17, 19, 21, 22, 23

MO-65205 1 flat blade screwdriver 4 x 100

MO-65207 1 flat blade screwdriver 6.5 x 150

MO-65209 1 flat blade screwdriver 8 x 175

MO-65232 1 Phillips screwdriver n° 1

MO-65234 1 Phillips screwdriver n° 2

MO-65236 1 Phillips screwdriver n° 3

Intervention kit for electricians

MO-38510 Composition:

M-87370 1 tool bag

CG-05-C 1 pair of insulated gloves

MO-11001 1 safety glasses

AL-230 1 safety padlock

MO-65204 Flat blade screwdriver - 3.5 x 100 mm

MO-65206 Flat blade screwdriver - 5.5 x 125 mm

MO-65209 Flat blade screwdriver - 8 x 175 mm

MO-65242 Pozidriv screwdriver* - N°1 4.5 x 80 mm

MO-65244 Pozidriv screwdriver - N°2 6 x 100 mm

MO-66002 Universal pliers overall length 180 mm

MO-66502 Water pump pliers overall - length 250 mm

MO-67302 End stripping pliers overall length 160 mm

MO-66402 Bent snipe nose pliers overall length 160 mm

MO-67500 Cable cutter overhall length 170 mm



From 1kV to 52kV




MEDIUM VOLTAGE

Equipment guide	58
Personal protective equipment	62
Substation equipment	73
Voltage detectors	86
Short-circuiting and earthing systems	92
General tools	99
Earth rods	104

APPLICATIONS

Examples of usual applications

Overhead line work from pole

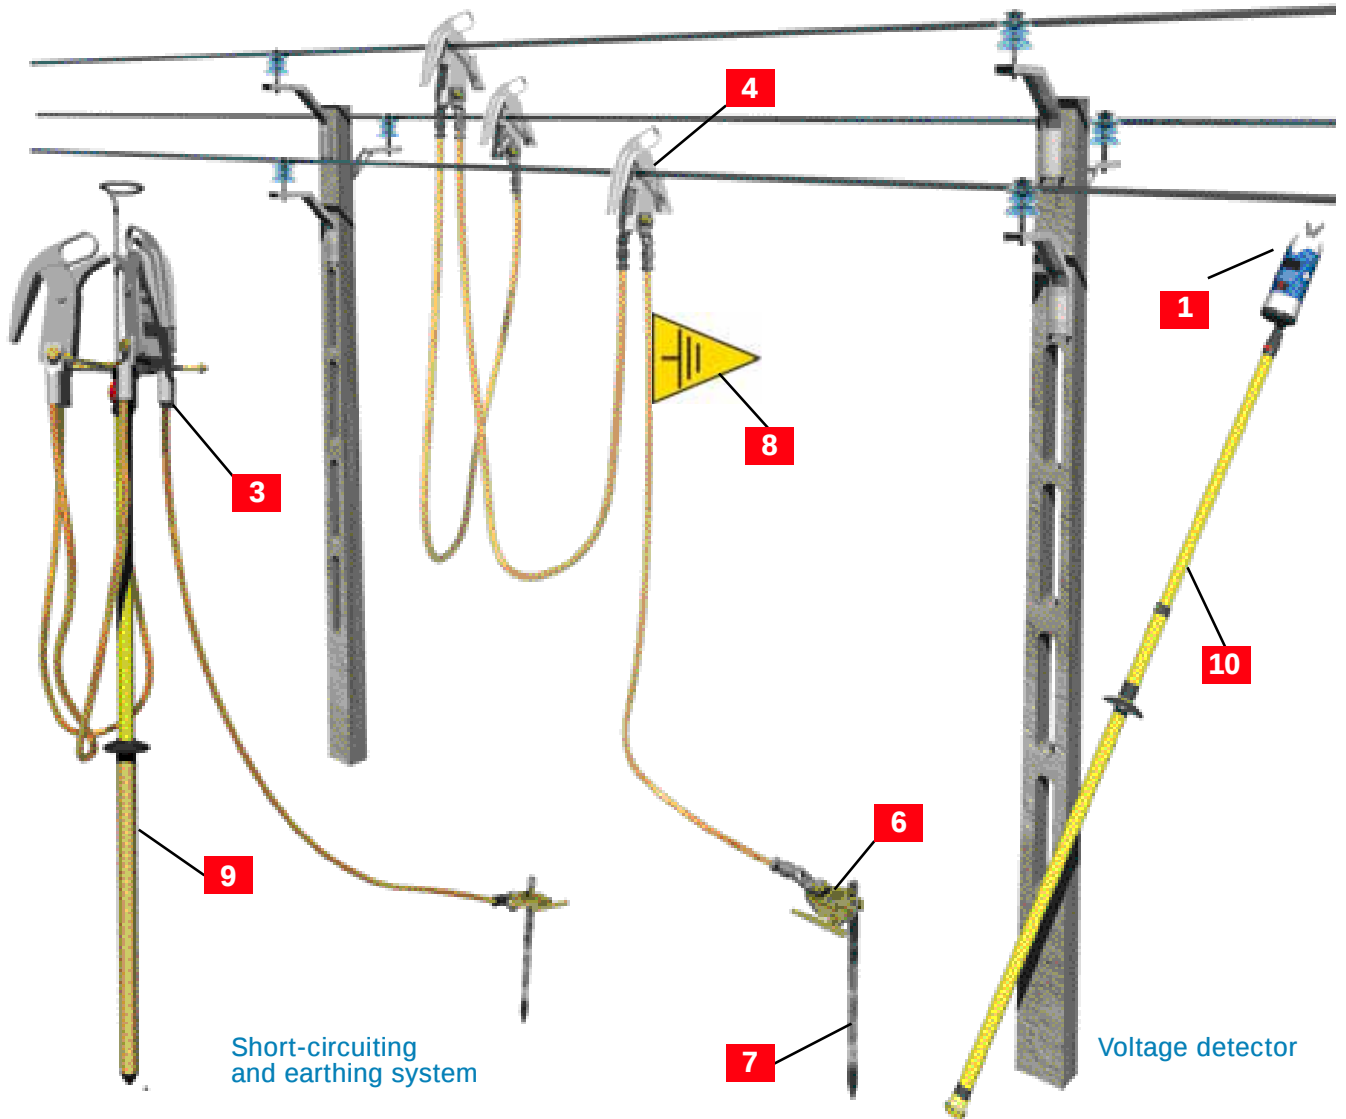

Voltage detectors and phase comparators

1	Electronic voltage detectors IEC or standard	References: CC-875 serie	Page: 86
2	Single pole phase comparator	Reference: CL-7 serie	Page: 90


Short-circuiting Systems

3	IEC short-circuiting and earthing systems: Three-phase crossarm networks (work from pole)	References: MT-6613 serie	Page: 93
4	Clamps and spare parts		Page: 93
5	Short-circuiting and earthing systems: Mid-span horizontal configurations (Work from ground)	References: MT-512/.. serie	Page: 95

APPLICATIONS

Before intervention select the right personal protective equipment

Overhead line work from ground

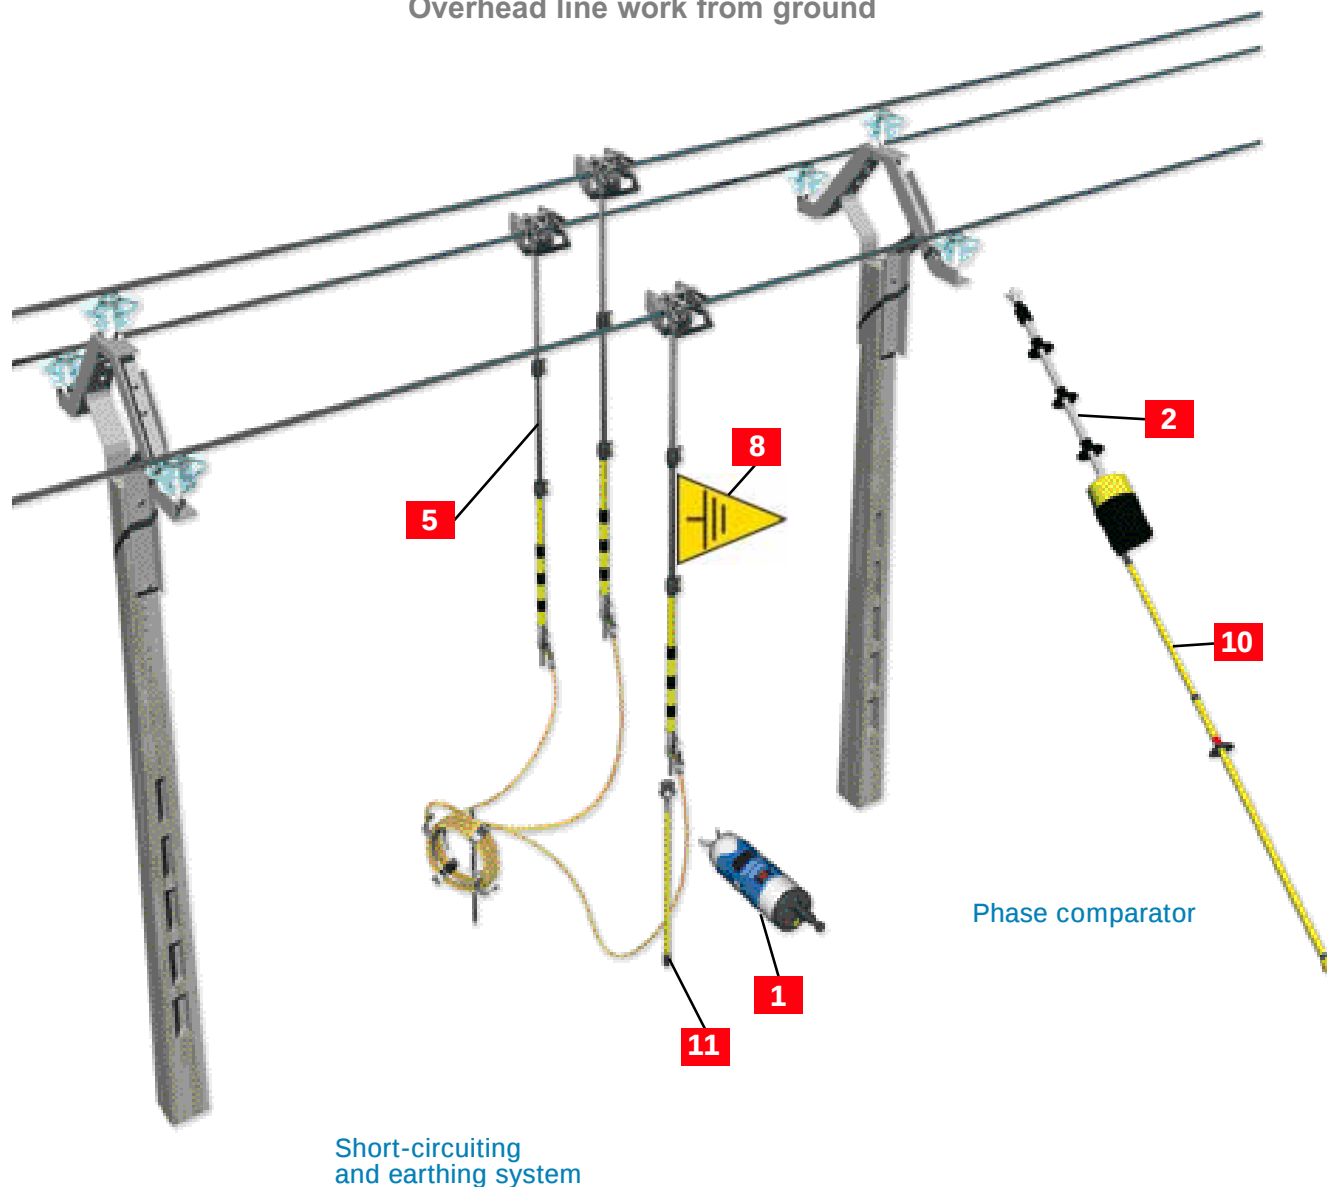

Earth Clamps, rod and flags

6	Earth Clamps	References: MT-840/1, MT-843	Page: 94
7	Earth rods	References: MT-650, MT-652/2	Page: 94
8	Earth Flags	References: AL-58, AL-60	Page: 77


Insulating sticks

9	Insulating Sticks IEC For short-circuiting systems and Voltage detectors	References: CM-4, CM-7, CM-4000	Page: 96
10	Insulating sticks IEC for voltage detectors	References: CE-4-21, CE-75	Page: 88
11	Insulating sticks for short circuiting system MT-512	Reference: MT-531	Page: 95

APPLICATIONS

Examples of usual applications

Substation with Bare conductors

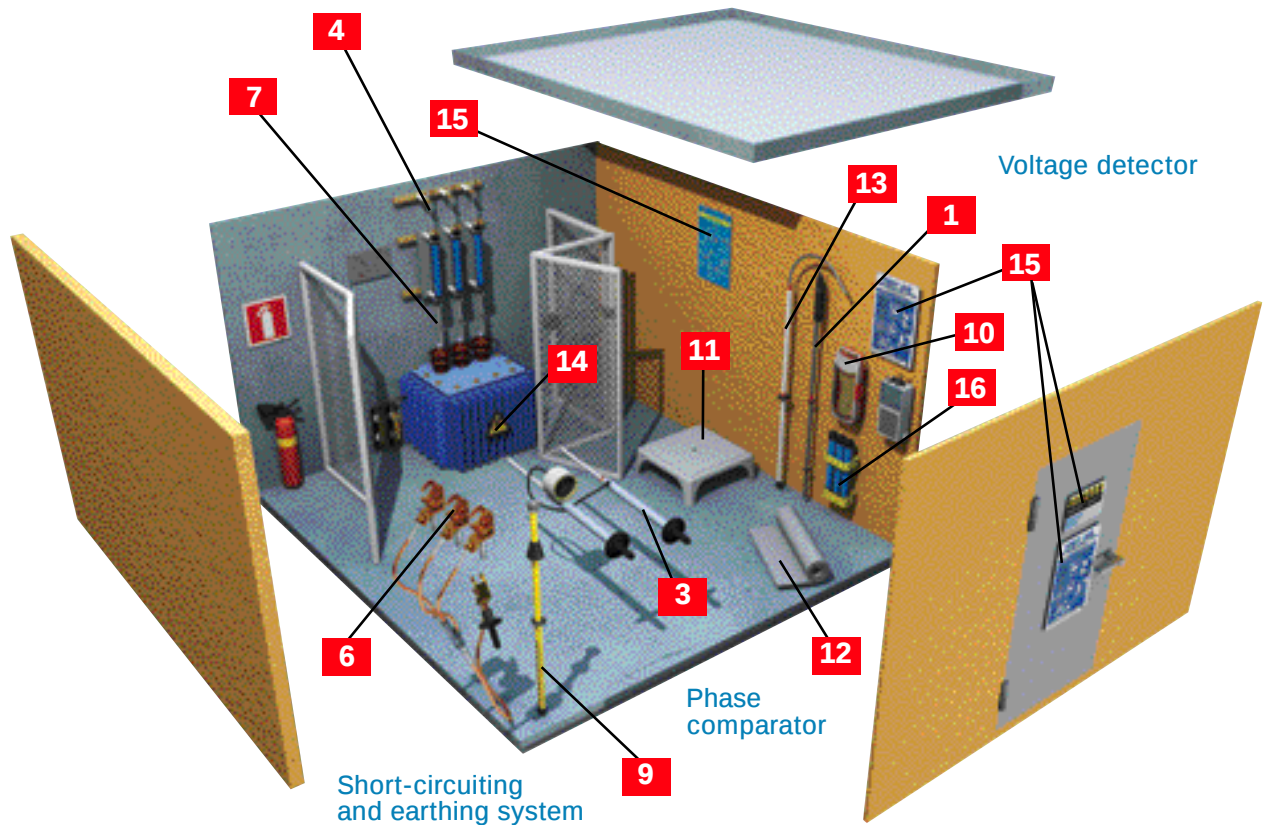

Voltage detectors and phase comparators

1	Voltage detectors for indoor use 5-40 kV	References: CL-4, CL-2 series	Page: 83
2	Voltage detector for separable connectors	Reference: CC-151-K	Page: 83
3	Phase comparators two poles or single pole	References: CL-5, CL-8, CL-7 series	Page: 89/90
4	Permanent luminous indicator	Reference: CL-40010	Page: 83
5	Integrated systems VIS VDS	References: CL-495, CL497, CL-498	Page: 89


Short-circuiting Systems

6	Short-circuiting system for MV substations: For installation on permanent fixed points For installation on bare conductors	References: MT-1910/MT-1920 References: MT-5805/MT-9801	Page: 80
7	Fixed points	References: MT-2950/MT-3950 series	Page: 81

APPLICATIONS

Before intervention select the right personal protective equipment

Substation with semi-automatic switchgear and metalclad switchgear

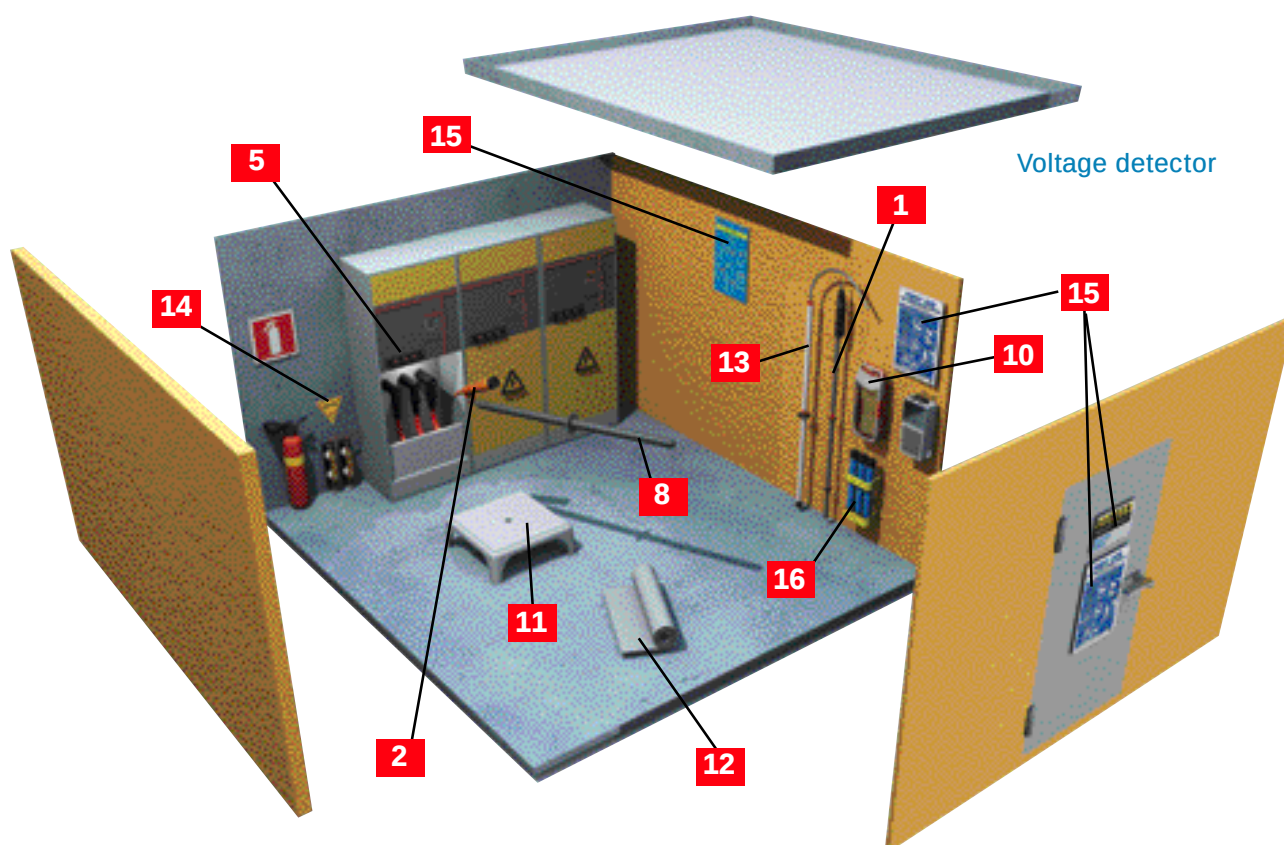

Insulating sticks

8	Voltage detectors for indoor use 5-40 kV	Reference: CC-45-K	Page: 83
9	Insulating sticks for substations use IEC-61235	References: CF-5-40/CE-4-21...	Page: 82

Protective equipment

10	Insulating rubber gloves 26500 V with storage box	References: CG-30/CG-35/2	Page: 64
11	Insulating Platform 24000 V	Reference: CT-7-25/1	Page: 67
12	Insulating mat 26.5 kV	Reference: MP-42/11	Page: 67
13	Rescue stick 45 kV	Reference: CS-45	Page: 78

Warning signs and accessories

14	Warning signs in aluminium	References: AM-49/1, AM-344-GB	Page: 76
15	Specialised signs	References: AP-510-GB/AM-20-GB	Page: 76
16	Fuse holder	Reference: CI-23	Page: 78

Personal protective equipment

Head and eyes protection

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

From 1kV to 52kV

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.



MO-11000	Clear lenses, delivered in pouch
MO-11001	Tinted lenses, delivered in pouch
MO-11003	Tinted lenses, UV/IR protection, welding filter 2. EN 169. 80°C

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.



MO-11010	Clear lenses
MO-11011	Green tinted lenses

Face shield

Polycarbonate face shield adjustable on the head by milled wheel. Protection against electric arcs of short-circuits. Anti-mist treatment. Anti-scratch treatment. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.



MO-186	Single size, adjustable
M-881635	Spare face shield for MO-186
M-87384	Bag for face shield and helmet
M-952206	Spare strap for MO-186

ABS helmet

Electrically insulating helmets for use on voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg. **EN 166/EN 170** **EN 50365** **ANSI Z89.1:2003** **Class E 20 kV** **CE**



MO-182/1-B	White
MO-182/1-R	Red
MO-182/1-J	Yellow

Face shield

Protection against electric short-circuits arcs. Face shield adjustable on MO-182 helmet. 100% UV protection. Weight: 0.170 kg. **EN 166/EN 70** **CE**

CAUTION : Do not use for welding operations.



MO-184	Single size, adjustable by rubber band
--------	--

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0.465 Kg. **EN 397** **CE**



MO-183-BL	White, single size, adjustable
MO-183-RL	Red, single size, adjustable

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg. **EN 166/EN 170/EN 397** **EN 50365** **CE**



MO-185-BL	White
MO-185-BLM	White, chinstrap with a chin
MO-185-R	Red
MO-185-J	Yellow
MO-185-B	Blue
M-881622	Spare face shield for MO-185
M-881836	Spare white padded headband
M-881889	Spare complete set (harness, chinstrap, headband)

Personal protective equipment

Head and eyes protection

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

From 1kV to 52kV

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet.
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.

CE



MS-118 Headlamp - Weight: 0.187 kg

M-95-865 Halogen bulb (sold by set of 5 units)
5.2 V 0.5 A

M-95-864 Hooks set for helmet

LED's headlamp (4 LED's)

Can be carried either on the head or any kind of helmet thanks to it supplied adhesive clip. (fig. 1 and 2).
3 lighting levels: large or narrow for a short or long distance, and both for maximal power.
Flash mode.
4 white LED's lamp with adjustable angle.
Range: 10 to 15 meters.
Powered by 3 batteries LR03 (AAA).
Autonomy: 90 hours.

CE



Fig. 1



Fig. 2

MS-122 Delivered with batteries, carrying bag, headband and adhesive clip. Weight: 82g

SUPBAND 122 Adhesive support and headband kit

SUP122 Kit of 5 adhesive supports

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's).
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting.
IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.

CE



MS-127 Delivered with batteries and a carrying bag Weight: 226 g

M-95-864 Hooks set for helmet

Intrinsically safe ATEX LED's Headlamp

Ex II 2GD EEx ia IIC T4

CE

Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Catégorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126 Delivered with batteries - Weight: 0.125Kg

M-95-864 Hooks set for helmet

Personal protective equipment

Insulating rubber gloves

From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard.

To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests.

The acceptance levels for mechanical tests are stricter.

The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set.

Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.

IEC-60903
EN 60903



Reference	Class	Voltage (V)	Designation	Overgloves size	Weight (g)
CG-15 (*)	1	7 500	latex	**	270
CG-20 (*)	2	17 000	latex	**	450
CG-30 (*)	3	26 500	latex	**	560

* References to be completed by size A, B, C, D

** See below

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11



Composite gloves

Insulating gloves with higher mechanical properties for working in full safety without leather overgloves.

IEC-60903



Reference	Class	Voltage (V)	Designation	Weight (g)
CG-16 (*)	1	7 500	orange composite gloves with mechanical properties	400
CG-22 (*)	2	17 000	orange composite gloves with mechanical properties	500



* References to be completed by size A, B, C, D. Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11.

SELECTION BOARD SIZE INSULATING GLOVES/OVER GLOVES

Gloves reference	Gloves size	Overgloves reference	Overgloves size
CG-15 (*) CG-20 (*) CG-30 (*) 	A	CG-99 (*) 	B
	B		C
	C		D
	D		E

Personal protective equipment

Insulating
rubber gloves

From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Insulating testing equipment

Equipment intended for the verification of the dielectric properties of gloves, insulating tools, elements for maneuvers, insulators, blankets, sleeves, etc. It possesses output voltages according classes 00, 0, 1, 2 and 3 of IEC standards.

The user of the CG-118 can set:

- Type of indication: acoustic signal that indicates if the insulation is fulfilling or not the standard or digital measurement of the leakage current of the element under test.
- Test period
- The language
- Select an Auto diagnose test

Technical features:

Output voltage: 2.5, 5, 10, 20, 40 kVCC.

Class tests: 00, 0, 1, 2 and 3 according IEC.

Input voltage: 110-220 VAC / 50-60 Hz. / 12 VCC and internal rechargeable battery.

Accessories: Bucket for testings

Input and earthing cables

Rubber gloves test electrodes

User's manual



Carrying case



CG-118

Insulating testing equipment

With accessories PR-40000

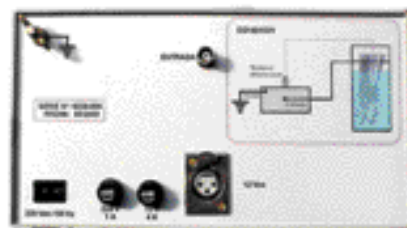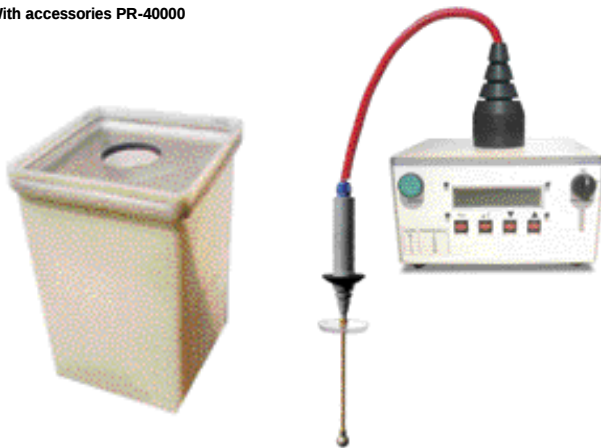

Back panel PR-40000

Pneumatic glove tester

For compulsory control of gloves before use.
Checking is done by inflating and immersing in water.



CG-117

140 x 150 x 160 mm - Weight: 0.600 kg

Personal protective equipment

Insulating rubber gloves

From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Undergloves

Cotton undergloves

To be used with insulating rubber gloves.

These washable cotton undergloves improve the use of the insulating gloves.

They bring the best held, hygiene and a greater comfort.



CG-80 (**)

** H: men / F: women

Nomex undergloves

Undergloves 100 % Nomex.

To be used under insulating gloves, for a protection against the electric hazard.

FR - Flame Resistant undergloves.

Ideal complement to Arc Flash Equipment (see page 68)



CG-37

Nomex undergloves

Mittens

Cotton mittens.

Wearing these undergloves also limits the effects of perspiration: its fingerless gloves shape allowing to keep the maximum of dexterity.



CG-81

Mittens

Overgloves

Used as outer gloves to protect insulating gloves in dry environment.

Silicon grain leather, very flexible.

Large protective cuff in chrome tanned hide.

Red adhesive strap.



CG-99 (*)

Weight: 0.170 kg * Add size: C, D, E

Working gloves

Handling leather and cotton gloves. Docker type.

Protection against mechanical risks.

EN 388



CE
3122



CG-97-C

Single size (C = 10)

Rubber gloves box

To be placed in high voltage stations, or to be carried.

Specially designed for protecting insulating gloves.

This plastic box also ensures the protection against UV radiation of insulating gloves.

The transparent cover enable to check gloves presence.

Bottle of talc included.

Can be fixed on wall.



CG-35/2

101 x 224 x 476 mm - Weight: 1.850kg

Carrying bag

Made from reinforced waterproof fabric for transport of rubber gloves in vehicles and tool boxes.

Rear loop for belt and snaps.



CG-36

90 x 175 x 585 mm - Weight: 0.120 kg

Electrician suit see page 24

Personal protective equipment



From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Insulating boots

Made from high quality dielectrical rubber, very flexible and resistant.
Anti-perforation composite sole and shell.
Anti-slip sole.
Protection against step and touch hazardous potential gradients.
EDF HTA 70B 20 000V

ISO EN 20345
CE



MV-135* Hight: 370 mm - Weight: 1.950 kg (42 size)

* Add sizes: 39-40/41-42-43-44-45-46/47-48-49/50

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface.
High quality dielectrical rubber.

IEC-61111
EN 61111
CE



Individual models.

Reference	Thickness (mm)	Class	Voltage (kV)	Dimensions (m)
MP-42/11	3	3	≤ 26.5	1 x 1
MP-42/16	3	3	≤ 26.5	0.6 x 1
MP-42/66	3	3	≤ 26.5	0.6 x 0.6

For placing in front of panels.

Reference	Thickness (mm)	Class	Voltage (kV)	Dimensions (m)
MP-60/03-5	3	3	≤ 26.5	0.6 x 5
MP-60/03-10	3	3	≤ 26.5	0.6 x 10
MP-100/03-5	3	3	≤ 26.5	1 x 5
MP-100/03-10	3	3	≤ 26.5	1 x 10
MP-60/05-5	5	4	≤ 36	0.6 x 5
MP-60/05-10	5	4	≤ 36	0.6 x 10
MP-100/05-5	5	4	≤ 36	1 x 5
MP-100/05-10	5	4	≤ 36	1 x 10

Bags for insulating mats

Specially designed for carrying and protecting insulating mats. Equipped with a shoulder strap and a plastic window for instructions and storage identification.



MP-01 For MP-42/16 and MP-42/66 length: 70 cm

MP-02 For MP-42/11 length: 110 cm

Multi-pockets electrician bag

Specially designed for carrying and protecting insulating mats, face shield and controllers. Equipped with several pockets.



M-87386 65 x 15 x 25 cm

Insulating platforms (indoor models)

Moulded insulating material, one-piece. Top 50 x 50 cm.



Reference	Rated insulation (V)	Height (mm)	Weight (kg)
CT-7-25/1	24 000	220	3.7
CT-7-40/1	40 000	260	3.8

Insulating platforms (outdoor models)

Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm.
Feet with rubber tips.



Reference	Rated insulation (V)	Number of skirts per foot	Height (mm)	Weight (kg)
CT-9-25	24 000	2	350	6.00
CT-9-45	45 000	3	435	6.50

Personal protective equipment



From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

In many countries regulations have been established to protect workers from electrical shock and flash hazards in specific areas within which arc flash protection is required. These equipment must be used with insulating gloves and leather overgloves. Equipment up to 100 cal/cm² on request.

In compliance with NFPA 70E and ASTM Standards. FR - Flame Retardant garments.

Arc flash face shield kit (10 cal/cm²)

Composition of the kit:

- 1 Face shield with chin cup 10 cal/cm², absorbs > 99.9% of harmful UV radiation, 70% light transmission, tested to ASTM F2178 specifications
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1 20kV.
- 1 carrying bag for face shield and helmet



KIT-ARC-01 Weight: 1.5 kg

Arc flash protective kits (25, 40, 55, 65 or 100 cal/cm²)

Composition of the kit:

- 1 arc flash protective hood with an integrated face shield 25, 40, 55, 65 or 100 cal/cm², ASTM F2178 and NFPA 70E Standards
- 1 arc flash protective coat 25, 40, 55, 65 or 100 cal/cm², ASTM F1506 and NFPA 70E Standards
- 1 arc flash protective bib overall 25, 40, 55, 65 or 100 cal/cm², ASTM F1506 and NFPA 70E Standards
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1 20kV.
- 1 safety glasses EN 166/EN 170
- 1 carrying bag for face shield and helmet
- 1 all kit carrying bag



KIT-ARC-25

Arc flash jacket and protective coverall kits (8 or 10 cal/cm²)

Composition of the kit:

- 1 Face shield with chin cup 10 cal/cm², absorbs > 99.9% of harmful UV radiation, tested to ASTM F2178 specifications
- 1 ABS helmet electrically insulated EN397, EN 50365, ANSI Z89.1, 20kV.
- 1 safety glasses EN 166/EN 170
- 1 arc flash protective hood (10 cal/cm², only with coverall)
- 1 protective coverall 8 or 11 cal/cm², ASTM F1506 and NFPA 70E Standards or
- 1 arc flash protective jacket 11 cal/cm², ASTM F1506 and NFPA 70E Standards
- 1 carrying bag for face shield and helmet
- 1 all kit carrying bag



KIT-ARC-08-C*	8 cal/cm ² with coverall	Weight: 4.03 kg
KIT-ARC-10-J*	10 cal/cm ² with jacket	Weight: 4.03 kg
KIT-ARC-10-C*	10 cal/cm ² with coverall	Weight: 4.03 kg

* Add size M, L or XL (S to 3XL on request).



KIT-ARC-65/100



KIT-ARC-40/55

KIT-ARC-25-B*	25 cal/cm ² Indura Ultra Soft	Weight: 6.7 kg
KIT-ARC-40-B*	40 cal/cm ² Indura Ultra Soft	Weight: 6.7 kg
KIT-ARC-55-B*	55 cal/cm ² Indura Ultra Soft	Weight: 6.7 kg
KIT-ARC-65-B*	65 cal/cm ² Kevlar/Nomex	Weight: 6.7 kg
KIT-ARC-100-B*	100 cal/cm ² Kevlar/Nomex	Weight: 6.7 kg

* Add size M, L or XL (S to 3XL on request).

Personal protective equipment

Equipment for
working on pole

From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Pro electric full body fall arrest harness

2 fall arrest attachment point: dorsal and sternal. Automatic buckles of the belt and leg loops. Elastic shoulder straps. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps.

Tools holders.

3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.7 kg.



EN 358
EN 361
CE

MO-563(*) S = small M = medium XL = large

* add size: S/M/XL

Pro electric full body fall arrest harness

2 fall arrest attachment point: one dorsal point, one sternal point. Easy and fast to wear with a ventral snap-hook. A ventral attachment point for a descender and / or lanyard. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable.

Polyamide straps. Tools holders

3 sizes : S, M, XL. Delivered in a protective bag with a users manual. Weight: 3 kg.



EN 358
EN 361
EN 813
CE

MO-565(*) S = small M = medium XL = large

* add size: S/M/XL

Full body fall arrest harness

2 fall arrest attachment point : dorsal and sternal. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Unique size. Delivered in a protective bag.



EN 358
EN 361
CE

MO-71 Weight: 1.9 kg

Equipped rope straps with lever stretcher

Equipped with adjuster. Hooks to belt with rapid link.




EN 358
CE

MO-52-L Length: 4 m - Weight: 1 kg

Anti-fall grip

The safety block runs freely on its rope but can be automatically locked in case of a sudden downward drop. Must be used only with special 15 mm Ø rope delivered with the device.

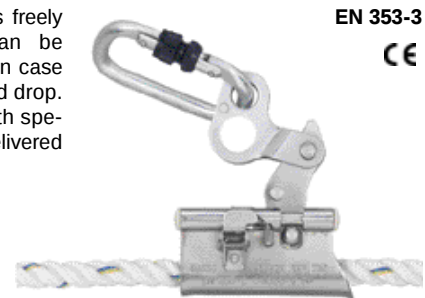

EN 353-3
CE

MO-68/10 With 10 m of rope - Weight: 2.300 kg

MO-68/15 With 15 m of rope - Weight: 3.250 kg

Double safety descent device

Articulated stainless steel cam. Aluminium housing. High-resistance handle. Operates with 9-12 mm diameter lanyard. Ideal for evacuation. Lets you regulate descent.



EN 361
CE

MD-02 Weight: 0.32 Kg

Tether rope with energy absorber

Tether rope in polyamide Ø14 mm.




EN 355
CE

MO-52020 Length: 1.50 m

MO-52021 Length: 2.00 m

Double tether rope with energy absorber

Double tether rope with energy absorber Equipped with 2 steel snap hooks with automatic locking and 1 steel snap hook with screwing locking

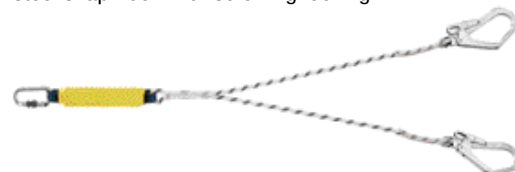

EN 355
CE

MO-54010 Length: 1.20 m - Weight: 1.4 kg

MEDIUM VOLTAGE

Personal protective equipment



From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Snap hooks (stainless steel)



MO-54



MO-55/1

EN 362
CE

MO-54 Locks with threaded ring - Opening: 15 mm
100 x 58 mm - 0.154 kg

MO-55/1 Locking by screwing ring on a spring loaded mobile catch; an additional catch is provided to prevent the rope from slipping in the carabiner - 155 x 75 mm - 0.140 kg

Snap hooks (aluminium alloy) zicral



MO-54000



MO-54004

EN 362
CE

MO-54000 Oval snap hook - Opening: 15 mm
Individually tested - Weight: 0.071 kg
110 x 58 mm

MO-54004 D-shaped snap hook with automatic locking
Opening: 23 mm - Individually tested
Weight: 0.087 kg - 120 x 72 mm

Lanyard

Synthetic fibre ropes - 10 mm.
Loops spliced at both ends.
Delivered without snap hook.



EN 354
CE

MO-53 Length: 1.50 m - Weight: 0.125 kg

Fall arrester - retractable type

Designed for lineman safety. Quick acceleration causes instant locking. Corrosion protected steel shell. Integrated braking mechanism and dissipating element. Self locking mechanism and automatic tensioning and return facility. Galvanized cable Ø 4 mm. Strength: 1 200 daN. Delivered with a screw crab. Max. length: 10 m.



EN 360
CE

MO-591002 Weight: 7.00 kg

Snap hook with double safety latch

Opening: 50 mm
Body in steel
Fingers in stainless steel
Resistance: 20 kN.



EN 362
CE

MO-54002 Weight: 0.390 Kg

Tether rope equipped with a tension device

The tether rope is intended to ensure that operators are held in position when working at a height. This tether rope must be associated with a harness belt. Ends sewn to form an attachment and protected with a plastic girdle. Polyamide Ø 12 mm. Light alloy.



EN 358
CE

MO-56009 Weight: 0.750 kg - Length: 2 m

MO-56010 Weight: 1.000 kg - Length: 5 m

Safety rope with wear tell tales

Rope: 14 PEPT multi-filament (15 mm diam.)
Two-colour safety rope, 100% polyester made of 3 white strands with black central thread (wear telltale).
Buckle: Polyamide central lug attaches to snap-hook of belt.



EN 354
CE

MO-052 Safety rope only - Length: 4 m - 0.76 kg

Mobile safety line

5 to 20 metres mobile safety line with adjustable harness. Easy and quick to set up, this line can be used by 2 people. It is equipped with a tension device. It has 2 harness rings with screw gate karabiners, reference 40. This safety line is designed for short operations. It takes a few minutes to set it up on 2 attachment points and can withstand a force of 2,000 kg. The line is tightened by hand to be taut as possible. The users can then hook themselves to the safety line using a fall arrest device or a shock absorbing lanyard. When using a shock absorbing lanyard, allow for at least 7 metres clearance.



EN795B
CE

MO-53002 Weight: 2.82 kg

Personal protective equipment



From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Anti-fall device with automatic release strap

Winder with self-locking strap.
Length: 2 m.
Equipped with shock absorber.
Allows 2 m of movement autonomy around anchoring point.

EN 360



MO-591000 Weight: 1.160 kg

Constraint tie

Tie in polyamide.

EN 795

CE



MO-52031 Length: 0.8 m - Weight: 0.100 kg

MO-52033 Length: 1.20 m - Weight: 0.135 kg

MO-52034 Length: 1.50 m - Weight: 0.150 kg

Snap hook with stick adapter

To fix a life line from the ground.
Snap hook to be operated with a stick and unlocking using a cord.

Reference	Characteristics
MO-54005-C	Opening: 50 mm End-piece C
MO-54005-K	Opening: 50 mm End-piece K
CE-5-90-C	Length: 9 m max. Weight: 4 kg End-piece C
CE-5-90-K	Length: 9 m max. Weight: 4 kg End-piece K

Other length, see page 88.



EN 362

CE

Working on pole kits



Reference	Use
KIT-HAUT-01-(*)	To go up a pole with insulating ladders
KIT-HAUT-02-(*)	To go up a pole with spliced ladders
KIT-HAUT-03-(*)	To go up a catenary
KIT-HAUT-04-(*)	To go up on a pylon
KIT-HAUT-05-(*)	To go up on a roof
KIT-HAUT-06-(*)	To go up using a nacelle

Composition	KIT-HAUT-					
	01*	02*	03*	04*	05*	06*
Harness MO-563	n	n	n			
Harness MO-565				n		
Harness MO-71					n	n
Tether rope MO-52020	n					n
Double tether rope MO-54010		n		n	n	
Constraint tie MO-52034	n	n				
Constraint tie MO-52031				n ⁽²⁾		
Tether rope with tension device MO-56009	n	n	n	n	n	
Anti-fall grip MO-68/15	n	n	n	n		
Snap hook MO-54	n	n				
Carrying bag M-87-295	n	n	n	n	n	n

(*) add size : M or XL - order example : KIT-HAUT-02-XL.

Personal protective equipment

Equipment for
working on pole

From 1kV to 52kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and platforms

Arc flash equipment

Equipment for working on pole

Insulating ladders

A complete range with top quality features: Insulation between two steps: 30000 V (test performed after immersion in water for 24 hours). High mechanical resistance to bending and twisting. Good resistance/weight ratio. High fire resistance. High resistance against bad weather and corrosive elements. Lateral risers in polyester/glass fiber rectangular section 70 x 25 mm. Aluminium alloy rungs with square 29 x 29 mm section and anti-slip coating.

INSULATING 2 SECTION EXTENSION LADDERS,
HAND OPERATED

Reference	Folded length	Extended length	Number of rungs	Weight (kg)
MP-514/2	2.41 (m)	4.09 (m)	2 x 8	13.9
MP-515/2-R	2.97 (m)	5.21 (m)	2 x 10	17

INSULATING 2 SECTION EXTENSION LADDERS,
ROPE AND PULLEY OPERATED

MP-506/2	3.53 (m)	6.05 (m)	2 x 12	22.9
MP-508/2	4.66 (m)	8.30 (m)	2 x 16	35.4
MP-509/2	5.22 (m)	9.14 (m)	2 x 18	39.3
MP-510/2	5.78 (m)	10.26 (m)	2 x 20	43

Forged steel climbers for round wooden poles

Hard forged steel - Leather belts with cast buckles.
Delivered by pair.



MO-24	Ø 20 cm - 2.6 kg - Pair of climbers
MO-25	Ø 25 cm - 2.8 kg - Pair of climbers
MO-26	Ø 30 cm - 3.0 kg - Pair of climbers
MO-35	Ø 35 cm - 3.2 kg - Pair of climbers

Mechanical climbers for round and hexagonal concrete poles

Manual locking
Adaptable to the pole diameter
For poles Ø 140 to 300 mm.



MO-16-A	Pair of climbers - Weight: 6.5 Kg
---------	-----------------------------------



EN 131

CE



Mechanical climbers for rectangular shaped concrete poles

Automatic locking of jaws by elastic cord.
Sole in aluminium alloy, high resistance, with leather belts and steel buckle.
Wear plate placed on sole arm.
Mobile drum on axis can be removed; processed steel rollers.
High resistance aluminium alloy rack, used for clamping onto poles 14 to 42 cm wide.



Spare parts:
MO-17-01: pair of elastic cords
MO-17-02: pair of wear plates
MO-17-03: blade roller
MO-17-04: pair of runners

MO-17-A	Pair of climbers - Weight: 6.5 Kg
---------	-----------------------------------

Climbers for H profile metallic poles

Hard forged steel.
Delivered by pair.



MO-23	Pair of climbers - Weight: 5.10 kg
-------	------------------------------------

Substation equipment

Padlocks, warning signs and delineators

From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

A wide range of brass padlocks, in a plastic body.

Brass ring bow 50 or 70 mm. Diameter of the ring bow 4 or 6 mm. Different n° of keys. Colours : red, white, yellow, blue or green.

Padlocks with warning signs

Reference	Ring bow (mm)	Ø (mm)	Weight (kg)
AL-230-(*)-EX	50	6	0.170
AL-230-S-(*)-EX	70	6	0.190
AL-230-Z-EX	50	6	0.170
AL-230-S-Z-EX	70	6	0.190
AL-240-(*)-EX	50	4	0.170
AL-240-S-(*)-EX	70	4	0.190
AL-240-Z-EX	50	4	0.170
AL-240-S-Z-EX	70	4	0.190



* Add n° of key: 111 or 222

"00" n° standard key: n° of key upon request. Z: random n° of key

Colour padlocks range

Reference	Ring bow (mm)	colour	Ø (mm)	Weight (kg)
AL-240-B-Z-EX	50	White	4	0.170
AL-240-B-00-EX	50	White	4	0.170
AL-240-S-B-00-EX	70	White	4	0.190
AL-240-J-Z-EX	50	Yellow	4	0.170
AL-240-J-00-EX	50	Yellow	4	0.170
AL-240-S-J-00-EX	70	Yellow	4	0.190
AL-240-BL-Z-EX	50	Blue	4	0.170
AL-240-BL-00-EX	50	Blue	4	0.170
AL-240-S-BL-00-EX	70	Blue	4	0.190
AL-240-V-Z-EX	50	Green	4	0.170
AL-240-V-00-EX	50	Green	4	0.170
AL-240-S-V-00-EX	70	Green	4	0.190



Substation equipment

Padlocks, warning signs and delineators

From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Multiple locking apparatus

Holds up to four padlocks and a sign.

AL-200



AL-202



AL-200	100 x 60 x 10 mm - Weight: 0.150 kg
AL-202	165 x 50 x 12 mm - Weight: 0.200 kg

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



AL-207/10	For 10 padlocks - Weight: 0.06 kg
AL-207/30	For 30 padlocks - Weight: 0.130 kg

Safety locking badge

Fit with multiple locking apparatus AL-202
White letters on red aluminium
Fixing with 1 hole Ø 10 mm.



AM-467-GB	Ø 80 mm
-----------	---------


Handle with 6 padlocks

Handle of moulded plastic for holding up to six padlocks.
Compartment with transparent cover for key storage.



Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.

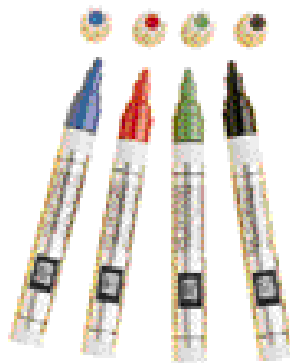

AS-404	4 markers in assorted colours (red, black, blue and green)
--------	--

Reference	Weight (kg)	Handle with 6 padlocks
AL-236-111-EX	1.150	AL-230-111-EX
AL-236-S-111-EX	1.210	AL-230-S-111-EX
AL-236-222-EX	1.150	AL-230-222-EX
AL-236-S-222-EX	1.210	AL-230-S-222-EX

Substation equipment

Padlocks, warning signs and delineators

From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Self adhesive warning signs

Complete range of self adhesive, warning signs conditioned in box of 20, 30 or 50 units.



Reference	Dimensions	Characteristics	Quantity/box
AT-41/025	25 mm side	self adhesive PVC	50
AT-41/05	50 mm side	self adhesive PVC	30
AT-41/1	100 mm side	self adhesive PVC	20
AT-49/025	25 mm side	self adhesive PVC	50
AT-49/05	50 mm side	self adhesive PVC	30
AT-49/1	100 mm side	self adhesive PVC	20
AT-50/025	25 mm side	self adhesive PVC	50
AT-50/053	50 mm side	self adhesive PVC	30
AT-50/1	100 mm side	self adhesive PVC	20
AT-51/025	25 mm side	self adhesive PVC	50
AT-51/05	50 mm side	self adhesive PVC	30
AT-51/1	100 mm side	self adhesive PVC	20
AT-52/05	50 mm side	self adhesive PVC	30
AT-52/1	100 mm side	self adhesive PVC	20
AT-53/05	50 mm side	self adhesive PVC	30
AT-53/1	100 mm side	self adhesive PVC	20
AT-54/05	Ø 50 mm	self adhesive PVC	30
AT-54/1	Ø 100 mm	self adhesive PVC	20
AT-55/05	Ø 50 mm	self adhesive PVC	30
AT-55/1	Ø 100 mm	self adhesive PVC	20
AT-56/05	Ø 50 mm	self adhesive PVC	30
AT-56/1	Ø 100 mm	self adhesive PVC	20
AT-57/05	Ø 50 mm	self adhesive PVC	30
AT-57/1	Ø 100 mm	self adhesive PVC	20
AT-58/05	Ø 50 mm	self adhesive PVC	30
AT-58/1	Ø 100 mm	self adhesive PVC	20
AT-59/05	Ø 50 mm	self adhesive PVC	30
AT-59/1	Ø 100 mm	self adhesive PVC	20
AT-60/05	Ø 50 mm	self adhesive PVC	30
AT-60/1	Ø 100 mm	self adhesive PVC	20
AT-61/05	Ø 50 mm	self adhesive PVC	30
AT-61/1	Ø 100 mm	self adhesive PVC	20
AT-62/05	Ø 50 mm	self adhesive PVC	30
AT-62/1	Ø 100 mm	self adhesive PVC	20
AT-63/05	Ø 50 mm	self adhesive PVC	30
AT-63/1	Ø 100 mm	self adhesive PVC	20
AT-66/1	100 mm side	self adhesive PVC	10



"Customize your labels! On request"

Available on request: Self adhesive rigid plastic warning signs. High Quality, strong sticking on every surfaces: concrete, painted wall, metal, wood, plastic, glass.

Substation equipment

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

From 1kV to 52kV

Substation signs

WARNING SIGNS

Reference	Type	Dimensions	Characteristics
AM-41/1*	aluminium	100 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-41/2	aluminium	200 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-49/1*	aluminium	100 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-49/2	aluminium	200 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-344-GB	aluminium	100 mm side	black letters on yellow fixing: 3 holes Ø 4.5 mm
AM-345-GB	aluminium	100 mm side	black letters fixing: 3 holes Ø 4.5 mm
AM-344/05	aluminium	50 mm side	
AM-344	aluminium	100 mm side	

*Pack of 10 units.

SPECIALIZED SIGNS

Reference	Type	Dimensions	Characteristics
AM-20-GB	aluminium	350 x 250 mm	blue letters on plain aluminium
AM-20-RM	aluminium	350 x 500 mm	blue letters on plain aluminium
AM-61-GB	aluminium	150 x 200 mm	
AM-61-RM	aluminium	150 x 200 mm	
AM-215-RM	aluminium	350 x 250 mm	black on yellow SF6 warning
AM-282/2-RM	aluminium	200 x 60 mm	
AM-7002	aluminium	300 x 200 mm	black on yellow
AM-33/3	aluminium	Ø 300 mm	red-black on alu
AM-34/2	aluminium	Ø 200 mm	red-black on alu
AM-32/3	aluminium	Ø 300 mm	
AP-510-GB	plastic	420 x 297 mm	golden rules
AP-951/2	plastic	200 x 200 mm	red on white



AM-41/1



AM-49/1



AM-344/05 - AM-344



AM-344-GB



AM-345-GB



AM-20-GB



AM-20-RM



AP-510-GB



AM-215-RM



AM-282/2-RM



AM-7002



AM-61-GB



AM-61-RM



AP-951/2



AM-33/3



AM-34/2



AM-32/3

For other models, please consult us.

Substation equipment

Padlocks, warning signs and delineators

From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps


Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Warning sign

Attachment: one hole Ø 10 mm.
Marking for indelible writing: see page 74.



Reference	Type	Ø (mm)
AP-499/1	plastic	100

Safety boundary post

For temporary installation.
Used with tough link chain delineators (AL-32/05).
Removal Foot.
Ø 50 mm.
Height: 0.9 m.



AL-316	Red and white - Weight: 4.2 kg
AL-318	Black and yellow - Weight: 4.2 kg

Warning flags

Brightly colored ribbon.



Reference	Dimensions (mm)	Fixing
AL-53	650 x 350	on handle


Chain delineators

Polyamide chains.



AL-31/25	Red and white - Length: 25 m
AL-31/05	Red and white - Length: 5 m
AL-32/05	Black and yellow - Length: 5 m
AL-31	Opening ring for AL-31/25

Grounding flags

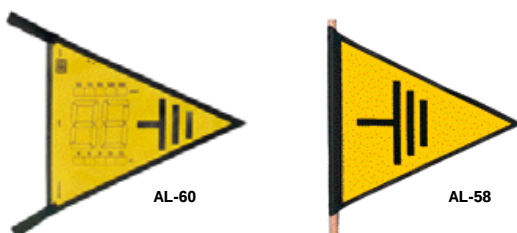

AL-58	Fixing on handle; for work site
AL-60	Fixing on earthing cable; for immediate identification in open-type switchgears possible inscription: 0 to 99 (by using ALU-SCRIPT markers)

Delineators

Brightly colored ribbon.
Snap hook on one ribbon end and another on spool.
A ring on spool brakes ribbon at desired length.
Wide: 50 mm - length: 20 m.



AL-62-A	Red ribbon
AL-63-A	Yellow ribbon

Substation equipment

Safety equipment & lamps

From 1kV to 52kV

Padlocks, warning signs and delineators


Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Intervention kits

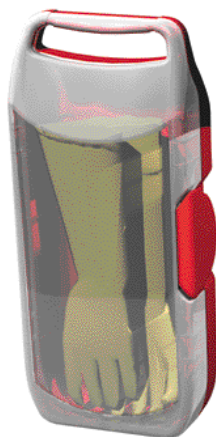


CG-35/2



CG-30 (IEC 60903)




CT-7-25/1

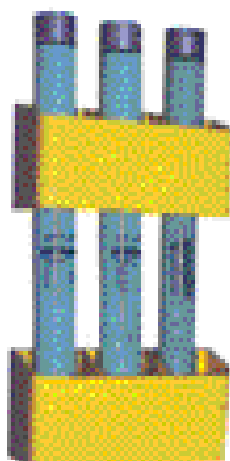

CI-23



MP-42/16

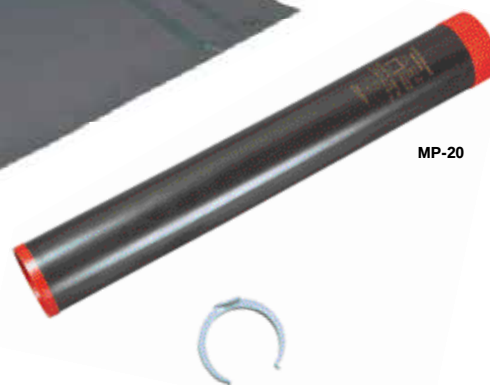

MP-20

CS-45

Reference	Composition	Characteristics	Dimensions
CG-30-C	Insulating rubber gloves	26 500 V max	size 10
CG-35/2	Rubber gloves box		101 x 224 x 476 mm
CI-23	Fuse holder		90 x 240 x 260 mm
CS-45	Rescue stick	45 kV	1.65 m
CI-06-D	Wall mounted supports	Delivered with CS-45	
CT-7-25/1*	Insulating platform	24 000 V max	500 x 500 x 220 mm
MP-42/16**	Insulating MAT	≤ 26.5 kV	0.6 x 1 mm

KIT-01*

Intervention kit with insulating platform

KIT-10**

Intervention kit with insulating mat delivered with a protective P.V.C. container

Substation equipment

Safety equipment & lamps

From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Safety lamps

For MV indoor substations.

CD-122 Halogen lamp - Automatic switch on in case of power break
Adjustable flood beam - power beam:
5.5 W Operates: 3 hours - Weight: 1.2 kg

CD-124 Delivered with a wall mounted support
Bulb: 6 W/12 W
Operates: 1 hour (12 W), 2 hours (6 W)
Rechargeable on 230 V 50/60 Hz
3 positions switch: Off, 6 W, 12 W
100 x 190 x 220 mm - Weight: 1.9 kg



CD-124



CD-122

Intrinsically safe Atex torch light

Ex II 2GD EEx ibe IIC T4 or T6.

Zone 1 and 2 - 21 and 22.

- Simple optical system.
- Power supply by 1.5 V LR20 batteries (x3).
- Bulb P13, 559 - 3.7 V - 0.3 A.
- IP 66.

CD-103 Torchlight Ø 50 x 244 mm - Weight: 0.250 kg

MS-115-1 Bulb for CD-103 (ordering by 5)



Double optical systems.

Ex II 2GD EEx ibe IIC T6 or T4 or T3.

Zone 1 and 2 - 21 and 22.

Protection mode (suitable for all areas and gases).

Appropriate certificates for Merchant Marine and VERITAS.

Power supply by 1.5 V LR20 batteries (x2).

Fixed light or intermittent optical signals.

IP 66/68.

CD-104 Dimensions: 230 x 90 x 90 mm - Weight: 400 g



Intrinsically safe ATEX LED's Headlamp

Ex II 2GD EEx ia IIC T4.

Can be carried either on the head or any kind of helmet.

- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Catégorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).

MS-126 Delivered with batteries - Weight: 0.125Kg

M-95-864 Hooks set for helmet



CE

MEDIUM VOLTAGE

Substation equipment

Short-circuiting
& earthing systems

From 1kV to 52kV

Padlocks, warning
signs and delineators

Safety equipment
& lamps

Short-circuiting
& earthing systems

Voltage detectors
and V.I.S / V.D.S

Saving kits

IEC short-circuiting and earthing systems for MV substations


These equipment are intended for connection: to permanent fixed points or to bare conductors.

IEC-61230 

They consist of 3 contact clamps.

1 short-circuit earthing connection set consisting of 3 extra-flexible copper cables with silicone sheath, L = 1.5 m each. 1 trifurcation connector earthed by an extra-flexible copper cable with silicone sheath, L = 2.5 m. 1 earthing clamp. 1 plastic case (M-78665).


Installation on permanent fixed points

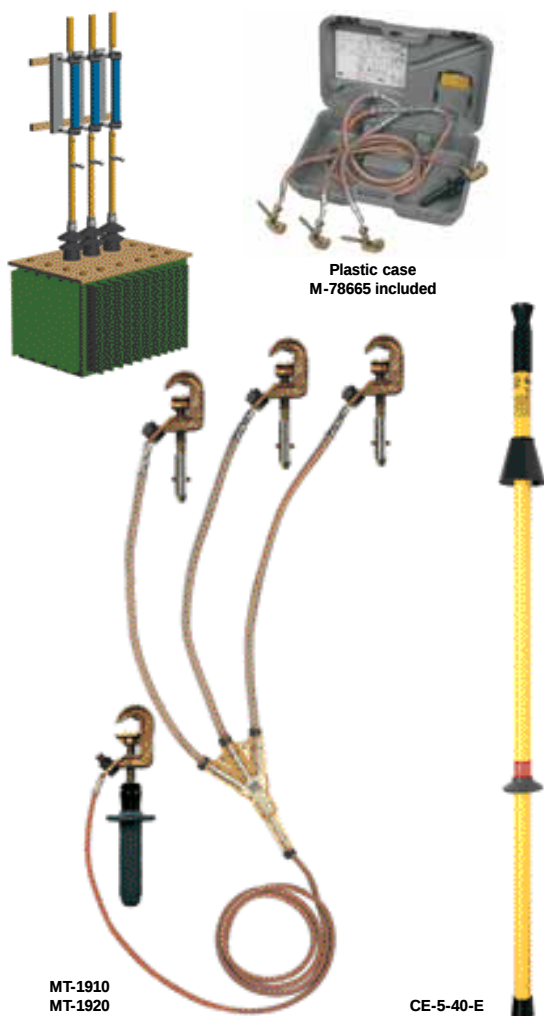

MT-1910
MT-1920

CE-5-40-E

Installation on bare conductors

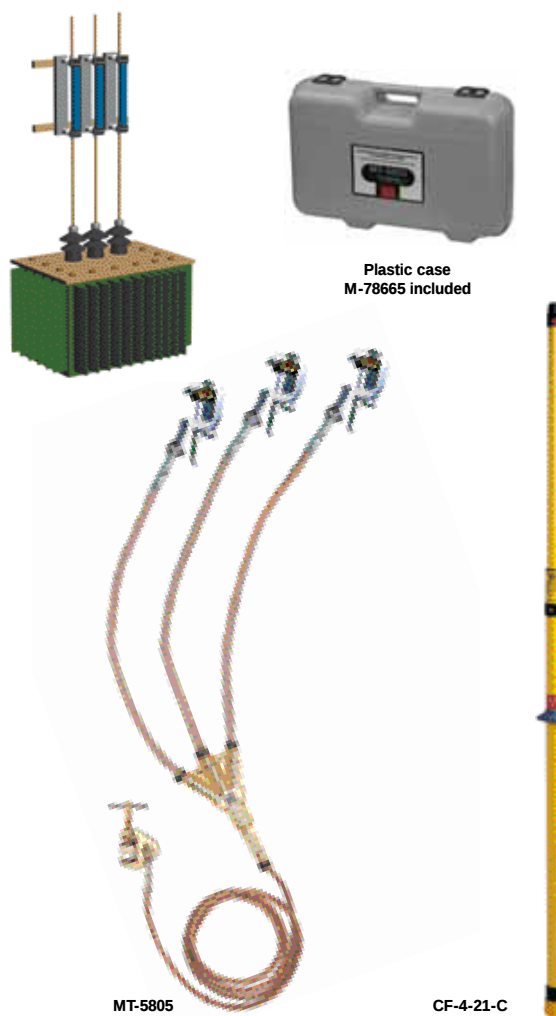

MT-5805

CE-4-21-C

Reference	MT-1910	MT-1920
Icc (kA/1s)	20	30
Installation on fixed points	Ø 20 mm MT-2951 range	Ø 25 mm MT-3951 range
Composition	3 clamps MT-1911-E 1 MT-1911	3 clamps MT-1921-E 1 MT-1921
Connection set	3 cables 95 mm ² 1 earth cable 35 mm ²	3 cables 150 mm ² 1 earth cable 50 mm ²
Sticks**	CF-5-40-E	CF-5-40-E

** Stick to be ordered separately

Reference	MT-5805	MT-9801
Icc (kA/1s)	20	10
Conductors (mm)	• Ø 5-35 — 16-40 — 5-35	• Ø 5-16 — 0-16 — 40-16 • Ø 5-28
Composition	3 clamps MT-815-C 1 earth clamp MT-840/1	3 clamps MT-817-C 3 clamps MT-814/2 1 earth clamp MT-840/1
Connection set	3 cables 95 mm ² 1 earth cable 35 mm ²	3 cables 50 mm ² 1 earth cable 25 mm ²
Sticks**	CE-4-21-C	CE-4-21-C

*For earthing systems to your own specifications,
please see page 129.*

Substation equipment

Short-circuiting
& earthing systems

From 1kV to 52kV

Padlocks, warning
signs and delineators

Safety equipment
& lamps

Short-circuiting
& earthing systems

Voltage detectors
and V.I.S / V.D.S

Saving kits

Clamps for MV installations and substations

Attachment (C-Type)

Hexagonal end-fitting. A circumferential braking system prevents the clamp from turning under the weight of the cable.

Separates by simple pulling.

Earth cable connection

With a crimped lug (12 mm Ø hole).

Material

Aluminium alloy except MT-814, MT-1911 and MT-1921:
copper-aluminium bronze.

IEC-61230 

Reference	Weight (kg)	Dimensions (mm)	Conductors (mm)	Test current (kA/1s)
MT-812-C	0.320	35 x 79 x 143	● Ø 5-16 ■ 0-16	21
MT-813-C	0.330	35 x 79 x 169	■ 40 x 16	21
MT-814/2	0.660	85 x 56 x 192	● Ø 5-28	14.5
MT-817-C	0.330	30 x 90 x 140	● Ø 5-16 ■ 40 x 16	21
MT-814/3	0.620	85 x 56 x 195	● Ø 18-33	14.5
MT-815-C	0.650	44 x 108 x 173	● 5-40	30
MT-815-E			■ 16-40	
MT-815-S		44 x 126 x 173	■ 5-40	
MT-815-S1				
MT-1911-E	0.580	For permanent fixed point Ø 20 mm and round conductors Ø 8 to 18 mm		20
MT-1911-S1				
MT-1921-E	0.69	For permanent fixed point Ø 25 mm and round conductors Ø 10 to 25 mm		30
MT-1921-S1				



Earth clamps

Copper aluminium bronze earth clamps.



FOR BARE CONDUCTORS.

Reference	Weight (kg)	Connection	Conductors (mm)
MT-840/1	0.48	Thread: Ø 12.5 mm	● Ø 6-25 ■ 0-25
MT-841	0.48	Thread: ≤ Ø 12.5 mm	● Ø 6-25 ■ 0-30

FOR FIXED POINT.

Reference	Weight (kg)	Connection conductors (mm)
MT-1911	0.58	Spheric fixed points MT-2951 Ø 20 mm Round conductors Ø 8 to 18 mm
MT-1921	0.69	Spheric fixed points MT-3951 Ø 25 mm Round conductors Ø 10 to 25 mm

Fixed points



Reference	Sphere dimension	Weight (g)	Fixing
MT-2951	Ø 20 mm	130	Thread: M 12
MT-2951/1	Ø 20 mm	180	Bolt: M 12 - L = 35 mm
MT-2951/2	Ø 20 mm	200	Bolt: M 12 - L = 45 mm
MT-2950/35*	Ø 20 mm	247	Bolt: M 12 - L = 35 mm
MT-3951	Ø 25 mm	240	Thread: M 12
MT-3952	Ø 25 mm	240	Thread: M 16
MT-3951/1	Ø 25 mm	300	Bolt: M 12 - L = 45 mm
MT-3952/1	Ø 25 mm	350	Bolt: M 16 - L = 45 mm
MT-3950/35*	Ø 25 mm	300	Bolt: M 16 - L = 35 mm

Substation equipment

Short-circuiting
& earthing systems

From 1kV to 52kV

Padlocks, warning
signs and delineators

Safety equipment
& lamps

Short-circuiting
& earthing systems

Voltage detectors
and V.I.S / V.D.S

Saving kits

Insulating sticks for substation use

Telescopic sticks for voltage detectors
and earthing systems for use in dry
and wet conditions

IEC-61235 

Telescopic stick contains 2 elements made of resin polyester/glass
fiber foam filled tube, which slide together and are equipped with a
push button lock.

Reference	Rated insulation (kV)	Ø (mm)	Overall length (m)		Weight (kg)
			folded	extended	
CE-4-21*	90	41/32	1.15	2.00	1.50

* Add end-piece C, K or E

Fixed length stick for use in dry
and wet conditions

IEC-61235 

Manufactured from 36 mm dia. elements, with single 100 dia. skirts,
light and rigid, shock resistant.

Reference	Rated insulation (kV)	Ø (mm)	Overall length (m)	Weight (kg)
CF-5-40*	40	36	1.50	1.15

* Add end-piece C, K or E

Standard stick for use in dry conditions

Reference	Rated insulation (kV)	Ø (mm)	Overall length (m)	Weight (kg)
CF-3-72*	72.5	36	1.50	0.88

* Add end-piece C, K or E

Short length clamp stick

IEC-61235 

Reference	Ø (mm)	Overall length (m)	Weight (kg)
MG-115/1-S	32	1.50	2.40

Rescue stick

Reference	Rated insulation (kV)	Overall length (m)	Weight (kg)
CS-45	45	1.65	1



Wall mounted supports

For sticks and voltage detectors. Plastic. Delivered with wood screws.

Reference	Top	Bottom
CI-06-D	Ø 28-30 mm	Ø 36 mm max.
CI-10-D	Ø 28-36 mm	Ø 58 mm max.
CI-12-D	Ø 28-30 mm	Ø 58 mm max.



Top



Bottom

Substation equipment



From 1kV to 52kV

Padlocks, warning signs and delineators

Safety equipment & lamps

Short-circuiting & earthing systems

Voltage detectors and V.I.S / V.D.S

Saving kits

Voltage tester for M.V. separable connectors


Check the absence of voltage on the capacitive terminals of plug-in M.V. bushings.
Sensor in the form of a bent finger enabling removal and reinstallation of the terminal insulating cover.
Signal via beeping and bright red flashing of electro-luminescent diodes.
Built-in function test via the "TEST" button which covers the entire device.
Permanent stand-by state.
Power supply: four 1.5 V, R-6 batteries.
Mounting on insulating stick via a universal end.



CC-151-K	Tester in rigid case with batteries 70 x 100 x 165 mm - 0.70 kg
CC-45-K	Special 45 kV insulating stick L = 1.25 m - 0.6 kg

Voltage detector

For indoor use
Built-in device for checking operation of the led's indicator via a piezo-electric generator.
High-brightness led's indicator.
Sturdy thermo-plastic moulded case providing.
Pivoting contact electrode enabling wire contact at any angle.
Telescopic insulating stick.

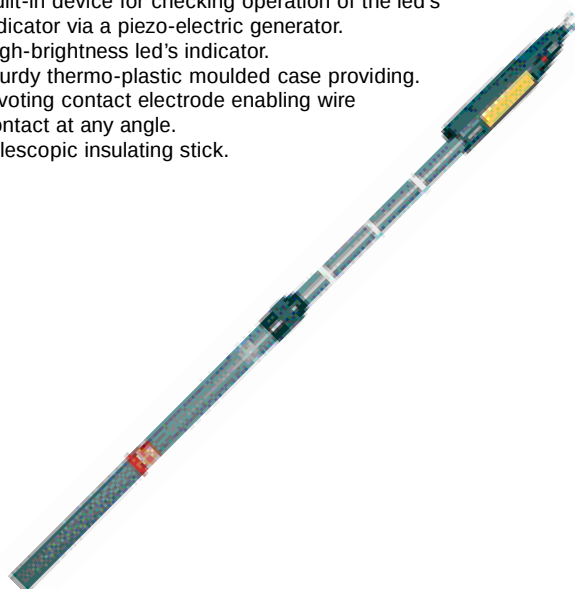

Operating voltage (kV)	Length (m)		Weight (kg)
	extended	folded	
5-40	1.26	0.85	0.95
CL-4-41/2	Delivered in a waterproof fabric case with strap Weight: 0.95 kg		

Permanent luminous indicator

Permanently installed on bus bars, luminous indicator signals the presence of voltage at a glance.
Single-pole 5 to 75 kV indicators.
Signaling the presence of voltage by 7 electroluminescent diodes.
For indoor use.



CL-40010	For round 5 to 20 mm Ø wires and 1 to 20 mm flat bars
----------	---

Voltage detector "compact serie"

For indoor use
This compact serie voltage detector is designed to be carried easily by operators.
Voltage presence is indicated by a high-brightness LED's indicator.
Built-in device for checking of the LED's indicator by a piezotest generator.
Equipped with a telescopic handle.

Delivered in holster.



Reference	Operating voltage (kV)	Extended	Folded	Weight (kg)
CL-2-5/36-2	5-36	0.7	0.3	0.4
CL-2-10/30-2	10-30	0.7	0.3	0.4

Electronic type detectors can also be used.
Please refer pages 86 and 87.

Substation equipment

Voltage detectors
and V.I.S / V.D.S

From 1kV to 52kV

Padlocks, warning
signs and delineators


Safety equipment
& lamps

Short-circuiting
& earthing systems

Voltage detectors
and V.I.S / V.D.S

Saving kits

We can deliver complete set with foot capacitance, head capacitance and wirings to your own specifications. Please consult us.

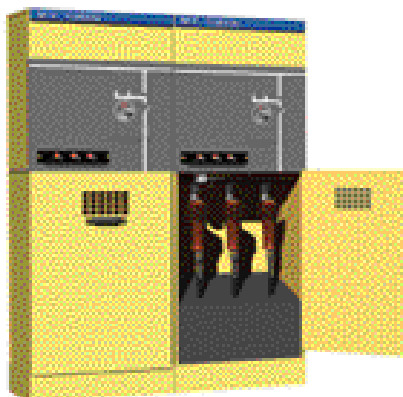

Integrated voltage presence indicating system (V.P.I.S)

Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers.
Voltage of use behind capacitive dividers: $V < 1\,000\text{ V}$.
Light threshold: 90 V.
Signalling: 3 neons.
Attachment: male/female plugs.

EC 61958



CL-495-3

Packaging: vinyl cover
Dimensions: 130 x 30 mm

Integrated voltage detecting system (V.D.S)

Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers.
Voltage of use behind capacitive dividers: 1 000 V (between phase and earth).
Light threshold: 70/90 V.
Input impedance: 36 M Ω .
Signalling by 3 red diodes.

IEC 61243-5



CL-497-00

Packaging: vinyl cover
Dimensions: 146 x 30 mm

Interface for integrated voltage detecting system (V.D.S)


Indicates the voltage presence on M.V. cubicles by being installed on the capacitive dividers.
For High impedance detecting systems
Input impedance: 36/43 M.
Voltage indication by 4 mm standard sockets on the front of the indicator.

IEC 61243-5



CL-498-00

Packaging: vinyl cover
Dimensions: 146 x 30 mm

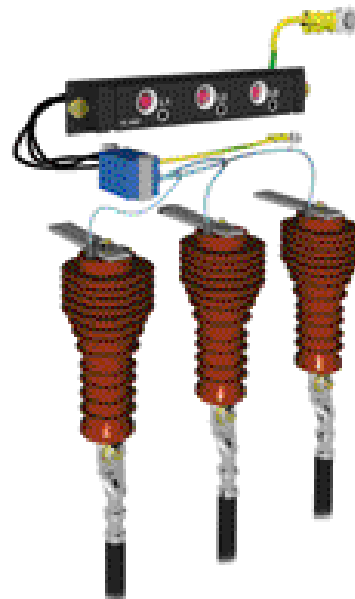

Sound phase comparator

The MX-404 sound phase comparator checks the concordance between 2 phases.
The comparator's operation is indicated by:
Emission of an audible signal when there is discrepancy between the two phases. Absence of an audible signal when there is no discrepancy between the two phases.
Power supply: 9V type 6LR battery.

IEC 61243-5



MX-404

Delivered in a storage box
Dimensions: 145 x 80 mm

Separable voltage detecting system (V.D.S)

This device enables to check the absence or presence of voltage on three phases (L1, L2, L3).
HR high impedance.
Voltage max: 1 080 V rms. 50/60 Hz.
Voltage presence: red flashing LED > 1 Hz.
Fits in CL-498 devices.

IEC 61243-5

CL-499/101



CL-499/101

Delivered in plastic bag

Substation equipment



Saving kits

From 1kV to 52kV

Padlocks, warning signs and delineators	Safety equipment & lamps	Short-circuiting & earthing systems	Voltage detectors and V.I.S / V.D.S	Saving kits
---	--------------------------	-------------------------------------	-------------------------------------	-------------

Life saving kits for M.V. substations

In case of an electrical accident, quick response is essential: seconds gained or lost can decide the life or death of a victim. Our life saving equipment is designed to make all necessary materials immediately available to rescue personnel. It includes:

- 1 rescue telescopic stick
- 1 voltage detector with flexible antenna contact (with autotest)
- 1 cable cutter with insulated handles Forged steel blades maximum opening: 30 mm
- 1 insulating platform, 24 kV or 36 kV high voltage Insulating gloves, insulating boots
- Safety instructions on the plastic board
- 1 talcum powder can.

CZ-54-R	Wall mounted panel 0.84 x 0.745 x 0.27 m 21 kg - With instructions in English - 24kV
CZ-54-MR	Same as CZ-54-R With instructions in English/Arabic - 24kV
CZ-55-R	Same as CZ-54-R except use tension: 36 kV
CZ-55-MR	Same as CZ-55-R With instructions in English/Arabic - 36kV



Compact carrying KIT

This compact kit is designed especially to be carried in a vehicle for safety electrical intervention. Made in two part (of moulded material: PEHD), the case is also on its red part, an insulating platform. Composition of the kit:

- 1 insulating platform
- 1 telescopic insulating stick
- 1 voltage detector with autotest
- 1 rescue hook
- 1 insulated cable cutter
- 1 pair of insulating gloves
- 1 pair of insulating boots
- 1 talcum powder can
- 1 safety instructions and safety first aid posters
- 1 adhesive tape (black and yellow).

CZ-53-R	710 x 570 x 240 mm - Weight: 18.5 kg with instructions in English - 25kV
CZ-53-MR	Same as CZ-53-R with instructions in English/Arabic - 25kV
CZ-53-R/2	Same as CZ-53-R except use tension: 36 kV
CZ-53-MR/2	Same as CZ-53-R/2 With instructions in English/Arabic - 36kV



Voltage detectors

IEC voltage detectors

From 1kV to 52kV

IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators

IEC electronic Voltage Detectors, "Compact serie" for indoor and outdoor use

Ultimate technology of voltage detector "Head Capacitive Technology"

IEC-61243-1



Compact and light

It offers:

- a wide band (10/36 kV)
- a universal application (50/60 Hz)

Voltage presence is indicated by:

- red flashing LED (very bright -visible at more than 20 m in direct lighting)
- powerful rated audible signal > 60 dB(A)/2 m

Operating check:

By pressing the TEST button, correct operation is indicated as follows :

- a red LED flashes on
 - sound signal
- (during and after this test, the timed green LED lights up. While remaining on, it indicates the good working order of the detector)

Characteristics:

- Detectors have unitary adjustment and are checked by routine test
- Dielectrically tested on substation bars (bridging test)
- Precise and stable operating threshold
- Reduced sensitivity to induced voltages
- Reduced sensitivity to interference field
- High environmental resistance (impacts, vibrations, moisture)

Use from 50 to 60 Hz

Temperature conditions: class N (IEC-61243-1 standard)

Storage and operation: -25/ +55 °C

Robust housing

Power supply: 1 x 9V alkaline battery type 6LR61

Contact electrodes fitted to the housing by screwing and are easily interchangeable

End fittings:

C = hexagonal 12 mm, for hexagonal end-fitting sticks

K = universal, for universal end-fitting sticks

Weight of the detector: 420 g

Size of the detector: Ø 59 x 270 mm

Packaging: unit supplied complete in a case with batteries and contact electrodes

Total weight: 1100 g

Total size: 340 x 275 x 83 mm

Recommended stick:

CE-4-21. See page 81.



CC-875-C

CC-875-K



C

K

Frequency 50/60 Hz

Reference	Operating voltage (KV)
CC-875-10/36*	10-36
CC-875-11/33*	11-33

* Specify type of mounting when ordering: C or K.

For other voltages, please consult us.

Voltage detectors



From 1kV to 52kV

- IEC voltage detectors
- Standard voltage detector
- Insulating sticks for voltage detectors
- Phase comparators

Standard electronic voltage detector for indoor and outdoor use

With a precise and absolutely stable operating threshold, the DETEX ELECTRONIC DETECTORS offer users maximum safety on MV lines and installations.



Double signalling

Voltage presence is indicated by both:

- extremely bright red flashing LED's (visible at more than 50 meters even in unfavourable light),
- powerful rated audible signal > 60 dB/2 m.

Checking

By pressing the test button, the operator checks that the detector is working properly. When the test button is released, a timed green LED lights, indicating both the detector is operational and the self testing of the unit continues.

Continuous monitoring conditions

High reliability

Tropicalized: -25 / +55 °C.

- housing made from polycarbonate with high mechanical properties and dielectric strength.

Removable electrode

Power supply

- four 1.5 V batteries type LR 6.

End fittings:

- "C" for hexagonal sticks.
- "K" for universal sticks.

Weight

500 g with batteries.

Packaging

Units supplied complete in a case with batteries and two contact electrodes (straight and V-shaped) - 390 x 90 x 90 mm
Weight: 0.800 kg.

Recommended sticks:

CE-4-21. See page 81.

Reference	Operating voltage (Ph/ph - kV)
CC-363*	5-36


* Specify type of mounting when ordering: C or K.

CC-365-101	Flag/Vee contact electrode
C-92-492	Contact electrode for installations L = 310 mm, insulated on 300 mm



CC-363-C

CC-363-K

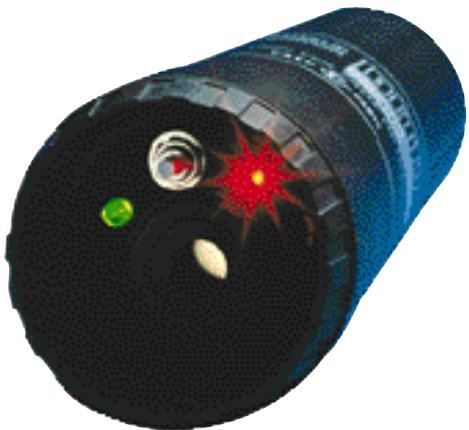

For other voltages, please consult us.

Voltage detectors

Insulating sticks
for voltage detectors

From 1kV to 52kV

IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators

Telescopic sticks for voltage detectors

Telescopic stick contains 2 elements made of **IEC-61235** 
resin polyester/glass fiber foam filled tube, which
slide together and are equipped with a push button lock.

Reference	Rated insulation (kV)	Ø (mm)	Overall length (m)		Weight (kg)
			folded	extended	
CE-4-21*	90	41/32	1.15	2.00	1.50

* Specify type of mounting when ordering: C or K.

Telescopic sticks for voltage detectors

Contains 2 elements: ****IEC-60855** 
A yellow lower element made of resin
polyester/glass fiber foam filled 41 mm diameter base tube.
An upper orange element made of glass fiber/resin epoxy foam
filled of 32 mm diameter (**).

Reference	Rated insulation (kV)	Ø (mm)	Overall length (m)		Weight (kg)
			folded	extended	
CE-75*	75	41/32**	1.15	2.00	1.20

* Specify type of mounting when ordering: C or K.

Extension for insulating sticks

Extension with a male end-piece.

IEC-61235 

Reference	Length (m)	Weight (Kg)
CM-7-10-A	1.00	1.10

Connection adaptors see page 99.



Voltage detectors



From 1kV to 52kV

IEC voltage detectors	Standard voltage detector	Insulating sticks for voltage detectors	Phase comparators
-----------------------	---------------------------	---	-------------------

Unlike single-pole voltage detectors, two-pole testers may detect differences in voltage between any two points of an installation. Essentially used for phase balance operations, they may also be used for two-pole detection operations and H.V. fuse checking.

Two-pole Phase comparators for indoor use

The DETEX CL-8-36 detect differences in voltage between any two points of an installation indicated by LED's. It also enables assessment of the order of magnitude of the residual voltage induced by nearby live lines or circuits, and thus differentiates it from the one provided directly from a high voltage source.


- Wide range of voltages: 2 to 36 kV.
- High luminosity.
- Compact: 0.62 m with probes dismounted.
- High dielectric quality insulating material.
- Two 1.25 m elements with removable probes, connected via a high-insulation lead.
- Max. use distance: 2.25 m (with probe extenders).
- Operation testing: with a checking device.



CL-8-36	CL-8-36 tester in plastic case 150 x 195 x 650 mm - Weight: 7.5 kg
CL-8-36/1	CL-8-36 tester with two probe extenders 0.550 m - cable, lenght: 2.87m delivered in plastic case 150 x 195 x 650 mm Weight: 7.8 kg

ACCESSORIES

C-92-20	Spare 0.550 m probe
CL-8-05	Probe extenders 0.550 m

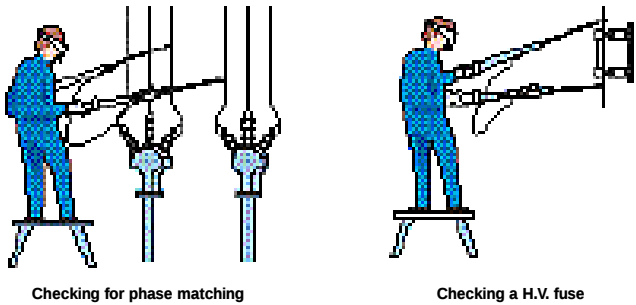

PIEZOTEST™ Separate testing device for phase comparator

Piezo-electric generator activated via a handle mechanism providing a high frequency voltage.
Metal contact at the tip of the device. This contact may receive the "banana" plug of the extension lead to facilitate testing on very long detectors.
Earth socket at the base of the unit receiving a plug for making closed-circuit tests.



CL-1-06	In case, with lead - 190 x 32 x 65 mm Weight: 0.300 kg
---------	---

Voltage detectors



From 1kV to 52kV

IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors

Phase comparators

Single pole phase comparator for indoor and outdoor use

Frequency and voltage phase memory.
Integrated TEST push-button.
Orange LED = indication that frequency and voltage are in memory.
Green LED = phasing indication.
Red LED = non-phasing indication.
Powered by a 6 LR 61 9 V battery.
Delivered in carrying case.

IEC-61481



Reference	Voltage (kV)	Length of antenna (m)
CL-7-06/18*	6-18	0.55
CL-7-10/30*	10-30	0.85
CL-7-10/30-1*	10-30	1.15
CL-7-12/36*	12-36	1.20

* Please specify type C or K when ordering.

Two-pole phase comparator for indoor and outdoor use

Precise indications provided by the galvanometer needle;
dials are calibrated according to voltage.
Assessment of the voltage value on testers/measurers.
Complete function testing:
- built-in, with TEST push-button (battery supplied).
Consists of two elements connected by a high-insulation lead.
Removable handles.
Device delivered in metal case.
140 x 250 x 850 mm - 7.5 kg.



Reference	Voltage (kV)	Dial scale (kV)	Observations
Phase tester			
CL-5-33-GB	11-33	11-33 A.C/D.C	straight and angled antennae
CL-5-36	5-36	5-10-15-20-25-30-36 A.C/D.C	straight antennae
Tester-measurer			
CL-5-03	0.75-3	0.75-1-1.25-1.5-3 A.C/D.C	straight antennae

Voltage detectors



From 1kV to 52kV

IEC voltage detectors

Standard voltage detector

Insulating sticks for voltage detectors



Phase comparators

Wireless phase comparator

NEW !

The wireless phase comparator allow to check if the 2 active conductors' voltage are in phase or not.

- On electrical networks 50/60Hz from 1kV to 232kV.
- Distances between both points of measurement until 80m in open field.
- Wireless and without maximum time measurement.
- Autotest of the receiver, the transmitter and good radio link between both device.
- IEC 61481 (phase comparator).
- Sound and luminous indication:
Green diodes: synchronization (angular difference lower $\pm 10\%$).
Red diodes: no synchronization (angular difference superior $\pm 30\%$).
- Communication frequency 433 MHz. Battery 9V.

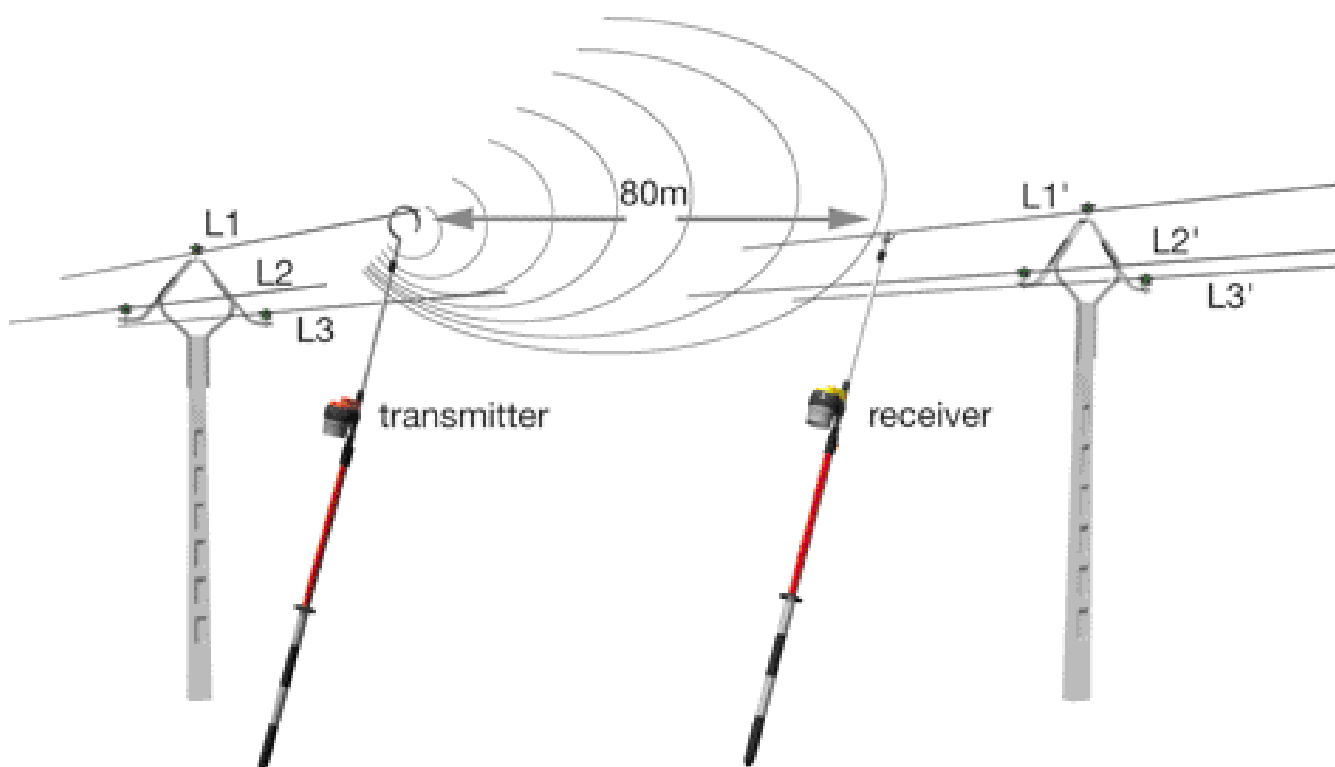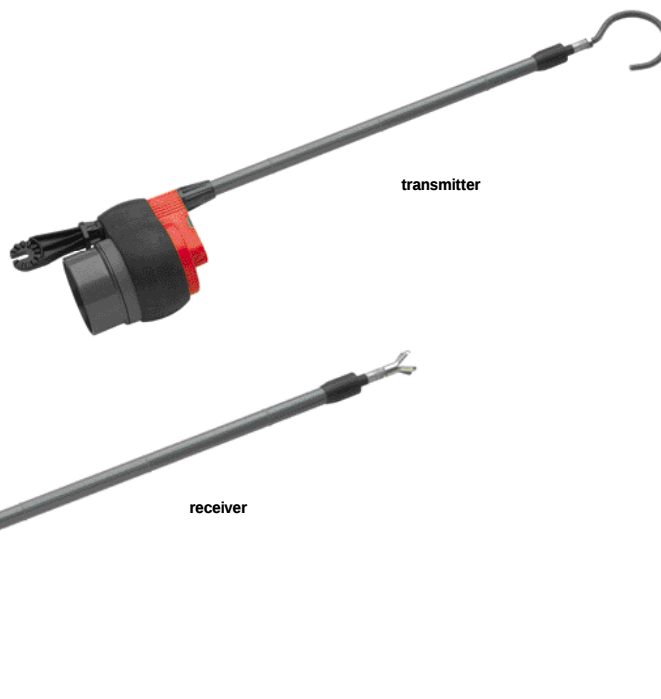

Reference	Voltage (kV)	Length of antenna (m)	Weight (kg)
CL-12	1-232	0.6	1.750

To be use with insulating sticks: CM-4400 and CM-4600 series (see page 96 and 124) and K end-pieces adaptors (see page 99).

Short-circuiting and earthing systems

Cables

From 1kV to 52kV

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Copper and aluminium cables

Copper cables

Extra flexible braided multi-strand cables.


- A** Transparent PVC sheath, with cable section identification.
- B** Transparent silicon sheath according to IEC-61230. Resistant to temperature variations (-40 °C to +70 °C) with double IEC triangle marked on cable section.

IEC-61481



	A	B IEC-61481	Rating (kA/1s)	Cable Weight (kg/m)	Ø (mm)	Section (mm²)
M-24-10			2	0.105	4.5	10
M-24-16		M-24-16-S	3.5	0.156	5.6	16
M-24-25		M-24-25-S	6	0.275	7.5	25
M-24-30			7	0.330	8	30
M-24-35		M-24-35-S	8	0.386	9	35
M-24-40			10	0.440	9.5	40
M-24-50		M-24-50-S	12	0.545	10	50
M-24-70		M-24-70-S	16	0.768	12	70
M-24-75			20	0.800	12	75
M-24-95		M-24-95-S	20	1.000	14	95
M-24-120		M-24-120-S	30	1.280	17	120
M-24-150		M-24-150-S	40	1.630	19	150

Copper cables only: Heating curves (Gut & Grundberg method)

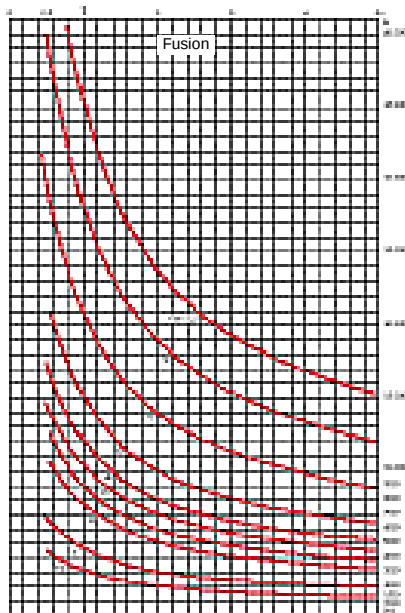

Aluminium cables

Extra flexible braided multi-strand cables.
Transparent PVC sheath, with cable section identification.




Reference	Rating (kA/1s)	Cable Weight (kg/m)	Ø (mm)	Section (mm²)
M-28-50	7.0	0.170	11.5	50
M-28-70	10.0	0.240	13.4	70
M-28-120	17.5	0.430	19.00	120
M-28-150	20.0	0.510	21.00	150

Jumper cables realisation specially manufactured items




Quotations in accordance with faisability.
For all details:
Tel.: 33 1 42 31 46 24 / www.catuelec.com

Copper cables only: Heating curves - 300 °C

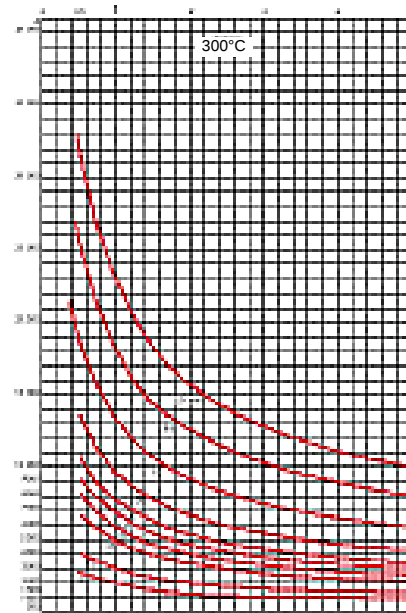

Short-circuiting and earthing systems



From 1kV to 52kV

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

In the context of the IEC-61230 international standard, CATU offers and answers to your needs with a large range of short-circuiting and earthing systems for substations and lines. These equipments are fitted with silicone-sheathed cables and double-crimped lugs at both ends: crimped once to the cable itself and once to the cable envelope.


This type of connection has been mechanically tested by simultaneous traction and twisting, followed by a proofing test in a soda bath. Before the short-circuiting tests, all components of this equipment are subjected to a cycle in a saline mist, to provide artificial ageing.

IEC short-circuiting and earthing systems (three-phase crossarm networks)

MT-613 clamps are automatic contact clamps. They are put into position from above the conductor, using the clamp dispenser head MT-635/1-C, which gives remarkable rapidity and ease of handling. Removal is carried out by pulling down the clamp, which revolves around the conductor by means of the pig tail fixed in the centre of the clamps dispenser head.

IEC-61230 

Characteristics	MT-6613	MT-6613/1
Rating	8 kA/1s	25 kA/0.5s 17.5 kA/1s
Connection copper cable between clamps (mm ²)	35	95
Earth connection copper cable (mm ²)	16	35
For conductors Ø (mm)	5 to 30	5 to 30
Recommended sticks**	CE-4-21-C (P. 74)	CF-5 serie (P. 88) CM-4400 serie (P. 88)

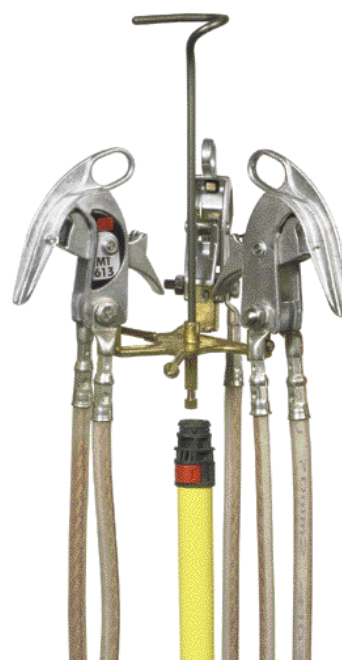

Earth rod - 1 m:

MT-650/MT-652/10 or MT-652/15 to be ordered separately.

** To be ordered separately.

Reference	Rating	Equipment composition
MT-6613	8 kA/1s	- 3 automatic contact clamps MT-613 - Connection cables 35 mm², max. gap between clamps: 2.75 m - 1 clamp dispenser head MT-635/1-C - 1 spool with earthing cable connection MT-640-S - 1 carrying bag M-87295
MT-6613/1	25 kA/0.5s 17.5 kA/1s	- 3 automatic contact clamps MT-613 - Connection cables 95 mm², max. gap between clamps: 2.75 m - 1 clamp dispenser head MT-635/1-C - 1 earthing cable connection 15 x 35 mm² - 1 earthing clamp MT-840/1 - 1 carrying bag M-87295

For earthing systems to your own specification please see page 129.

Short-circuiting automatic contact clamps

Aluminium alloy.

Reference	Rating	For conductors Ø (mm)
MT-613	25 kA/0.5s or 17.5 kA/1s	5 to 30
MT-613/1	10 kA/1s	5 to 30
MT-613/2	8 kA/1s	5 to 30



MT-613

MT-613/1
MT-613/2

Short-circuiting and earthing systems

Overhead line systems

From 1kV to 52kV

Cables

Overhead line systems


Insulating sticks

Specific sticks and bags

Underground systems

Clamp dispenser heads

Copper aluminium alloy.

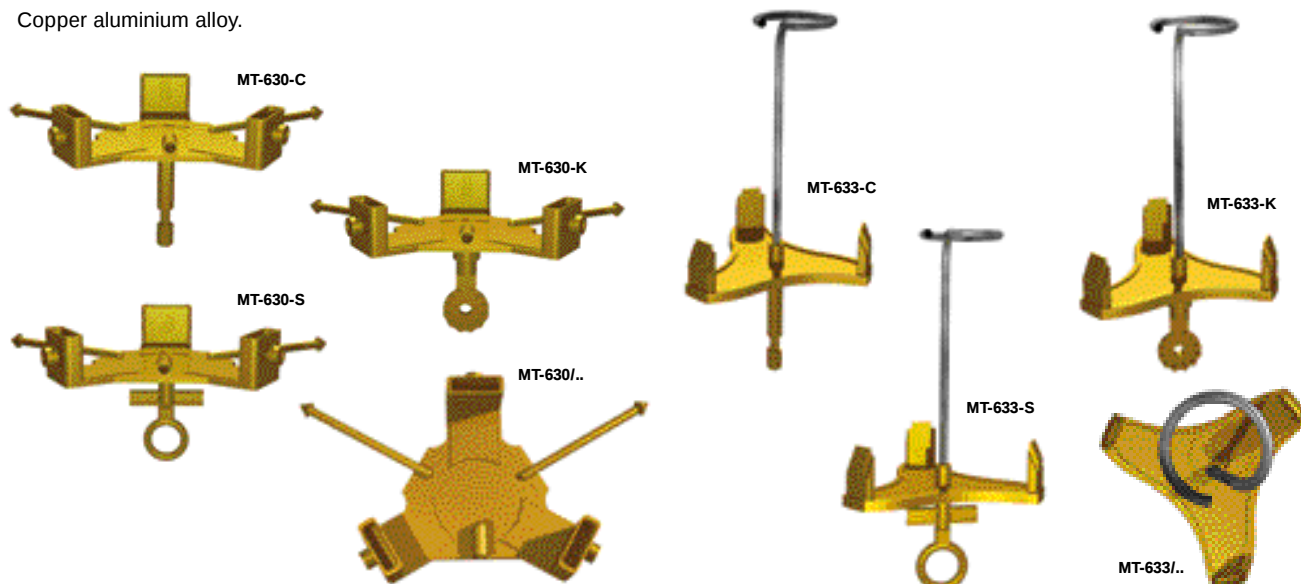

For MT-613 clamp

Reference	Head for 3 clamps	Head for 4 clamps	With pigtail hook
MT-630-C	n		
MT-630-K	n		
MT-630-S	n		
MT-635/1-C/K/S	n		n
MT-634-C/K		n	

For MT-613/1 and 613/2 clamps

Reference	Head for 3 clamps	Head for 4 clamps	With pigtail hook
MT-633-C	n		n
MT-633-K	n		n
MT-633-S	n		n
MT-634/1-C/K		n	n

Earth rod

Reference	Characteristics	Length (m)
MT-652/10	Screw ground rod.	1
MT-652/15	Screw ground rod.	1.50
MT-650	Hexagonal section rod.	1



Earth clamp

Copper aluminium bronze earth clamps.



Reference	Weight (kg)	Conductors (mm)
MT-840/1	0.48	● Ø 6-25 — 0-25
MT-843	0.95	● Ø 6-35 — 0-35

Spool with earthing connection


Spool with cable and earth clamp.

IEC-61230



Reference	Silicone cable (mm²)	Length (m)
MT-640-S	16	16
MT-641-S	16	25

Short-circuiting and earthing systems



From 1kV to 52kV

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Short-circuiting and earthing systems (mid-span horizontal configurations, work from ground)

Icc	Connecting cables	For conductors
8 kA/1s	35 mm ²	3-22 mm Ø


Installed from the ground on conductors up to 10.50 m.
Self locking contact clamp: powerful conductor clamping and very good performance at short-circuiting, does not slide.

PELICAN 2

- Easier installation features.
- More rigid metallic stick.
- Lower tube 30.6 mm dia.
- Upper tube 16 mm dia.
- Re-inforced insulated stick (36 mm dia.).
- Antisliding gripping area on the insulated stick: improves operator's grip.

Self locking clamp


Absence of spring increases reliability, facilitates cleaning and removal.

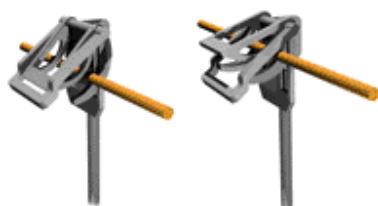

Used to check voltage absence beforehand

With a CC-375 IEC or CC-875 IEC series detector.
Attached with a flag use contact electrode to one of the metallic stick.

Packaging

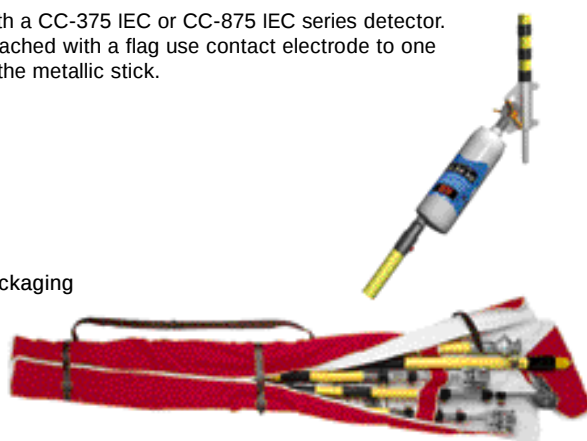

Equipment composition

Reference	Icc (kA/1s)	Composition
MT-508/36	8	3 telescopic metallic sticks 3 elements MT-512/36 - L = 6.00/2.37 m - 2.4 kg 1 insulated stick MT-531 2 elements 1.65 m Reel for 3 cables 10 m x 35 mm ² with earth connect. for attachment to stick - MT-543/35 1 earth rod 1 m MT-650 1 bag M-87127: 2.50 x 0.30 x 0.15 - 10.5 kg
MT-508/46	8	3 telescopic metallic sticks 4 elements MT-512/46 - L = 5.10/1.62 m - 2.1 kg 1 insulated stick MT-531 2 elements 1.65 m 1 insulated intermediate stick element 1.65 m CM-4-165-B Reel for 3 cables 10 m x 35 mm ² with earth connect. for attachment to stick - MT-543/35 1 stick lifter MT-546 1 earth rod 1 m MT-650 1 bag M-87-208: 1.70 x 0.30 x 0.20 m - 11.3 kg with separate parts: - cable reel 0.42 x 0.42 x 0.14 m - 13.2 kg - rod - 2.2 kg

Short-circuiting and earthing systems



From 1kV to 52kV

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Insulating sticks for short-circuiting and earthing systems

These 39 mm dia. elements are assembled using a new safety bayonet system connector in aluminium alloy. They allow construction of a large variety of custom made sticks that meet the most varied conditions of application. Calibrated lengths of 1 to 3 meters (with fraction of 0.50 m) permit a huge number of applications.

This range thus allows a stick-length limitation in case of space requirements and carrying capabilities. For common applications a serie of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.


Reference	Complete stick length (m)*	Complete stick length (m)**	Insulating length (m)	Weight (kg)
Basic elements				
CM-4410	1.13		0.7	1.25
CM-4415	1.63		1	1.70
CM-4420	2.13		1.2	2.70
CM-4425	2.63		1.5	3.20
Intermediate elements				
CM-4410-I	1.165		0.9	1.20
CM-4415-I	1.665		1.4	1.60
CM-4420-I	2.165		1.9	2.50
CM-4425-I	2.665		2.4	3.00
Terminal elements				
CM-4410-*	1.115	1.21	0.9-1	0.90
CM-4415-*	1.615	1.71	1.4-1.5	1.30
CM-4420-*	2.115	2.21	1.9-2	2.10
CM-4425-*	2.615	2.71	2.4-2.5	2.60
Intermediate elements with rain skirts				
CM-4400-J	0.36			0.95

* Add end piece C, K, E.

• With the smallest end fitting.
•• With the biggest end fitting.



CM-4400-J

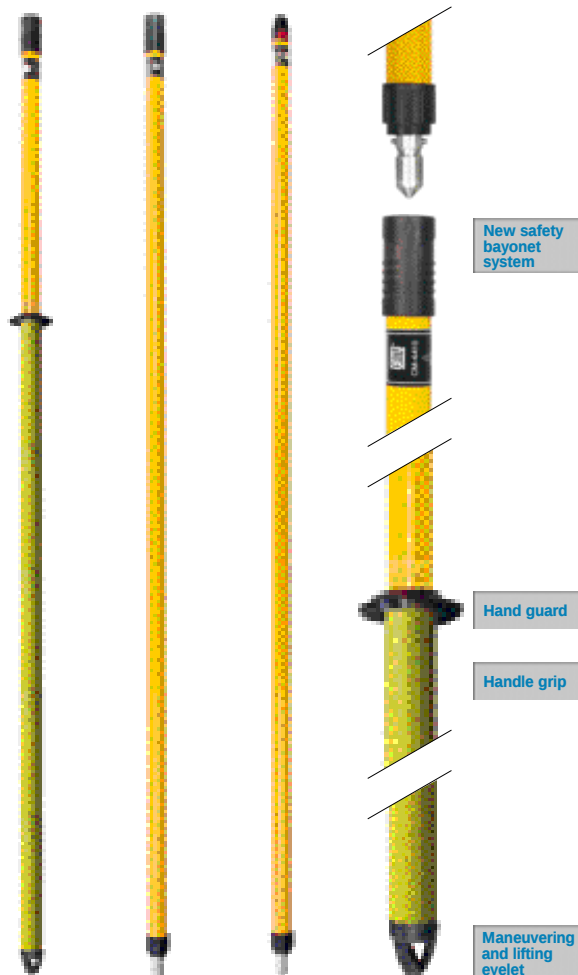

Sticks with rain skirts, C, K or E terminals

Epoxy reinforced fibre-glass insulating Ø 36 mm. IEC-61235 ⚠
Shock resisting polycarbonate rain skirts Ø 100 mm, height 90 mm.


Reference	Length (m)	Rain skirt number	Weight (kg)
CF-5-40*	1.50	1	1.150
CF-5-90*	2.00	1	1.550

* Add end piece C, K, E.


Stick covers

Strong waterproof fabric, strap for carrying for CM-4 and CM-7.

Reference	Elements length (m)	Overall dimensions (m)
CM-3-03	1.75	0.575 x 1.950
CM-3-04	2.00	0.575 x 2.450
CM-3-05	2.50	0.575 x 2.950
CM-3-06	3.00	0.575 x 3.400

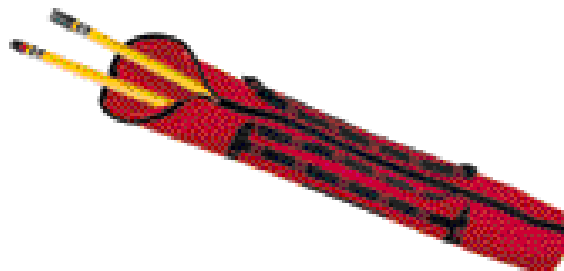

Short-circuiting and earthing systems



From 1kV to 52kV

Cables

Overhead line systems

Insulating sticks

Specific sticks and bags

Underground systems

Clampsticks

For operations carried out on dead line networks.

Clamp stick for M.V. systems.

Cylindrical tubular rod Ø 32 mm in laminated epoxy glass fiber foam-filled.

Test voltage: 100 kV applied for

1 min, between alternate electrodes 30 cm away from one another.

Plastic control rod reinforced with glass fibre Ø 10 mm.

Rack-system operating handle, with 3 positions.

Suspension hook on the upper part.

Protective cap on the lower part.

Standard clampsticks

Reference	Length (m)	Weight (Kg)
MGS-100-S	2	2.8
MGS-103-S	3.80	4.3



MGS-103-S


Telescopic measuring stick

8 telescopic sections of insulated polyester glass, graduated and operated by a push-button mechanism.

Upper portion made of high voltage "live working tool" quality orange epoxy glass.

Direct reading at the top of the 1st section of the stick.

Max. length: 12 m Folded length: 1.50 m - 3.3 kg.

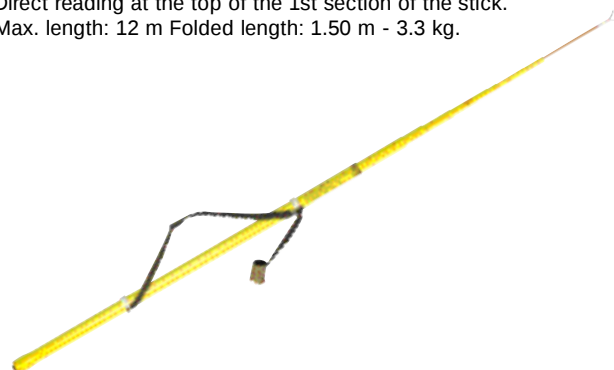

MO-832

Max. length: 12 m - For use on L.V., M.V., H.V. lines 220 kV max.

Telescopic and disconnect telescopic sticks

Sections made of reinforced high density electrical grade fiber glass.

Top sections insulated with fire retardant polyurethane foam core.

Tip section: triply reinforced to eliminate breakages.

Universal head adaptable to standard fit or accessories, K end-pieces.

Test: 100 kV/30 cm - 5 minutes.



CE-5-50-(*)	Max. length: 5 m - Weight: 2.50 kg
CE-5-60-(*)	Max. length: 6 m - Weight: 3.00 kg
CE-5-70-(*)	Max. length: 7 m - Weight: 3.50 kg
CE-5-90-(*)	Max. length: 9 m - Weight: 4.00 kg
CE-5-105-(*)	Max. length: 10.50 m - Weight: 5.50 kg

* add the end-piece reference C or K.

Static discharge stick

Static discharge stick until 50kV.



Reference	Composition	Length (m)
CM-50	Medium voltage static ground discharger	1.5




Short-circuiting and earthing systems

Specific sticks and bags		Underground systems		
Cables	Overhead line systems	Insulating sticks	Specific sticks and bags	Underground systems

Short-circuiting and earthing systems for underground cables

Cable testing stick


Enables piercing of cable insulation and shielding, earthing up to 50 kV.
Double bezel cutting blade
Capacity: 70 mm dia.
Cable-guide with protecting guide.
0.60 m insulating sleeve with 0.80 m extender.
Ratchet type operating handle.
Woven copper earth wire 70 mm² x 2.50 m with earth clamp.

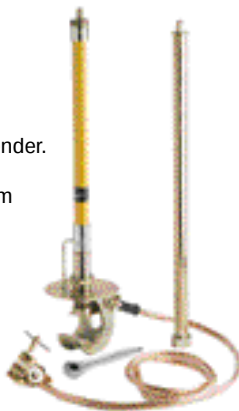

MP-211 Total length: 1.60 m - Weight: 8.75 kg

Insulating blanket

Must be placed over the piercing point. 0.90 x 0.90 m with 50 mm Ø hole in the centre for inserting the sleeve.



MP-212 Dimensions: 0.9 x 0.9 m

Spade-cable

Device to test the voltage on underground cables (1st and 2nd categories) and their earthing, using a system with cartridges and throwing in the cable a steel treated blade.




MP-213 Spade-cable delivered complete in suitcase
Weight: 20 kg

MP-213/LAM Spare blade for spade-cable MP-213
Weight: 0.02 kg

MP-213/EXT Blade extractor for spade-cable MP-213
Weight: 0.20 kg

Fuse holder stick


For removing fuses in substations.

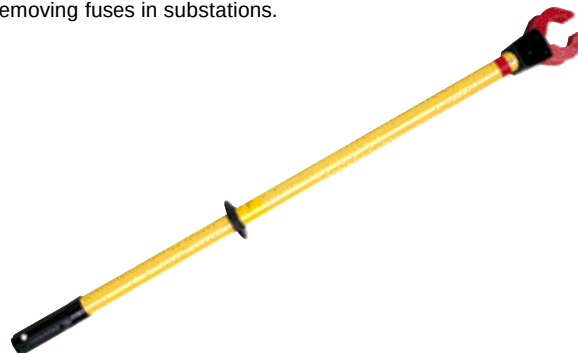

MO-630 Total length: 1.165 m Weight: 1.7 kg

Elbow and fuse puller tool

These tools facilitate live working, removing of fuses, elbowconnectors and other components, upto 3 1/4" in diameter. The orientable jaws, enable this tool to takecomponents in all angles, jawsare openedand closedby rotating the pole.

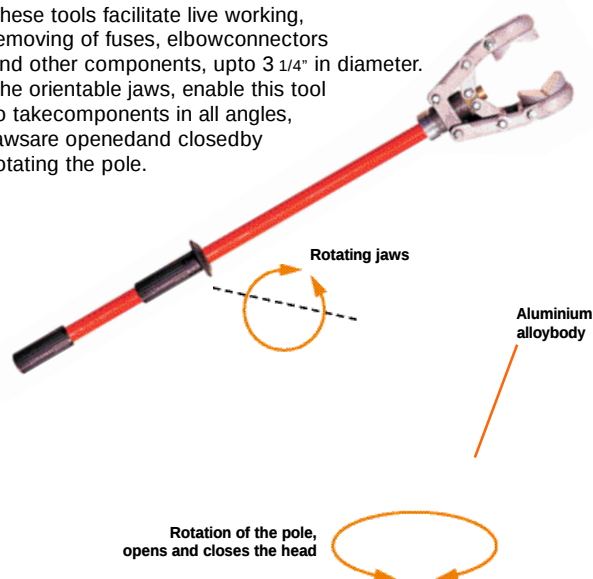

Reference	Lenght (m)	Weight (kg)
MO-833	1.8	3.8
MO-834	2.4	4.5

Stick bags

Strong waterproof fabric, strap for carrying.



Reference	Max. stick length (m)
CM-1-10	1.30
CM-1-15	1.80
CM-1-20	2.40

Connection adaptors for insulating sticks

	C  hexagonal	K  universal	E  bayonet	S  clamp-stick	A or B  "MAJOR" Serie CM-4/CM-6/CM-7							
Accessories	C 		K 		E 							
Connection adaptors	 CI-7-C	 CI-3-C	 CI-6-C	 CI-5-C	 CI-3-K	 CI-4-K	 CI-6-K	 CI-7-K	 CI-5-K	 CI-3-E	 CI-7-E	 CI-4-E
Sticks	 E	 A B	 K	 S	 A B	 C	 K	 E	 S	 A B	 K	 C

With this range any accessory can be attached to any stick by using connection adaptors. Other models, please consult us.

General tools

Sticks accessories

Sticks accessories

Tensioning equipment

From 1kV to 52kV

Handling and uncoiling blocks

Manoeuvring hook



CM-02-C



CM-02-K

CM-02* Bronze-copper nickel aluminium
Weight: 0.120 kg

* Add end-piece C, E or K.

Conductor brushes


Pivoting - 95 x 90 x 64 mm
Weight: 0.090 kg.



MG-206-AK Moulded red colour body with card.
Reserved for aluminium conductors.

MG-206-CK Moulded red colour body with card.
Reserved for copper conductors.

Pivoting - 110 x 110 x 70 mm - Weight: 0.250 kg.



MG-354



MG-352

MG-352-K Moulded orange colour body with card.
Reserved for aluminium conductors.

MG-352-VK Moulded green colour body with card.
Reserved for copper conductors.

MG-353-R Orange spare brush for MG-353-V.
For hand brushing use.

MG-353-V Green spare brush for MG-353-V.
For hand brushing use.

MG-354-K Round brush - Ø 58 x 100 mm
Weight: 0.250 kg

MG-355 Spare brush for MG-354-K.

Diameter gauge

For conductors 3 to 16 mm Ø.
Entirely insulated material 270 x 35 x 12 mm.
Delivered in bag.



MD-535-K Weight: 0.090 kg

Pig tail hook

Bronze end piece.
Spiral rod of corrosion-proof steel.



MG-207-K K end-pieces steel - 120 x 65 x 60 mm
Weight: 0.210 kg

MG-207-S S end-pieces steel - 250 x 65 x 60 mm
Weight: 0.280 kg

Cleaning brushes



MD-12-C



MD-10-C



MD-14-C

MD-10-C Concave brush with two rows of
perpendicular bristles
100 x 125 x 170 mm - 0.500 kg

MD-12-C Round head brush Ø 175 x 228 mm
0.500 kg

MD-14-C Adjustable hinged round head brush
Ø 175 x 328 mm - 0.500 kg

Trimmer and pruning saw



MD-40-B



MD-42-B

MD-40-* Trimmer, maximum capacity Ø 45 mm
(for branches up to 28 mm depending on
tree species) - 375 x 240 x 60 mm - 1.200 kg

MD-42-B Pruning saw on rigid frame, 34 cm blade
125 x 610 x 60 mm - 1.100 kg

M-92-28 Replacement blade

* Add end-piece B or K.

Fuse puller

All parts in metal protected against corrosion.
Jaws sheathed with plastic.
Capacity : up to Ø 70 mm.



CM-04-K Overall dimensions: 230 mm x 80 mm

Automatic come-along clamp

For non-insulated conductors: alloy, ACSR, alu, steel.

Characteristics

Steel body - mild bronze jaws.

Field on use

Overhead network.

Working method


Distance method.

Function use

The AUTOMATIC COME-ALONG CLAMPS

are used to produce an anchoring on a line conductor in view of:

- moving it lengthwise
- locking it in position
- alternating its mechanical tension.



Reference	mini	Ø (mm)	max.	Max. working load (daN)	Jaws length (mm)	Max. length (mm)	Weight (kg)
MO-339/02	5.54		13.97	3 636	127	400	2.84
MO-339/03	13.46		18.8	3 636	140	450	3.52

Automatic come-along

For alu, alu alloy or ACSR.

Reference	Ø cable (mm)	Working load (daN)	Weight (kg)
MO-332/09-D	2.6-9.4	800	1.000
MO-332/14-D	6.4-14.3	1 500	1.300
MO-332/13-E	6-14	800	2.600
MO-332/18-E	10-20	1 400	4.000



Insulated cables.

Reference	Ø cable (mm)	Working load (daN)	Weight (kg)
MO-331/13-P	6-13.5	600	1.000
MO-331/22-P	17-22	400	1.000
MO-331/38-P	33-38	800	3.775



Come-along

Not suitable for alu conductors.




Reference	Clamping capacity Ø (mm)	Weight (Kg)
MO-337/06	1-8	0.300

Adjustment "Come-along"

Tightening by cam jaw.

For copper and aluminium conductors.



Reference	Clamping capacity Ø (mm)	Weight (Kg)
MK-08	2-18	0.300
MK-15	7-15	0.550
MK-20	14-18	0.3600

General tools

Tensioning
equipment

From 1kV to 52kV

Sticks accessories

Tensioning equipment

Handling and uncoiling blocks

“TIRFOR” and “JOCKEY” winches

System traction produced by jaws which reproduces movement of hands pulling on cord, thus making it possible to enter an unlimited cable length.



Reference	Type	Maximum force (daN)**	Requirements (cm)	Weight without cable (kg)	Cable weight (kg)
ML-05/10	Jockey J-5	500	31 x 21.5 x 5.5	4	2.5
ML-08/20*	T-508	800	42 x 25 x 9.9	6.6	7
ML-16/20*	T-516	1 600	53 x 31.5 x 12.7	13.5	12.5
ML-32/20*	T-532	3 200	63.1 x 35.7 x 14.8	24	26

*Equipment delivered with 20 m cable equipped with hook.

**The first number indicates the maximum authorized lifting load.

“TIRVIT” mechanical adjusters

The conductor to be adjusted is directly clamped between two cam jaws which alternately approach and move away from each other by lever manœuvring. Very simple, sturdy and reliable, the Tirvit is the ideal apparatus for tightening up small and medium section lines. It is equipped with a chain and handle for fixed anchoring.



Reference	Force (daN)	Clamping capacity Ø (mm)	Total - Length (m) - lever		Weight (kg)
MK-40	400	2-8	0.680	0.540	4.000
MK-60	600	7-15	0.780	0.630	5.200
MK-100	800	14-18	0.875	0.700	6.200

Parallel jaws “Come-along”

Reference	Conductor size Ø (mm)	section (mm²)	Safe load (daN)	Weight (kg)
MO-331/06-A	8.5	25-35	1 000	0.800
MO-331/09-A	12	50-70	1 700	1.100
MO-331/12-A	16	95-120	3 000	1.800
MO-331/04-B	1-4	1-16	500	0.270
MO-331/08-B	3-8	6-35	1 000	0.800
MO-331/10-B	5-10	16-70	1 700	1.100
MO-331/16-B	8-16	50-150	3 000	1.900
MO-331/26-B	8-26	90-400	4 000	3.700

For bare cables (material: forged steel).

References are followed by the index A or B to indicate:

A - Suitable for use with aluminium conductors
(including all aluminium alloys),

B - Suitable for use with copper or steel conductors.



General tools

Handling and uncoiling blocks

From 1kV to 52kV

Sticks accessories

Tensioning equipment

Handling and uncoiling blocks

Uncoiling block

For bare cables.

Made entirely from aluminium alloy.

Pivoting safety hook. Full wheel rigger. Ring with greaser.

Safety catch.

For insulated cables.

Single piece body made of aluminium alloy. Nylon strap (length 1.5 m) firmly attached to the body equipped with automatic ratchet tightener.

Maximum load of use: F1: 800 daN, F2: 400 daN, F3: 120 daN.

Reference	Utilisation	Groove bottom diameter (mm)	Capacity (mm)	Maximum load (daN)	Hook capacity (mm)	Weight (kg)
MO-375/150	Bare cables	160	22	1 000	25	1.55
MO-375/250	Bare cables	250	38	1 000	25	2.1
MO-375/300	Bare cables	300	36	1 500	25	2.85
MO-375/400	Bare cables	400	80	2 000	NC*	15.0
MO-371/01	Insulated cables	140	80	800	24	1.5

MO-371/100	Bracket with strap for MO-371/01	-	800	-	2.2
------------	----------------------------------	---	-----	---	-----

* NC : not communicated.



Opening block

For elevation handling, single block and tackle and return block.

Can also be used as uncoiling block.

Aluminium alloy - block assembled on needle bearings.

Block Ø at groove bottom: 114 mm.

Maximum rope Ø: 16 mm.

Permissible load on rope strands: 250 daN.

Hook opening: 33 mm.

MO-308	Weight: 3 kg
--------	--------------



Ratchet lift-chain hoists

Precise: 1.3 to 0.3 mm travel.

Aluminium alloy body and lever.

360° short lever used without large effort.

Chain can enter from all angles.

Three position selector:

up - down - free chain.

Safety factor > 5.



Reference	Maximum lifting load (kg)	Overall width (mm)	Weight (kg)	
			run 1.50 m	run 5.00 m
MO-431/07	750	84	7.00	-
MO-435/07	750	84	-	10.35
MO-431/15	1 500	108	11.00	-
MO-435/15	1 500	108	-	15.80
MO-431/30	3 000	115	20.00	-

Guying equipment

Used whenever pole stability is doubtful.

Hinged jaw device installed, from the ground, at a 6 to 8 m height using connectable rods.

Guy wires fixed on jaws and staked to the ground by rods ensure pole stability.

Forged hot galvanised steel jaws, test load: 1 000 daN.

Control rod 6 m in elements of 1.20 m, aluminium alloy. Set of ropes: 3 guy wires 11 or 15 m + a strap with centre ring - with heart shaped thimble and snaps.

3 steel anchoring rods, 1 m.



MP-315 Guying equipment with 15 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods with carrying belt - 26.5 kg

MP-311 Guying equipment with 11 m guy wires in metallic box 480 x 340 x 200 mm and control rod + rods - 22 kg

Earth rods

Earth rods

Connectors

From 1kV to 52kV

Earth rods

Connectors

Earthing clip

Earth tester

The rod is, in most cases, the most practical, effective and reliable earth connection means.

Highly effective: for a given contact surface area, the linear type electrode provides, both theoretically and practically, the least earth resistance. Furthermore, it enables the most moist and conductive layers to be reached.

Easy and quick to install, it requires no earth work. Even inside industrial buildings, it is often possible to install an earth rod exactly where required by breaking through a small area of the floor.

Accessible and testable connection: the use of an inspection box makes it possible to leave the head of the rod and its connection unburied and to periodically test it and measure its resistance.

Self connectable rods

The lower end of each rod is equipped with a point used both for driving into the earth and for connection; the upper pierced end receives (without the sleeve) the point of the previous rod. Use a riveting head so as not to damage the upper end when driving in.

Connectable rods

Conical slide-in provides perfect assembly stability. For deep earth connections.

Copper/steel (350 µm coating) earth rods

Reference	Type	Ø (mm)	Length (m)	Weight (kg)	Connection
TP-1610-R	standard (1)	14.2 Unit 16	1.0	1.200	
TP-1615-R	standard (1)	14.2 Unit 16	1.5	1.800	
TP-1620-R	standard (1)	14.2 Unit 16	2.0	2.400	
TP-1910-R	standard	17.3 Unit 19	1.0	2.000	
TP-1915-R	standard	17.3 Unit 19	1.5	2.800	
TP-1920-R	standard	17.3 Unit 19	2.0	3.600	
TR-116-10	self connectable	14.2 Unit 16	1.0	1.100	TO-3-16/19 TO-2-16 TS-1601
TR-116-15	self connectable	14.2 Unit 16	1.5	2.000	
TR-119-10	self connectable	17.3 Unit 19	1.0	1.800	TO-3-16/19 TO-2-19 TS-1901
TR-119-15	self connectable	17.3 Unit 19	1.5	2.750	
TR-119-20	self connectable	17.3 Unit 19	2.0	3.500	
TR-1610	connectable (2)	14.2 Unit 16	1.0	1.250	TO-3-16/19 TO-2-16 TS-1601 TS-1602 TS-1603
TR-1615	connectable (2)	14.2 Unit 16	1.5	1.900	
TR-1620	connectable (2)	14.2 Unit 16	2.0	2.500	
TR-1910	connectable (2)	17.3 Unit 19	1.0	1.950	TO-3-16/19 TO-2-19 TS-1901
TR-1915	connectable (2)	17.3 Unit 19	1.5	1.850	
TR-1920	connectable (2)	17.3 Unit 19	2.0	3.750	




Stainless steel earth rods

Reference	Type	Ø (mm)	Length (m)	Weight (kg)	Connection
TRI-1610			1.0	1.450	
TRI-1615	connectable	16	1.5	2.200	TZI-2001

Connectors

Reference	Rod	Conductors Ø max. (mm)	Type section max. (mm²)
TO-2-16 TO-2-19	16 19	40 40	Copper
TO-3-16/19	19	40	Copper aluminium alloy
TS-1601 TS-1901	14 19	95 95	Copper aluminium alloy

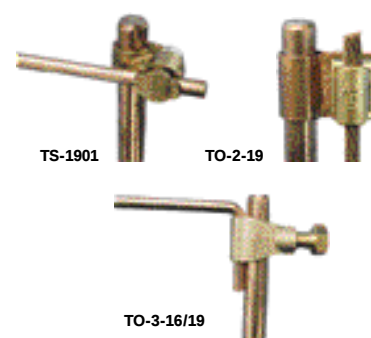

Earth rods



From 1kV to 52kV

Earthing clip

Interconnects to earth every metallic part of installations.

Reference	Conductors section (mm ²)	Capacité de serrage sur tuyaux (Ø mm)
TO-8/32	1 x 2.5 to 2 x 6	8-32
TO-32/100	1 x 2.5 to 2 x 16	32-100

TF-1	Length: 180 mm - Weight: 0.110 kg
------	-----------------------------------



Earth resistance tester

The MX-430-M allows for the measurement of earth resistance and earth specific resistivity and also the spurious voltages caused by grounding parasitic voltage presence.

This equipment is suitable for fast and easy measurement of the grounding resistance in home, industrial buildings, substations,...

- Wide range of measurement from 0.01 Ω to 20 K Ω
- High visibility 3 1/2 digit display with direct readings, even under sunlight
- Supplied with a rechargeable internal battery. A smart charger is microprocessor-controlled and can be powered from the mains by a power plug provided source or from a 12 V car battery.

Technical features

- Application: measurement of grounding resistances (with 3 earth rods), earth resistivity (with 4 earth rods) and spurious voltage presence
- Range of measurement: 0 - 20 Ω ; 0-200 Ω ; 0-2000 Ω and 20 K Ω
- Voltmeter: voltmeter function in AC range as a conventional voltmeter 0-200 V AC
- Operation frequency: 1470 Hz
- Current in and out put power: less than 0,5 W and the out put current is limited to less than 15 mA (peak to peak)
- Operation temperature: -10°C / +50°C
- Storage temperature: -25°C / +65°C
- Humidity: 95% RH (without condemnation)
- Accessories included:
 - Connection wire to supply the charger with a 12 V battery
 - Battery charger 220-240 V
 - Storage bag



MX-430-M	221 x 189 x 99 mm - Weight: 2 kg
----------	----------------------------------

Accessories (measurement kit) MX-433-T

- 1 storage bag
- 4 earth rods copper plated steel
- 1 x 5 meters black cable
- 1 x 40 meters red cable
- 2 x 20 meters cable (1 blue and 1 green)
- 1 x 5 meters green cable to connect to the grounding system
- 1 hammer

MX-433-T	570 x 220 x 160 mm - Weight: 7.7 kg
----------	-------------------------------------



Equipment for working on pole

ARC FLASH HARNESS
PLEASE CONSULT US



CATU™



Above 52kV

52




Equipment guide	108
Personal protective equipment	110
Safety padlocks and warning signs	119
Voltage detectors	123
Short-circuiting and earthing systems	125



APPLICATIONS

Examples of usual applications

Overhead line work from pole

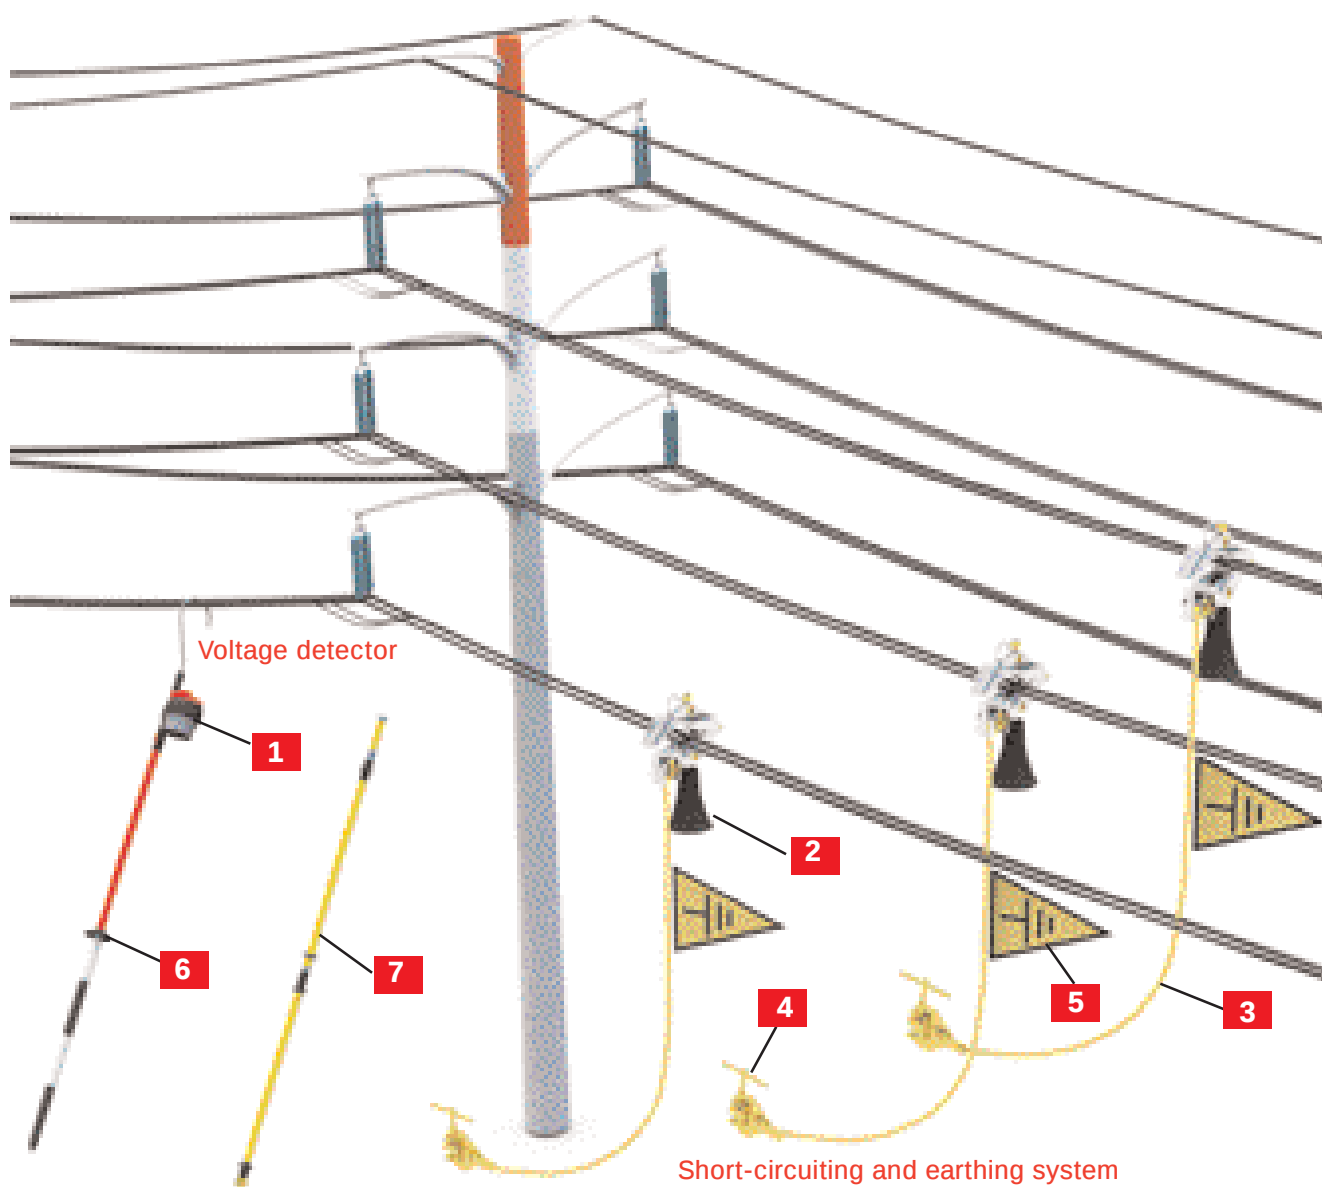

Voltage detectors and phase comparators

- 1** Electronic voltage detectors IEC or standard

References: CC-245 serie

Page: 123

Short-circuiting Systems

- 2** Clamps manœuvrable by insulating sticks

References: MT-730 serie

Page: 125

- 3** Cables (copper)


References: M-24-... serie

Page: 127

APPLICATIONS

Before intervention select the right personal protective equipment

Substation line (work from ground)

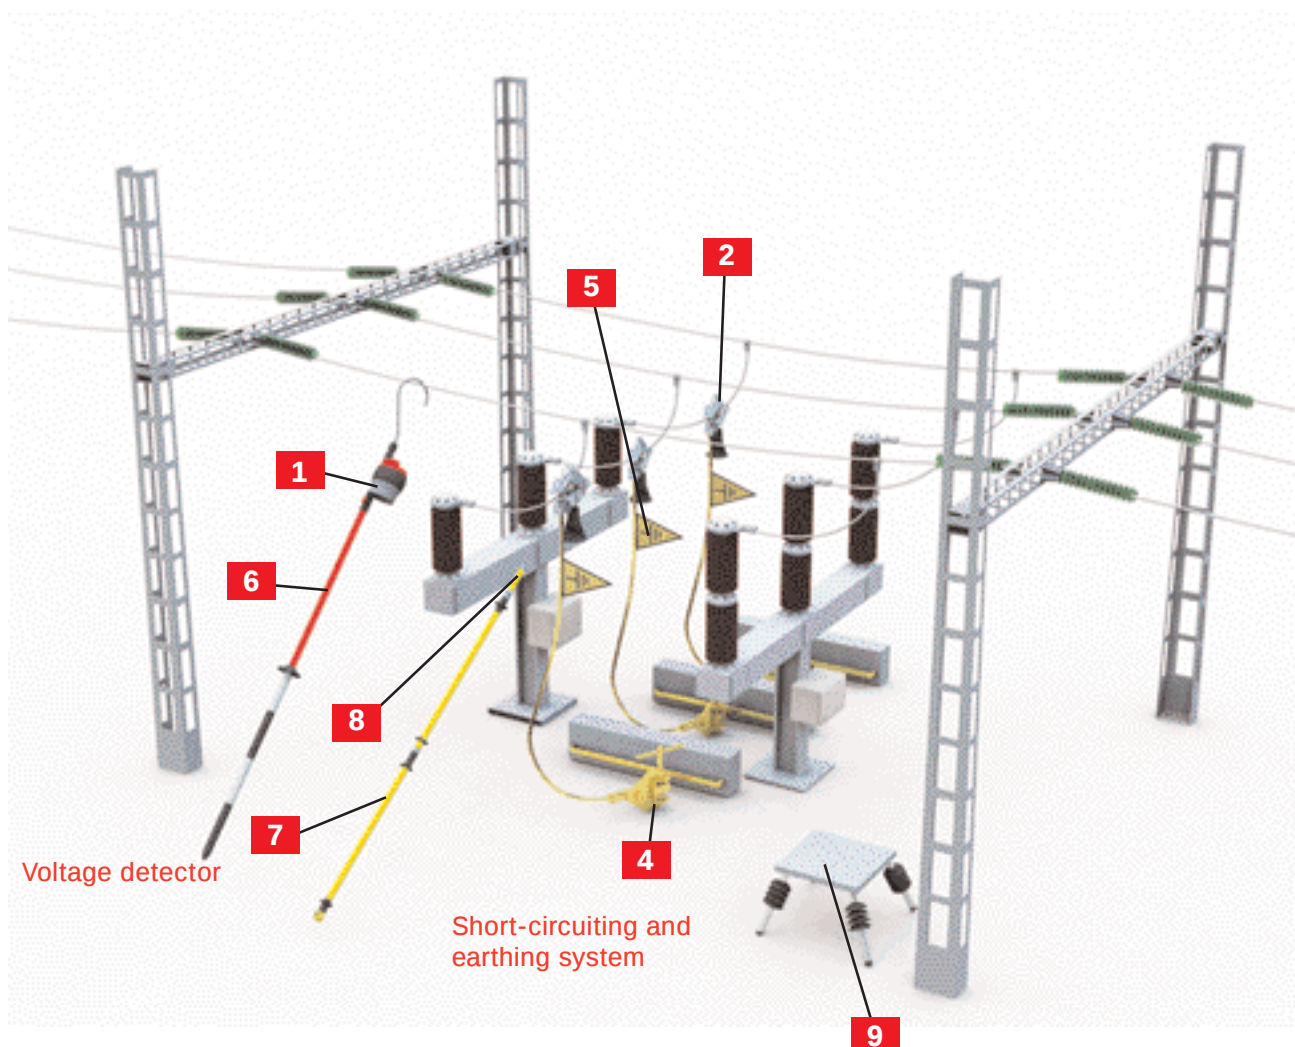

Earth Clamps, rod and flags

4	Earth Clamps	References: MT-847, MT-843	Page: 126
5	Earth Flags	References: AL-58, AL-60	Page: 122

Insulating sticks

6	Insulating Sticks IEC For short-circuiting systems and Voltage detectors	References: CM-4000 serie	Page: 124
7	Insulating sticks for short circuiting and earthing system	References: CM-6 serie	Page: 126
8	Connection adaptors	References: CI-... serie	Page: 125

Insulating platform

9	Insulating platform outdoor use	References: CT-9-63	Page: 114
---	---------------------------------	---------------------	-----------

Personal protective equipment

Head and eyes protection

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Above 52 kV

Safety glasses

Protection against UV radiation and ejections of solid particles. Grilamid frame in orange Softflex. Anti-scratch, anti-impact and anti-chemical product treatments. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.




MO-11000	Clear lenses, delivered in pouch
MO-11001	Tinted lenses, delivered in pouch
MO-11003	Tinted lenses, UV/IR protection, welding filter 2. EN 169. 80°C

Overglasses

Polycarbonate overglasses. Protection against UV radiation and ejections of solid particles. **EN 166/EN 170** **CE**

CAUTION : Do not use for welding operations.

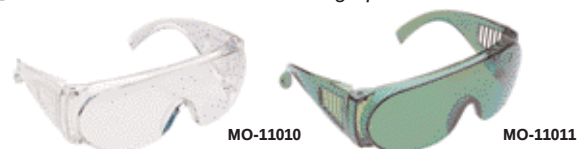

MO-11010	Clear lenses
MO-11011	Green tinted lenses

ABS helmet

Electrically insulating helmets for use on voltage installations. Safety industrial helmet, safety helmet for electrical use, especially designed to maximize wearer's comfort. Standard sizes 53 to 63. Leather trim 21 cm along the inside for added comfort. Multiple adjustments for a perfect fit headband: adjustable in 3 mm increments. Built-in cushion for optimum ventilation. Safety chin strap: fastenings to shell tear resistant. Weight: 0.300 kg.

EN 166/EN 170
EN 50365
ANSI Z89.1:2003
Class E 20 kV **CE**



MO-182/1-B	White
MO-182/1-R	Red
MO-182/1-J	Yellow

Face shield

Protection against electric short-circuits arcs. Face shield adjustable on MO-182 helmet. 100% UV protection. Weight: 0.170 kg.

CAUTION : Do not use for welding operations.



MO-184	Single size, adjustable by rubber band
--------	--

Polycarbonate helmet

Polycarbonate helmet. Shock and wear resisting, comfortable. Adjustable size from 53 to 63 cm. Weight: 0.465 Kg.

EN 397 **CE**



MO-183-BL	White, single size, adjustable
MO-183-RL	Red, single size, adjustable

Face shield

Polycarbonate face shield adjustable on the head by milled wheel. Protection against electric arcs of short-circuits. Anti-mist treatment. Anti-scratch treatment.

EN 166/EN 170 **CE**

CAUTION : Do not use for welding operations.



MO-186	Single size, adjustable
M-881635	Spare face shield for MO-186
M-87384	Bag for face shield and helmet
M-952206	Spare strap for MO-186

Helmet with built-in face shield

Panoramic face shield in non-scratch and anti-mist polycarbonate. Chinstrap (with Velcro fastening) Head fit adjustment by milled wheel. Single size: 0.270 kg.

EN 166/EN 170/EN 397
EN 50365 **CE**



MO-185-BL	White
MO-185-BLM	White, chinstrap with a chin
MO-185-R	Red
MO-185-J	Yellow
MO-185-B	Blue
M-881622	Spare face shield for MO-185
M-881836	Spare white padded headband
M-881889	Spare complete set (harness, chinstrap, headband)

Personal protective equipment

Head and eyes protection		Insulating rubber gloves	Insulating mats and boots	Equipment for working on pole
Above 52 kV				

Headlamp with adjustable focus

Can be carried either on the head or any type of helmet. **CE**
Lighting control and beam by switches.
Range: 30 meters.
Adjustable lamp height angle.
Sealed against rain.
Powered by 4 batteries LR 6.
Autonomy: 6 hours.
Standard bulb 4.8 V/0.3 A.



MS-118	Headlamp - Weight: 0.187 kg
M-95-865	Halogen bulb (sold by set of 5 units) 5.2 V 0.5 A
M-95-864	Hooks set for helmet

LED's headlamp (5 LED's)

LED's Headlamp (5 LED's). **CE**
Can be carried on the head or any kind of helmet.
Lighting by 5 high performance white new generation LED's - 3 lighting levels + 1 flash mode + 1 red lighting. IPX6.
Powered by four batteries LR06 (AA).
Range : 30 meters.
Autonomy : 100 hours.



MS-127	Delivered with batteries and a carrying bag Weight: 226 g
M-95-864	Hooks set for helmet

LED's headlamp (4 LED's)

Can be carried either on the head or any kind of helmet thanks to it supplied adhesive clip. (fig. 1 and 2). **CE**
3 lighting levels: large or narrow for a short or long distance, and both for maximal power.
Flash mode.
4 white LED's lamp with adjustable height angle.
Range: 10 to 15 meters.
Powered by 3 batteries LR03 (AAA).
Autonomy: 90 hours.



MS-122	Delivered with batteries, carrying bag, headband and adhesive clip. Weight: 82g
SUPBAND 122	Adhesive support and headband kit
SUP122	Kit of 5 adhesive supports

Intrinsically safe ATEX LED's Headlamp

Ex II 2GD EEx ia IIC T4 **CE**
Can be carried either on the head or any kind of helmet.
- Lighting by 3 high performance White LEDs.
- 2 lighting levels (High: 3 LEDs on or low: 1 LED on).
- Adjustable lamp height angle.
- Very light, ABS body.
- ATEX certified Categorie 2 (Zone 1)
N° TRL03ATEX21005X.
- Range: 10 to 15 meters.
- Powered by 3 batteries LR03 (AAA).
- Autonomy: 150 hours.
- Strap: cloth or silicone rubber (for helmet).



MS-126	Delivered with batteries - Weight: 0.125Kg
M-95-864	Hooks set for helmet

Personal protective equipment



Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Insulating rubber gloves

Insulating rubber gloves conform to international IEC-60903 standard.

To satisfy the requirements of this standard, they are subjected to dielectrical, mechanical resistance and ageing tests. The acceptance levels for mechanical tests are stricter.

The tests are especially aimed at checking the tensile strength and elongation at break, the mechanical puncture test and tension set.

Our gloves are made of latex especially treated to obtain high dielectric characteristics; they are individually tested and delivered in sealed plastic bags.

IEC-60903

EN 60903



Reference	Class	Voltage (V)	Designation	Overgloves size	Weight (g)
CG-30 (*)	3	26 500	2.9	**	560
CG-40 (*)	4	36 000	3.6	**	800

* References to be completed by size A, B, C, D

** See below

Correspondence with standard sizes: A = 8, B = 9, C = 10, D = 11

SELECTION BOARD SIZE INSULATING GLOVES/OVER GLOVES

Gloves reference	Gloves size	Overgloves reference	Overgloves size
CG-30 (*)	B	CG-99 (*)	C
CG-40 (*)	C		D
	D		E

Undergloves

Cotton undergloves

To be used with insulating rubber gloves.

These washable cotton undergloves improve the use of the insulating gloves.

They bring the best held, hygiene and a greater comfort.



CG-80 (**) ** H: men / F: women

Working gloves

Handling leather and cotton gloves. Docker type. Protection against chemical risks.

EN 388



CG-97-C Single size (C = 10)

Working shoes and electrician suit see page 24

Overgloves

Used as outer gloves to protect insulating gloves in dry environment. Silicon grain leather, very flexible.

Large protective cuff in chrome tanned hide.

Red adhesive strap.

EN 388



CG-99 (*) Weight: 0.170 kg * Add size: C, D, E

Personal protective equipment



Insulating
rubber gloves

Above 52 kV

Head and eyes protection


Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Insulating tester

Tester insulation rubber gloves, manual, head alloy in aluminum alloy and paint steel body. Check holes or cracks in insulating gloves.

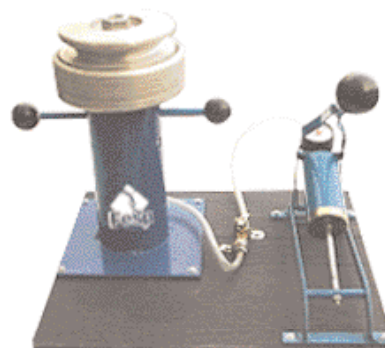

CG-119

Insulating tester

Pneumatic glove tester

For compulsory control of gloves before use.
Checking is done by inflating and immersing in water.




CG-117

140 x 150 x 160 mm - Weight: 0.600 kg

Rubber gloves storage box with window

To be placed in high voltage stations,
or to be carried.
Specially designed for protecting
insulating gloves.
This plastic box also ensures the
protection against UV radiation of
insulating gloves.
The transparent cover enable to
check gloves presence.
Bottle of talc included.
Can be fixed on wall.

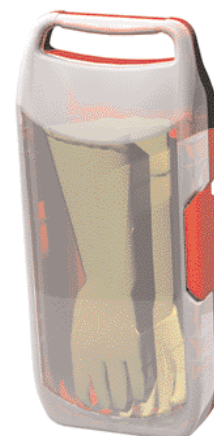

CG-35/2

101 x 224 x 476 mm - Weight: 1.850 kg

Carrying bag

Made from reinforced waterproof fabric for transport of rubber
gloves in vehicles and tool boxes.
Rear loop for belt and snaps.



CG-36

90 x 175 x 585 mm - Weight: 0.120 kg

Nomex undergloves CG-37 and mittens CG-81 see page 22

Personal protective equipment

Insulating mats
and boots

Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Insulating mats

The matting is manufactured of elastomer compounds with slip-resistant surface. High quality dielectrical rubber.



Reference	Thickness (mm)	Dimensions (m)
MP-60/10-5	10	0.6 x 5
MP-60/10-10	10	0.6 x 10
MP-100/10-5	10	1 x 5
MP-100/10-10	10	1 x 10

Insulating platform (indoor model)

Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



Reference	Rated insulation (V)	Height (mm)	Weight (kg)
CT-7-63	63 000	340	3.35

Insulating platform (outdoor model)

Solid plate with moulded insulating material 52 x 52 cm, thickness 40 cm. Feet with rubber tips.



Reference	Rated insulation (V)	Number of skirts per foot	Height (mm)	Weight (kg)
CT-9-63	63 000	4	515	7.00

Rescue sticks

Insulating sticks ended by a large hook in order to rescue quickly an electrified victim in case of accident.



CS-90*	Length: 2.05 m - Rated insulation: 90 kV
CS-225*	Length: 2.45 m - Rated insulation: 225 kV

* Delivered with wall mounted supports.

Personal protective equipment

Equipment for
working on pole

Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Pro electric full body fall arrest harness

2 fall arrest attachment point: dorsal and sternal. Automatic buckles of the belt and leg loops. Elastic shoulder straps. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps.

Tools holders.

3 sizes: S, M, XL. Delivered in a protective bag with a users manual. Weight: 2.7 kg.



EN 358
EN 361
CE

MO-563(*) S = small M = medium XL = large

* add size: S/M/XL

Pro electric full body fall arrest harness

2 fall arrest attachment point: one dorsal point, one sternal point. Easy and fast to wear with a ventral snap-hook. A ventral attachment point for a descender and / or lanyard. Padded leg loops. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable.

Polyamide straps. Tools holders

3 sizes: S, M, XL. Delivered in a protective bag with a users manual. Weight: 3 kg.



EN 358
EN 361
EN 813
CE

MO-565(*) S = small M = medium XL = large

* add size: S/M/XL

Full body fall arrest harness

2 fall arrest attachment point : dorsal and sternal. A work positioning belt, with a comfortable and lightweight pad. 2 buckles of work positioning Belt. Leg loops and shoulder straps adjustable. Polyamide straps. Unique size. Delivered in a protective bag.



EN 358
EN 361
CE

MO-71 Weight: 1.9 kg

Equipped rope straps with lever stretcher

Equipped with adjuster. Hooks to belt with rapid link.




EN 358
CE

MO-52-L Length: 4 m - Weight: 1 kg

Anti-fall grip

The safety block runs freely on its rope but can be automatically locked in case of a sudden downward drop. Must be used only with special 15 mm Ø rope delivered with the device.

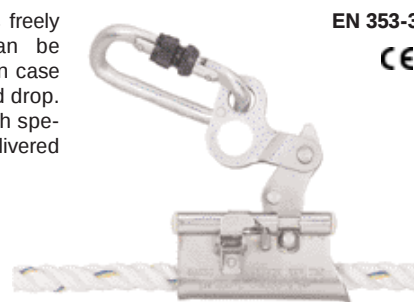

EN 353-3
CE

MO-68/10 With 10 m of rope - Weight: 2.300 kg

MO-68/15 With 15 m of rope - Weight: 3.250 kg

Double safety descent device

Articulated stainless steel cam. Aluminium housing. High-resistance handle. Operates with 9-12 mm diameter lanyard. Ideal for evacuation. Lets you regulate descent.



EN 361
CE

MD-02 Weight: 0.32 Kg

Tether rope with energy absorber

Tether rope in polyamide Ø14 mm.



EN 355
CE

MO-52020 Length: 1.50 m

MO-52021 Length: 2.00 m

Double tether rope with energy absorber

Double tether rope with energy absorber Equipped with 2 steel snap hooks with automatic locking and 1 steel snap hook with screwing locking



EN 355
CE

MO-54010 Length: 1.20 m - Weight: 1.4 kg

Personal protective equipment

Equipment for
working on pole

Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Snap hooks (stainless steel)



MO-54



MO-55/1

EN 362
CE

MO-54 Locks with threaded ring - Opening: 15 mm
100 x 58 mm - 0.154 kg

MO-55/1 Locking by screwing ring on a spring
loaded mobile catch; an additional catch is
provided to prevent the rope from slipping
in the carabiner - 155 x 75 mm - 0.140 kg

Snap hooks (aluminium alloy) zicral



MO-54000



MO-54004

EN 362
CE

MO-54000 Oval snap hook - Opening: 15 mm
Individually tested - Weight: 0.071 kg
110 x 58 mm

MO-54004 D-shaped snap hook with automatic locking
Opening: 23 mm - Individually tested
Weight: 0.087 kg - 120 x 72 mm

Lanyard

Synthetic fibre ropes - 10 mm.
Loops spliced at both ends.
Delivered without snap hook.



EN 354
CE

MO-53 Length: 1.50 m - Weight: 0.125 kg

Fall arrester - retractable type

Designed for lineman safety. Quick
acceleration causes instant locking.
Corrosion protected steel shell.
Integrated braking mechanism and
dissipating element.
Self locking mechanism and auto-
matic tensioning and return facility.
Galvanized cable Ø 4 mm.
Strength: 1 200 daN.
Delivered with a screw crab.
Max. length: 10 m.



EN 360
CE

MO-591002 Weight: 7.00 kg

Snap hook with double safety latch

Opening: 50 mm
Body in steel
Fingers in stainless steel
Resistance: 20 kN.



EN 362
CE

MO-54002 Weight: 0.390 Kg

Tether rope equipped with a tension device

The tether rope is intended to
ensure that operators are held in
position when working at a
height. This tether rope must be
associated with a harness belt.
Ends sewn to form an attachment
and protected with a plastic
girdle.
Polyamide Ø 12 mm.
Light alloy.



EN 358
CE

MO-56009 Weight: 0.75 kg - Length: 2 m

MO-56010 Weight: 1.000 kg - Length: 3 m

Safety rope with wear tell tales

Rope: 14 PEPT multi-filament
(15 mm diam.)
Two-colour safety rope, 100%
polyester made of 3 white
strands with black central
thread (wear telltale).
Buckle: Polyamide central lug
attaches to snap-hook of belt.



EN 354
CE

MO-052 Safety rope only - Length: 4 m - 0.76 kg

Mobile safety line

5 to 20 metres mobile safety
line with adjustable harness.
Easy and quick to set up, this
line can be used by 2 people.
It is equipped with a tension
device.
It has 2 harness rings with screw
gate karabiners, reference 40.
This safety line is designed for
short operations. It takes a few
minutes to set it up on 2
attachment points and can withstand a force of 2,000 kg.
The line is tightened by hand to be taut as possible. The users
can then hook themselves to the safety line using a fall arrest
device or a shock absorbing lanyard. When using a shock absor-
bing lanyard, allow for at least 7 metres clearance.



EN795B
CE

MO-53002 Weight: 2.82 kg

Personal protective equipment



Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Anti fall device with automatic release strap

Winder with self-locking strap.
Length: 2 m.
Equipped with shock absorber.
Allows 2 m of movement autonomy around anchoring point.

EN 360

MO-591000 Weight: 1.160 kg



Constraint tie

Tie in polyamide.

EN 795



MO-52031 Length: 0.8 m - Weight: 0.100 kg

MO-52033 Length: 1.20 m - Weight: 0.135 kg

MO-52034 Length: 1.50 m - Weight: 0.150 kg



Working on pole kit



Reference	Use
KIT-HAUT-01-(*)	To go up a pole with insulating ladders
KIT-HAUT-02-(*)	To go up a pole with spliced ladders
KIT-HAUT-03-(*)	To go up a catenary
KIT-HAUT-04-(*)	To go up on a pylon
KIT-HAUT-05-(*)	To go up on a roof
KIT-HAUT-06-(*)	To go up using a nacelle

Composition	KIT-HAUT-					
	01*	02*	03*	04*	05*	06*
Harness MO-563	n	n	n			
Harness MO-565				n		
Harness MO-71					n	n
Tether rope MO-52020	n					n
Double tether rope MO-54010		n		n	n	
Constraint tie MO-52034	n	n				
Constraint tie MO-52031				n ⁽²⁾		
Tether rope with tension device MO-56009	n	n	n	n	n	
Anti-fall grip MO-68/15	n	n	n	n		
Snap hook MO-54	n	n				
Carrying bag M-87-295	n	n	n	n	n	n

(*) add size : M or XL - order example : KIT-HAUT-02-XL.

Personal protective equipment

Equipment for
working on pole

Above 52 kV

Head and eyes protection

Insulating rubber gloves

Insulating mats and boots

Equipment for working on pole

Insulating ladders

A complete range with top quality features: Insulation between two steps: 30000 V (test performed after immersion in water for 24 hours). High mechanical resistance to bending and twisting. Good resistance/weight ratio. High fire resistance. High resistance against bad weather and corrosive elements. Lateral risers in polyester/glass fiber rectangular section 70 x 25 mm. Aluminium alloy rungs with square 29 x 29 mm section and anti-slip coating.



EN 131
CE

INSULATING 2 SECTION EXTENSION LADDERS,
HAND OPERATED

Reference	Folded length	Extended length	Number of rungs	Weight (kg)
MP-514/2	2.41 (m)	4.09 (m)	2 x 8	13.9
MP-515/2-R	2.97 (m)	5.21 (m)	2 x 10	17

INSULATING 2 SECTION EXTENSION LADDERS,
ROPE AND PULLEY OPERATED

MP-506/2	3.53 (m)	6.05 (m)	2 x 12	20
MP-508/2	4.66 (m)	8.30 (m)	2 x 16	31
MP-510/2	5.78 (m)	10.26 (m)	2 x 20	38



Protection against electrical shock
and flash hazards

Arc Flash kits



See page 68

CATU™

Safety padlocks and warning signs

Padlocks

Above 52 kV

Padlocks

Warning signs


Delineators

A wide range of brass padlocks, in a plastic body.

Brass ring bow 50 or 70 mm. Diameter of the ring bow 4 or 6 mm. Different n° of keys. Colours : red, white, yellow, blue or green.

Padlocks with warning signs

Reference	Ring bow (mm)	Ø (mm)	Weight (kg)
AL-230-(*)-EX	50	6	0.170
AL-230-S-(*)-EX	70	6	0.190
AL-230-Z-EX	50	6	0.170
AL-230-S-Z-EX	70	6	0.190
AL-240-(*)-EX	50	4	0.170
AL-240-S-(*)-EX	70	4	0.190
AL-240-Z-EX	50	4	0.170
AL-240-S-Z-EX	70	4	0.190



* Add n° of key: 111 or 222

"00" n° standard key: n° of key upon request. Z: random n° of key

Colour padlocks range

Reference	Ring bow (mm)	colour	Ø (mm)	Weight (kg)
AL-240-B-Z-EX	50	White	4	0.170
AL-240-B-00-EX	50	White	4	0.170
AL-240-S-B-00-EX	70	White	4	0.190
AL-240-J-Z-EX	50	Yellow	4	0.170
AL-240-J-00-EX	50	Yellow	4	0.170
AL-240-S-J-00-EX	70	Yellow	4	0.190
AL-240-BL-Z-EX	50	Blue	4	0.170
AL-240-BL-00-EX	50	Blue	4	0.170
AL-240-S-BL-00-EX	70	Blue	4	0.190
AL-240-V-Z-EX	50	Green	4	0.170
AL-240-V-00-EX	50	Green	4	0.170
AL-240-S-V-00-EX	70	Green	4	0.190



HIGH VOLTAGE

Safety padlocks and warning signs

Padlocks

Above 52 kV


Padlocks

Warning signs

Delineators

Multiple locking apparatus

Holds up to four padlocks and a sign.

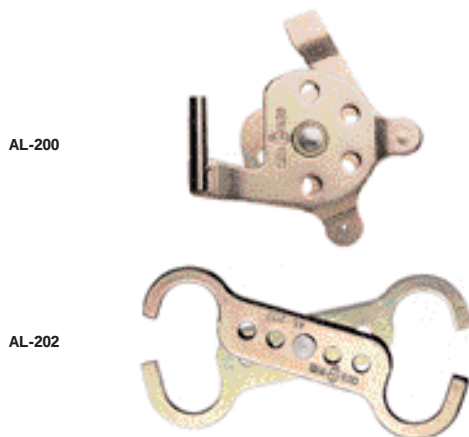

AL-200	100 x 60 x 10 mm - Weight: 0.150 kg
AL-202	165 x 50 x 12 mm - Weight: 0.200 kg

Handle for 10 and 30 padlocks

PVC.
Shock resistant.
Ivory colour.
With holes Ø 9 mm.



AL-207/10	For 10 padlocks - Weight: 0.06 kg
AL-207/30	For 30 padlocks - Weight: 0.130 kg

Safety locking badge

Fit with multiple locking apparatus AL-202
White letters on red aluminium
Fixing with 1 hole Ø 10 mm.



AM-467-GB	Ø 80 mm
-----------	---------


Handle with 6 padlocks

Handle of moulded plastic for holding up to six padlocks.
Compartment with transparent cover for key storage.



Marking

For indelible writing on the warning signs and padlocks, our ALU-SCRIPT™ markers are ideal.

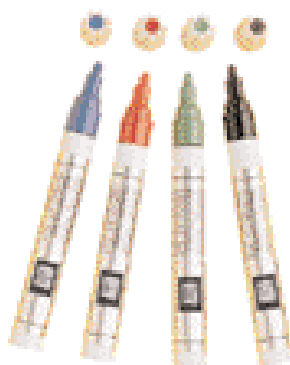

AS-404	4 markers in assorted colours (red, black, blue and green)
--------	--

Reference	Weight (kg)	Handle with 6 padlocks
AL-236-111-EX	1.150	AL-230-111-EX
AL-236-S-111-EX	1.210	AL-230-S-111-EX
AL-236-222-EX	1.150	AL-230-222-EX
AL-236-S-222-EX	1.210	AL-230-S-222-EX

Safety padlocks and warning signs

Warning signs

Above 52 kV

Padlocks

Warning signs

Delineators

Substation signs

WARNING SIGNS

Reference	Type	Dimensions	Characteristics
AM-41/1*	aluminium	100 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-41/2	aluminium	200 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-49/1*	aluminium	100 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-49/2	aluminium	200 mm side	black on yellow fixing: 3 holes Ø 4.5 mm
AM-344-GB	aluminium	100 mm side	black letters on yellow fixing: 3 holes Ø 4.5 mm
AM-345-GB	aluminium	100 mm side	black letters fixing: 3 holes Ø 4.5 mm
AM-344/05	aluminium	50 mm side	
AM-344	aluminium	100 mm side	

*Pack of 10 units.

SPECIALIZED SIGNS

Reference	Type	Dimensions	Characteristics
AM-20-GB	aluminium	350 x 250 mm	blue letters on plain aluminium
AM-20-RM	aluminium	350 x 500 mm	blue letters on plain aluminium
AM-61-GB	aluminium	150 x 200 mm	
AM-61-RM	aluminium	150 x 200 mm	
AM-215-RM	aluminium	350 x 250 mm	black on yellow SF6 warning
AM-282/2-RM	aluminium	200 x 60 mm	
AM-7002	aluminium	300 x 200 mm	black on yellow
AM-33/3	aluminium	Ø 300 mm	red-black on alu
AM-34/2	aluminium	Ø 200 mm	red-black on alu
AM-32/3	aluminium	Ø 300 mm	
AP-510-GB	plastic	420 x 297 mm	golden rules
AP-951/2	plastic	200 x 200 mm	red on white



AM-41/1



AM-49/1



AM-344/05 - AM-344



AM-344-GB



AM-345-GB




AM-20-GB



AM-20-RM



AP-510-GB



AM-215-RM



AM-282/2-RM



AM-7002



AM-61-GB



AM-61-RM



AP-951/2



AM-33/3



AM-34/2



AM-32/3

For other models, please consult us.

Safety padlocks and warning signs/Voltage detectors

Warning signs

Delineators

HF Voltage
comparator

Above 52 kV

Padlocks

Warning signs

Delineators

Warning sign

Attachment: one hole Ø 10 mm.
Marking for indelible writing: see page 120.



Reference	Type	Ø (mm)
AP-499/1	plastic	100

Warning flags

Brightly colored ribbon.



Reference	Dimensions (mm)	Fixing
AL-53	650 x 350	on handle

Grounding flags



AL-60



AL-58

AL-58	Fixing on handle; for work site
AL-60	Fixing on earthing cable; for immediate identification in open-type switchgears possible inscription: 0 to 99 (by using ALU-SCRIPT markers)

Safety boundary post

For temporary installation.
Used with tough link chain delineators (AL-32/05).
Removal Foot.
Ø 50 mm.
Height: 0.9 m.



AL-316

AL-318

AL-316	Red and white - Weight: 4.2 kg
AL-318	Black and yellow - Weight: 4.2 kg

Chain delineators

Polyamide chains.



AL-31/25

AL-32/05

AL-31/25	Red and white - Length: 25 m
AL-31/05	Red and white - Length: 5 m
AL-32/05	Black and yellow - Length: 5 m
AL-31	Opening ring for AL-31/25

Delineators

Brightly colored ribbon.
Snap hook on one ribbon end and another on spool.
A ring on spool brakes ribbon at desired length.
wide: 50 mm
length: 20 m.



AL-62-A

AL-63-A

AL-62-A	Red ribbon
AL-63-A	Yellow ribbon

Wireless phase comparator

The wireless phase comparator allow to check if the 2 actives conductors' voltage are in phase or not. On electrical networks 50/60Hz from 1kV to 232kV. Distances between both points of measurement until 80m in open field. Wireless and without maximum time measurement. Transmitter, receiver and good radio link between both devices autotest. IEC 61481 (phase comparator). Sound and luminous indication. Green diodes: synchronization (angular difference lower +/-10 %). Red diodes: no synchronization (angular difference superior +/-30 %). Communication frequency 433 MHz. Battery 9V.

Reference	Voltage (kV)	Length of antenna (m)	Weight (kg)
CL-12	1-232	0.6	1.750



transmitter

receiver

Voltage detectors

Designed to give users maximum safety, the DETEX detectors of the CC-245 Series are the result of the most modern developments in electronic research. They offer a number of important properties and advantages.

Double signalling

Voltage presence indicated at the same time by:

- 4 extremely bright red flashing electro-luminescent diodes (visible at more than 50 meters even in direct lighting),
- a powerful rated acoustic signal (60 dB/2 m).

Checking

Satisfactory operation of the unit is indicated:

- When pressing the test button, by:

- the red diodes flashing,
- the acoustic signal sounding.

- When releasing the TEST button, by:

- timed green up diodes lighting.

As long as they light, the unit continues its self-testing and the detector is fully operational.

High specifications

- Detectors are adjusted, tested and controlled one by one.
- Remarkably resistant to impacts, vibrations, extreme temperatures, humidity and sudden changes in the atmosphere (condensation, freezing).

- Precise and stable operating threshold.
- Insensitivity to induced voltages by limiting the operating voltage range.
- Robust housing made from polycarbonate with high mechanical properties and dielectric strength.
- The contact electrodes are simply screwed to the housing and are therefore easily interchangeable.

IEC-61243-1



Power supply

- One 9 V battery type 6 LR 61.

End fittings:

- "C" for hexagonal sticks.
- "K" for universal sticks.


Weight

650 g (with battery).

Packaging

Units supplied complete with battery and electrode in a rigid synthetic case with handle.

- Recommended sticks: CM-4000 serie. See page 124.

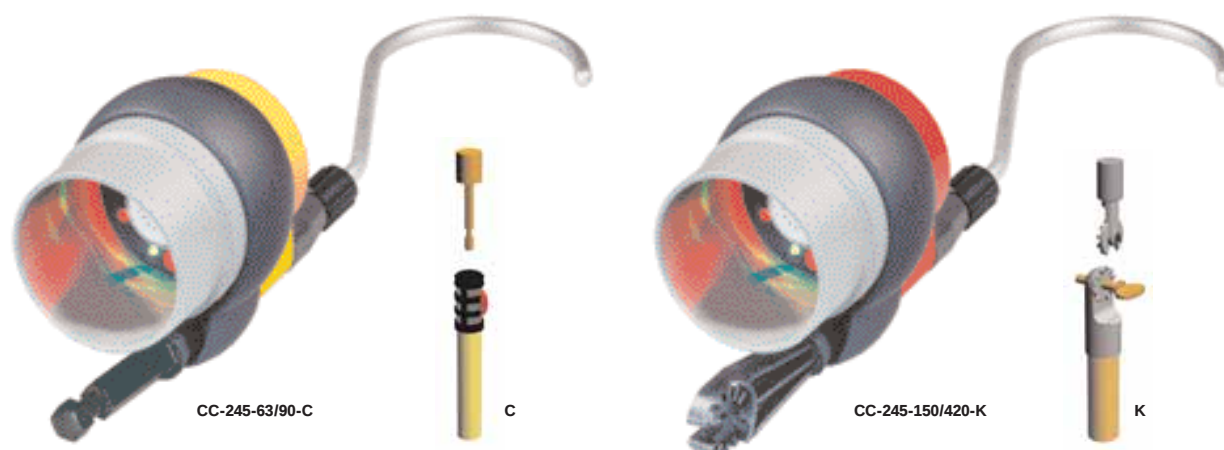

Reference	Operating voltage (Ph/Ph-kV)	Contact electrode Ø mm	Body colour	Freq. (Hz)
FRENCH STANDARD NETWORKS				
CC-245-63/90...*	63-90	120	Yellow	50
CC-245-225/420...*	225-420	200	Red	50
British standard networks				
CC-245-66/132-K	66-132	200	Red	50
Other models				
CC-245-60/150-K	60-150	120	Red	50
CC-245-63/150-K	63-150	120	Red	50
CC-245-90/225-K	90-225	120	Red	50
CC-245-150/420-K	150-420	200	Red	50
CC-245-225/550-K	225-550	200	Red	50

* Please specify type of mounting when ordering: C or K.

For other voltages, or 60 Hz Frequency detectors (CC-246 Serie) please consult us.

Voltage detectors

Insulating sticks

Above 52 kV

Voltage detectors

Insulating sticks

Insulating sticks for short-circuiting and earthing systems

These 39 mm dia. elements are assembled using a new safety bayonet system connector in aluminium alloy. They allow construction of a large variety of custom made sticks that meet the most varied conditions of application. Calibrated lengths of 1 to 3 meters (with fraction of 0.50 m) permit a huge number of applications.

This range thus allows a stick-length limitation in case of space requirements and carrying capabilities.

IEC-60855 

For common applications a serie of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.

Reference	Complete stick length (m)*	Complete stick length (m)**	Insulating length (m)	Weight (kg)
Basic elements				
CM-4610	1.13		0.08	1.35
CM-4615	1.63		0.33	1.80
CM-4620	2.13		0.33	2.80
CM-4625	2.63		0.83	3.30
Intermediate elements				
CM-4610-I	1.165		0.8	1.30
CM-4615-I	1.665		1.3	1.70
CM-4620-I	2.165		1.8	2.60
CM-4625-I	2.665		2.3	3.10
Terminal elements				
CM-4610-*	1.115	1.21	0.78	1.00
CM-4615-*	1.615	1.71	1.28	1.40
CM-4620-*	2.115	2.21	1.78	2.20
CM-4625-*	2.615	2.71	2.28	2.70
Fixed lenght sticks				
CM-4115-*	1.575	1.675	0.82	1.35
CM-4120-*	2.075	2.175	1.07	1.80
CM-4125-*	2.575	2.675	1.32	2.80
CM-4130-*	3.075	3.175	1.82	3.30
Intermediate elements with rain skirts				
CM-3900-J	0.36			0.95

* Add end piece C, K, E.

• With the smallest end fitting.
•• With the biggest end fitting.


Set of sticks

Complete sets of sticks for standard applications. IEC-60855 

Reference	Working distance (m)	Composition
CM-4220*	2	2 elements: CM-4610+CM-4610-*
CM-4230*	3	2 elements: CM-4615+CM-4615-*
CM-4240*	4	2 elements: CM-4620+CM-4620-*
CM-4345*	4.5	3 elements: CM-4615+CM-4615-I+CM-4615-*
CM-4360*	6	3 elements: CM-4620+CM-4620-I+CM-4620-*

* Add end piece C, K, E.

For cables < 95 mm² CM-4000 serie is recommended.

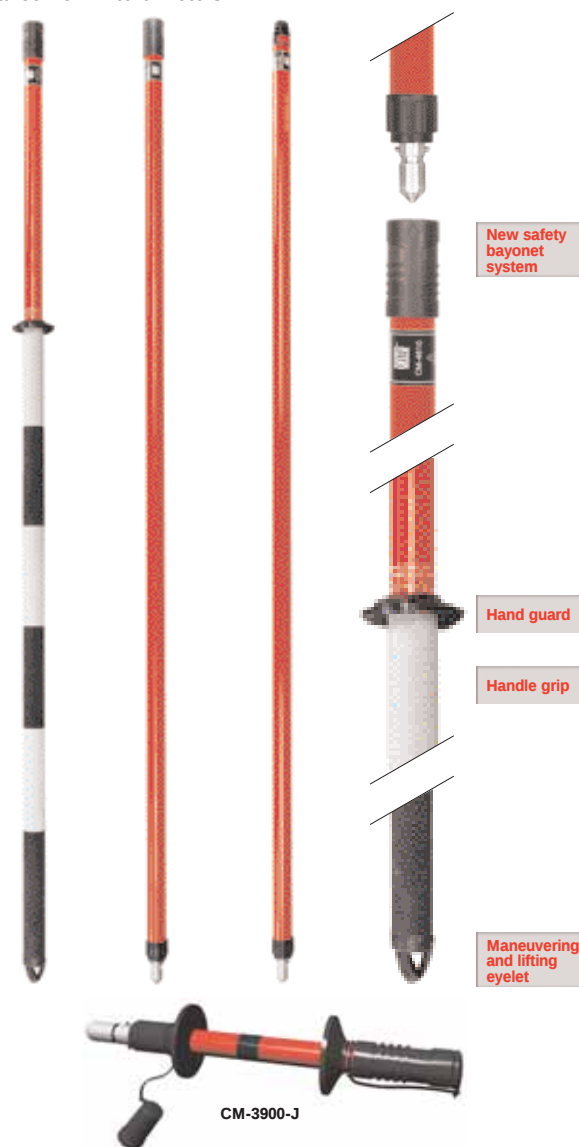

Carrying and storage stick case

Case especially designed for Ø 39 mm new range sticks. Carrying capacity: 3 elements.



CM-3000

480 x 330 x 120 mm - Weight: 1.2 kg

Short-circuiting and earthing systems

Clamps

Insulating sticks and earth clamps

Fixed points and cables

Accessories

Above 52 kV

HV and EHV clamps manoeuvrable by insulating stick

Body in aluminium alloy with trapezoidal threaded screw. Interposed elastic washers in the clamping system improve efficiency and insure a higher withstand in case of electrodynamic shock. Manoeuvring by CM-6 insulated stick of appropriate length and characteristics.


MT-731


MT-732


MT-734
IEC-61230


MT-735
IEC-61230


MT-737-H
IEC-61230


MT-732-A
MT-731-A


MT-732-B
MT-731-B


MT-732-E
MT-731-E


MT-732-H
MT-731-H


MT-734
MT-735


MT-734-A
MT-735-A


MT-734-B
MT-735-B



MT-734-E
MT-735-E



MT-734-H
MT-735-H

Reference	Clamping capacity (Ø mm)	Test current (kA/1s)	Copper connection			Weight (Kg)	Dimensions (mm) h x L x thickness
			Copper cables (mm² max.)	Contact range width (mm)	Stud or hole		
MT-731*	5-60	40	150	45	M 12	1.45	200 x 200 x 50
MT-732*	40-120	40	150	45	M 12	1.45	200 x 200 x 50
MT-734*	5-40	40	150	40	M 12	0.8	145 x 125 x 52
MT-735*	15-60	40	150	40	M 12	0.8	195 x 135 x 45
MT-737*	20-120	40	150	40	M 12	1.35	340 x 200 x 55

* Add type of connection A - B - E - H.

Attachment of MT-734/MT-735 clamps with MT-717-3-B hook.

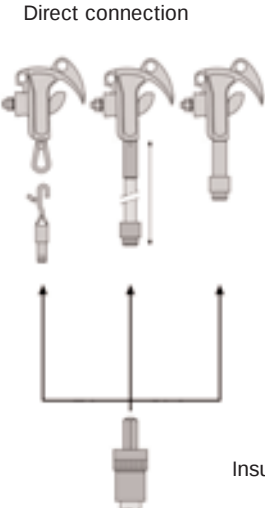
Direct connection

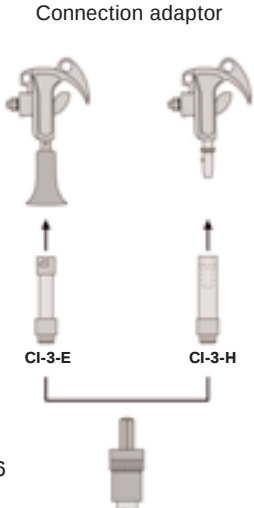
Connection adaptor
CI-3-E CI-3-H



Insulated sticks CM-6
see page 126.

Short-circuiting and earthing systems



Above 52 kV

Clamps

Insulating sticks and earth clamps

Fixed points and cables

Accessories

Insulating sticks for short circuiting and earthing systems

- 46 mm dia. single type elements, yellow colour, with superior characteristics, they are connected between them without any prior order of assembly.
- These elements allow "long length" assemblies which can support short-circuit systems with large cross-section cables.
- Shockproof guard and pole end cap.

Reference	Length (mm)	Weight (Kg)
CM-6-15	1.5	2.40
CM-6-20	2.0	3.20
CM-6-25	2.5	4.00
CM-6-30	3.0	4.80




For cables $\geq 95 \text{ mm}^2$ CM-6 series is recommended.

Earth clamps


Copper aluminium bronze earth clamps.




MT-843



MT-847



MT-852



MT-853

Reference	Test current	Dimension (mm) Weight (kg)	Connection	Clamping capacity (mm)
MT-843	40 kA/1 s	45 x 106 x 165 0.95	hole: Ø 13 mm	● Ø 6-35 ■ 0-35
MT-847	30 kA/0.5 s	45 x 106 x 170 1.00	hole: Ø 13 mm	■ 0-25
MT-852	40 kA/1 s	70 x 125 x 155 1.40	hole: Ø 13 mm	Fixed points
MT-853	40 kA/1 s	65 x 130 x 135 1.00	hole: Ø 13 mm	Fixed points

Short-circuiting and earthing systems



Above 52 kV

Clamps

Insulating sticks and earth clamps

Fixed points and cables

Accessories

Adjustable fixed points

For large vertical or oblique heavy duty conductors.

Reference	Rating insulation (kA/1s)	Weight (kg)	Dimensions L x W x T (mm)	Conductors		Description
				Type	Ø (mm)	
MT-790	30	1.400	255 x 105 x 50	copper	12-60	arm Ø 18 mm
MT-792	30	0.855	270 x 105 x 60	aluminium	12-60	arm Ø 20 mm
MT-797	20	1.200	240 x 170 x 60	aluminium	60-120	arm Ø 20 mm



Copper and aluminium cables

Copper cables

Extra flexible braided multi-strand cables.

A Transparent PVC sheath, with cable section identification.

B Transparent silicon sheath according to IEC-61230. Resistant to temperature variations (-40 °C to +70 °C) with double IEC triangle marked on cable section.

IEC-61481



Aluminium cables

Extra flexible braided multi-strand cables.

Transparent PVC sheath, with cable section identification.



A	B	Rating (kA/1s)	Cable		Section (mm²)
			Weight (kg/m)	Ø (mm)	
M-24-70	M-24-70-S	16	0.768	12	70
M-24-75		20	0.800	12	75
M-24-95	M-24-95-S	20	1.000	14	95
M-24-120	M-24-120-S	30	1.280	17	120
M-24-150	M-24-150-S	36	1.630	19	150

Reference	Rating (kA/1s)	Cable		Section (mm²)
		Weight (kg/m)	Ø (mm)	
M-28-70	10.0	0.240	13.4	70
M-28-120	17.5	0.430	19.00	120
M-28-150	20.0	0.510	21.00	150

Earthing kit support

Welded steel assembly with galvanization surface treatment. Writing zone available.



MT-895

230 x 230 x 150 mm - Weight: 0.9 kg

Jumper cables realisation specially manufactured items



Quotations in accordance with faisability.

For all details:

Tel.: 33 1 42 31 46 24 / www.catuelec.com

HIGH VOLTAGE

Short-circuiting and earthing systems

Accessories

Above 52 kV

Clamps

Insulating sticks and earth clamps

Fixed points and cables

Accessories

Rope operated clamp

Description

V-shaped aluminium body.

Spring operated swinging jaw with pre-set.

Operation

Attachment and removal is carried out from the ground or from the cross-arm, using a rope passed previously over the conductor to be earthed.

- Attachment: the clamp is pulled up by the rope. Pulling on the rope triggers the spring and closes the jaw.
- Removal: pulling on the rope attached to the hinged saddles causes the clamp to pivot and free the jaw.

For conductors reached from the ground:

- up to 10 m: by using MT-709-B reel launcher placed on a CM-6 SERIE Stick (see page 96) that passes the rope over the conductor;
- up to 20 m: by using a MF-60 wire projector. This projector fires an arrow carrying a braided nylon wire which sets the rope. The clamp is then fixed to the rope and attached onto the conductor.
- Earthing cable with ranger (mm²): 2 x 120.
- Cable connection crimped log hole: M 12.



Reference	Clamping capacity (Ø mm)	Rating insulation (kA/1s)	I asymmetrical (A)	Dimensions (mm) h x L x thickness	Weight (Kg)
MT-701/1	12-48	30	72	195 x 120 x 175	2.00

Cable-launcher projector

Used to fire the insulating rope for setting the MT-701/1 clamp, this wire-projector may also be used for checking the absence of voltage from the ground by throwing a very light fuse wire over the conductor (in case of voltage, arcing will occur to warn the operator).



MF-60	Wire-projector
MF-61	Spare arrow
MF-62	Spool of 30 m of fuse wire
MF-63	Spool of 100 m of fuse wire
MF-66	Spool of 30 m of nylon lead

Reel launcher and insulated rope reel

This device contains a shaft on which the rope reel is engaged, and a spring system which triggers ejection of the reel when it comes in contact with the conductor. To be fixed on a MAJOR SERIE Stick, depending on the height of the conductor to be reached.



MT-709-B

MT-708-40

MT-709-B	Aluminium alloy launcher - Weight: 0.310 kg
MT-708/40	Special quality nylon on shock proof reels; equipped with 2 snaps. Rope Ø 6 mm - Length: 40 mm

Short-circuiting and earthing systems carrying bags

Strong water proof canvas. Reinforced bottom.



M-87-295

M-87-53

M-87-53	380 x 250 - Height: 400 mm - Weight: 2 kg
M-87-153	380 x 250 - Height: 600 mm - Weight: 2.5 kg
M-87-295	550 x 300 x 300 mm - Weight: 2 kg

Specification for short-circuiting and earthing systems



A Network, electrical installation character-

Network voltage: _____ kV

Max. short-circuiting current (1s): _____ kA

Nature of the conductive materials: Basis Al ☐ Basis Cu ☐

Overhead lines ☐

- Dia. or section of the conductors: min. _____
max. _____

Switchboard or substation ☐

- Round bars dia. (mm): mini. _____ maxi. _____
Length = _____
- Flat bars
 - H type ☐ Thickness = _____
 - V type ☐ Length = _____
Thickness = _____
- Fitting on edge face ☐ Fitting on side face ☐

B Characteristics of the earthing system

- Selected sketch (out of the three standard types shown below)
- Distance between live conductors (m): _____, between live conductors and grounding point (m) _____
- To place the clamps in position, the operator will stand: above the conductors ☐ under the conductors ☐
at the conductors level ☐
- For cable sections, please indicate max. ΔT or min. dia. of the conductor _____

C Earthing connection point

- Earth rods: dia. or thickness on side face (mm): _____ Flat bar, angle-bar, thickness (mm): _____
- Round conductor dia. (mm): _____

D Operating stick

- Insulating stick: total length _____ Fixed ☐ Connectable stick ☐ Telescopic ☐

Characteristics

- Selected connection type: Sketch n° _____
- Contact clamps (type MT- _____)
- Short-circuiting cable
 - Length (m) _____
 - Dia. or section (mm, mm²) _____
- Grounding cable
 - Length (m) _____
 - Dia. or section (mm, mm²) _____
- Connection of cables on clamps, earth clamps, trifurcation
 - Direct connection by screw and nut ☐
 - Connection by means of crimped lugs ☐
- Earth clamp, type _____
- Presence of a reel _____
- Insulating stick, type _____


Sketch N°1



Sketch N°2



Sketch N°3



Accessories

- Carrying bag for sticks ☐
- Canvas bag for equipment ☐
- Carrying case for equipment ☐
- Cable reel ☐

Railways

Electrical safety equipment



CATU™



The characteristics and technical informations stated in our literature are only for your guidance and therefore cannot be considered as contractual.

Our company is entitled to modify at any time the characteristics of its equipments.
In case of modification of these characteristics, our company would not be obliged to supply materials conform to those previously in force.

“Alu-Metal, Alu-Script, Catu, Catex, Catohm, Clipblock, Detex, Detex-Lumifix, Isomil, Lowlock, Major, Normafix, Normagrif, Pelican 2, Piezo-Test, Pointest, Snaplock, Triplex” are trade marks of Catu S.A.

Non contractual photographs



© 2009 CATU S.A. BAGNEUX

All reproduction, adaptation and translation rights reserved for all countries.

GENERAL CATALOGUE RG-10

COMST



DISTRIBUTED BY:



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582