



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK

Betaduct - Narrow Slot Design

nominal size	external dimensions		part no. selection				carton quantity	
W x H (mm)	width (mm)	height (mm)	grey RAL 7030PVC	white PVC	black PVC	blue PVC	no. of lengths 2m each	total metres
19 x 50	25	53	10470018	23630110	10490018	-	12	24
25 x 37.5	29	41	10470022	23630400	10490022	-	12	24
	29	54	10470023	23630500	10490023	-	12	24
	29	79	10470024	23630600	10490024	-	8	16
	30	105	10470025	23630700	10490025	-	8	16
37.5 x 37.5	41	41	10470032	23630900	10490032	-	12	24
	41	54	10470033	23631000	10490033	-	8	16
	41	79	10470034	23631100	10490034	-	8	16
	43	105	10470035	23631200	10490035	-	8	16
50 x 37.5	56	41	10470052	23631400	10490052	-	8	16
	54	54	10470053	23631500	10490053	-	8	16
	55	79	10470054	23631600	10490054	-	8	16
	56	105	10470055	23631700	10490055	-	4	8
75 x 37.5	80	40	10470072	23631800	10490072	-	8	16
	78	54	10470073	23631900	10490073	-	8	16
	80	80	10470074	23632000	10490074	-	8	16
	80	105	10470075	23632100	10490075	-	4	8
100 x 50	107	54	10470103	23632400	10490103	-	4	8
	107	80	10470104	23632500	10490104	-	4	8
	107	104	10470105	23632600	10490105	-	4	8

KEY INFORMATION

MATERIALS

Self extinguishing PVC

SERVICE TEMPERATURE

-15°C to +60°C (+5°F to +140°F)

STANDARDS

Base slots to DIN 43659


FLAMMABILITY

UL94 V-0 rated material

APPROVALS

UL & Lloyds Register

RoHS compliant

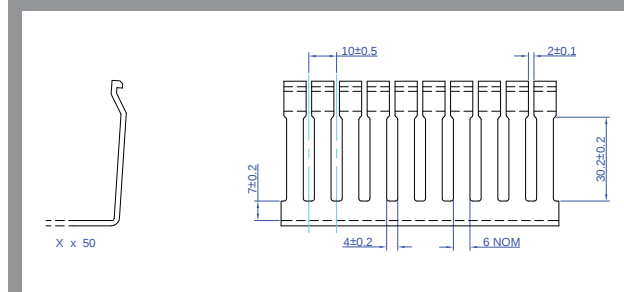

TECHNICAL INFORMATION

- Ideal for use with slimmer terminal blocks where more access is required
- Improves appearance of panels with cables out in best position
- 10mm slot pitch
- 4mm slot width
- 18 sizes available in grey, white or black
- UL and Lloyds Register approved
- RoHS compliant

Other sizes may be available upon request, please contact the sales office for minimum quantities and lead times.

These are non-stock items and may require minimum order quantities. Please contact our sales office for availability and price.

The use of Betaduct Rivets is strongly recommended for the installation of all types of Betaduct