



Premium cable ties with steel locking barb Blind mounting cable ties

- Suitable for hard-to-reach areas
- Fast hidden mounting on walls and vehicle chassis
- Twist off the locking head
- Pull the tie end through the fastening hole
- Place locking head on tie end
- Pull tight and cut off excess
- In the locked state, the locking head neatly covers the mounting hole

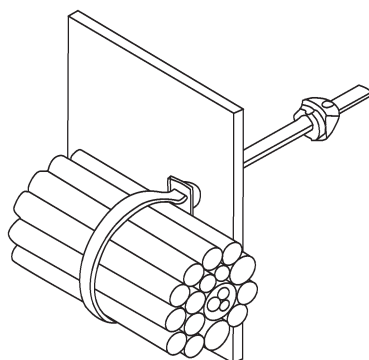

Technical Information

Material - Moulding	Polyamide 6.6
Material - Locking barb	316 grade stainless steel
Temperature range	-40°C to +85°C
Colour	Natural or UV-resistant black (see table)
Flammability rating	UL 94 V-2
Other properties	UV-resistant (black), Halogen free Silicone free

Approvals



E49405

Ordering Information




PRODUCT REF.	COLOUR	DIAMETER OF MOUNTING HOLE [mm]	LENGTH L [mm]	WIDTH W [mm]	THICKNESS [mm]	BUNDLE DIAMETER FROM ... TO [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
TYG34M	natural	6.4 - 7.0	160	3.6	1.1	2 - 32	180	1000	ERG299
TYG534M	natural	6.4 - 7.0	160	3.6	1.1	2 - 32	180	100	WT193A
TYG34MX	UV-resistant black	6.4 - 7.0	160	3.6	1.1	2 - 32	180	1000	TR227
TYG534MX	UV-resistant black	6.4 - 7.0	160	3.6	1.1	2 - 32	180	100	

For tooling specifications see pages 104 to 111



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

- Suitable for hard-to-reach areas
- Fast hidden mounting on walls and vehicle chassis
- Ideal for mounting on vehicle chassis. Can still be released before final tensioning
- In the locked state, the locking head neatly covers the mounting hole

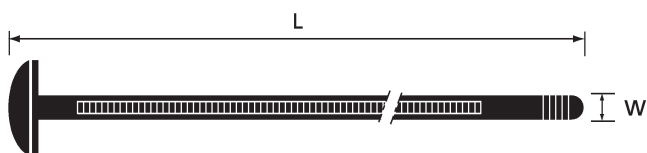

Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	UV-resistant black
Flammability rating	UL 94 V-2
Other properties	UV-resistant, Halogen free, Silicone free

Ordering Information

PRODUCT REF.	DIAMETER OF MOUNTING HOLE [mm]	LENGTH L [mm]	WIDTH W [mm]	THICKNESS [mm]	BUNDLE DIAMETER FROM ... TO [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
TY41M	8.1 - 17.3	244	5.7	1.7	5 - 60	300	500	ERG297

For tooling specifications, see pages 104 to 111



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK