


Cable Sheath Cutting Pliers


- ▶ Longitudinal and circular cuts
- ▶ Used to work on live parts up to 1000V AC and 1500V DC
- ▶ Designed to strip both ends and midspan
- ▶ Hooked blade for removing the sheath that has been cut
- ▶ 100° tool rotation makes a complete 360° circumference cut
- ▶ Longitudinal feed in both directions using the ratchet lever
- ▶ Electrically insulated interchangeable blades
- ▶ Two-component handles in compliance with IEC/EN60900 Standards
- ▶ The tool head (except for the blades) is totally protected by insulation against accidental contact
- ▶ Application range: Ø 16 - 54mm
- ▶ Insulation thickness: 0.5 - 5mm
- ▶ Suggested application: High density polyethylene

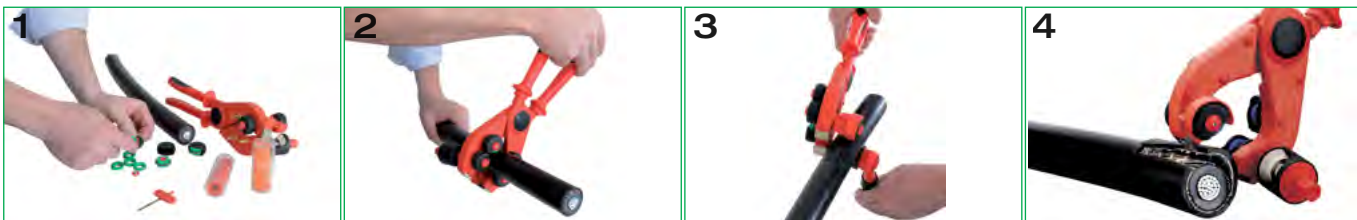

Part No	Description	Weight [g]	Insulated
244800	Cable sheath cutting plier set	2000	✓
244801	Spare cutting wheel set	75	x
244802	Spare ratchet handle	100	x
244803	Spare set of plastic rings	50	x

Stripping Pliers

- ▶ Removes PVC, PE and EPR sheaths
- ▶ Suitable for single-core or three core cables

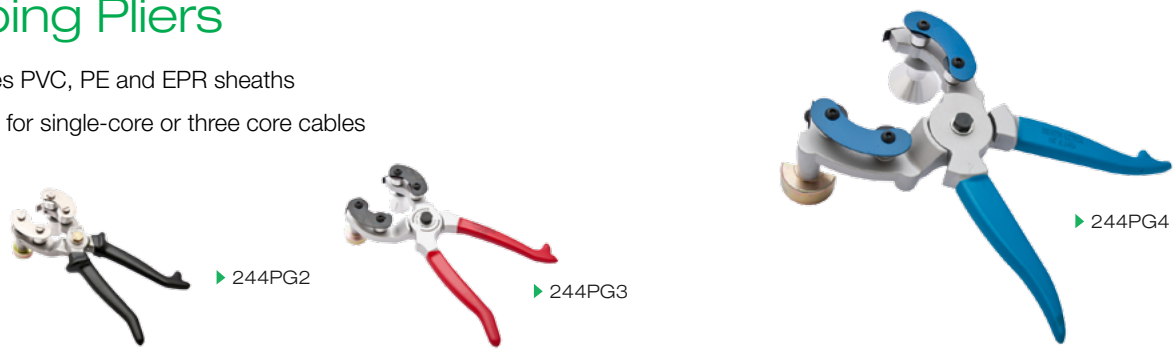


Part No	Description	Capacity [mm]	Length [mm]	Weight [g]
244PG2	Stripping Pliers	Ø 10-25mm	240	650
244PG3	Stripping Pliers	Ø 26-52mm	260	700
244PG4	Stripping Pliers	Ø 47-75mm	290	820
244PG3/4-C	Spare Circ. Blade for 244PG3/PG4	-	-	-
244PG3/4-L	Spare Longt. Blade for 244PG3/PG4	-	-	-



▶ 244PG3

Shaver – for Bonded Semi Conductive Screen

- ▶ Positioned on the cable like a vice
- ▶ Axial feed activation / deactivation device / both directions:
The stripping operation can be done by starting from outside of the cable (as shown in pictures: 25mm of semicon layer will not be stripped) or from inside to outside (about 6mm of semicon layer will be left over)
- ▶ Stripping can be started from any position on the cable
- ▶ Max. rotating diameter 200mm
- ▶ Interchangeable blade
- ▶ Application range: Ø 10 - 52mm
- ▶ Insulation thickness: 0 - 1.5mm
- ▶ Suggested application: Vulcanized, extruded, bonded semiconductive layer

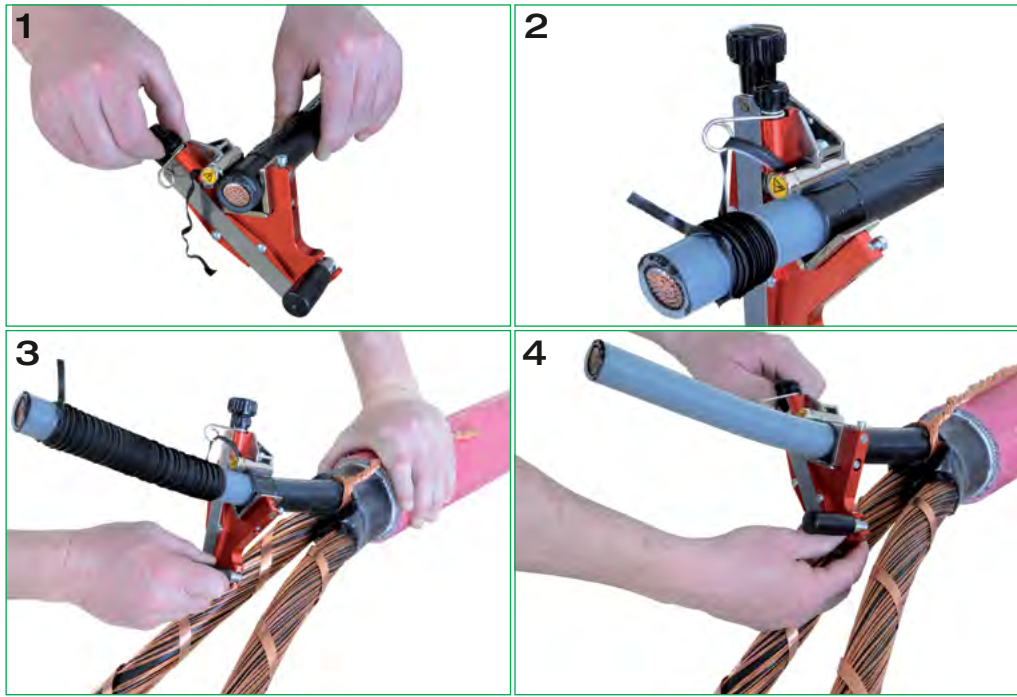

Part No	Description	Weight [g]
244700	Shaver for bonded semi-conductive screen (supplied in plastic case)	1345
244701	Spare blade for 244700 (17°)	5
244702	Silicone Paste for use with 244700	100
244703	Spare blade for 244700 (8°)	20
244706	Spares Kit for 244700 Cylinder/ Plates	10
128930	Spare plastic case for 244700	100
244710	Set consisting of: 244700 / 244702 / 128930 + Instructions	1445