


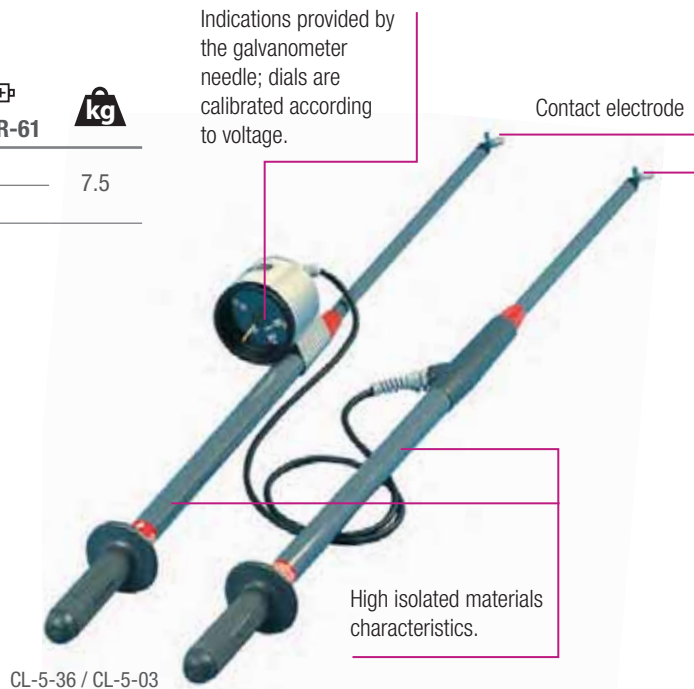


Two-pole phase comparator for indoor and outdoor use

Complete function testing: built-in, with TEST push-button (battery supplied).
Consists of two elements connected by a high-insulation lead.
Removable handles.
Device delivered in metal case.
140 x 250 x 850 mm - 7.5 kg.

CE

Reference	Graduation cadran (kV)	 type 6 LR-61		
CL-5-36	5 - 10 - 15 - 20 - 25 - 30 - 33 - 36	5 - 36 kV	9 V	7.5
CL-5-03	0.750 - 1 - 1.25 - 1.5 - 3	0.75 - 3 kV	9 V	



Permanent luminous indicator for indoor use

Single-pole 5 to 75 kV indicator.

Reference	
CL-40010	Sold in box of 3 units

Signaling the presence of voltage by 7 electroluminescent diodes.



T&D THORNE & DERRICK UK

Tel: +44 (0)191 490 1547
Fax: +44 (0)191 477 5371
Email: northernsales@thorneandderrick.co.uk
Website: www.cablejoints.co.uk
www.thorneandderrick.co.uk