

Flexible models

Nylon (non-conductive).

| Reference | Shackle mm | mm | Holes mm | mm | g |
|-----------|---------------|----|-------------|-----|----|
| ALP-03 | 50 | 3 | 9 | 105 | 20 |
| ALP-06 | 80 | 6 | 9 | 183 | 30 |









Holds up to 6 padlocks.



Nylon
(non-conductive).

All-plastic models

Label with 'DANGER' warning and identification of the person carrying out the work.

| Reference | Shackle | | | Holes | | |
|-----------|--|--|---|--|--|---|
| |  mm |  mm |  |  mm |  mm |  g |
| ALP-4/3 | 46 | 3 | 4 | 8 | 108 | 35 |
| ALP-4/6 | 46 | 6 | 4 | 8 | 108 | 35 |



Holds up to 4 padlocks.



Universal model

Maximum weight supported: 100kg.
'DANGER' warning label.

| Reference | mm | mm | Holes mm | g |
|-----------|---------|----|-------------|-----|
| ALP-12/2M | Ø4 Lg2m | 12 | 9 | 130 |

Steel cable coated in
non-conductive PVC.





Holds up to 9 padlocks.
Nylon body.






Multiple lockers


Metal models

| Reference |  mm | Description |  g |
|-----------|--|-------------|---|
| AL-200 | 100 x 60 x 10 | EDF type A | 150 |
| AL-202 | 165 x 50 x 12 | EDF type B | 200 |

Safety padlock

| Reference |  mm | Shackle  mm |  g |
|-----------|--|--|---|
| AL-203 * | 6 | 50 | 180 |

* Key n°111.

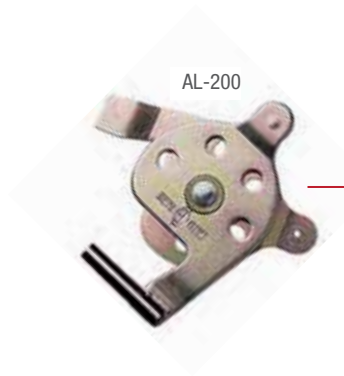






AL-200

Holds up to 4 padlocks of
Ø 6 mm max (AL-203,
AL-230 or AL-240).



AL-202

HASP models

| Reference | Clamping  mm |  | Holes  mm |  mm |  g |
|-----------|---|---|--|--|---|
| ALM-6/25 | 25 | 6 | 9 | 112 | 95 |
| ALM-6/38 | 38 | 6 | 9 | 125 | 110 |
| ALM-20/45 | 20 & 31 | 6 | 9 | 138 | 120 |



ALM-6/25

Holds up to
6 padlocks.



ALM-6/38





ALM-20/45

Double sided.
Holds up to 6 padlocks.

Steel shackle model

Label with 'DANGER' warning and identification of the person carrying out the work.

| Reference | Shackle  mm |  mm | Holes  mm |  mm |  g |
|-----------|--|--|--|--|---|
| ALM-6/8 | 25 | 5 | 8 | 115 | 80 |



Holds up to
6 padlocks.



High-strength steel
shackle and body.