



IEC short-circuiting and earthing systems for MV substations

Installation on permanent fixed points

Reference	Rating (kA/1 s)	Installation on fixed points	Composition	Connection set
MT-1910	20	Ø 20 mm MT-2951 range	3 clamps MT-1911-E 1 MT-1911	3 cables 95 mm ² 1 earth cable 35 mm ²
MT-1920	30	Ø 25 mm MT-3951 range	3 clamps MT-1921-E 1 MT-1921	3 cables 150 mm ² 1 earth cable 50 mm ²

Delivered in case




IEC 61230



Installation on permanent fixed points

Reference	Description
MT-890	Clamps 3 claws
MT-891	Earth clamp fixation
MT-893	Cable tensioner
MT-895	Cable kit support
CI-10-D	Wall mounted support
M-78665	Plastic case MT-1910 or MT-1920


Fixed points
(characteristic page 134).



Plastic case.



3 contact clamps.

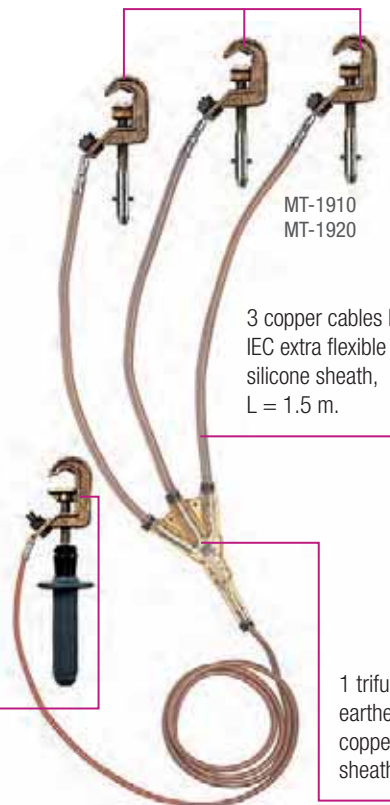

CF-5-40-E

Insulating stick.

Earth
clamp.

Earth clamps

Claw for "T" or round fixed points for round conductors.

Reference	Characteristic	Rating (kA/1 s)	
MT-1911-E	Claw for "T" fixed points MT-1951... Ø 20 mm MT-2951... round fixed points Ø 8 à 18 mm	20	580
MT-1921-E	Claw for "T" fixed points MT-1951... round fixed points Ø 25 mm MT-3951... round conductors Ø 10 à 25 mm	30	690
MT-1911	Same characteristics with handle MT-1911-E	20	—
MT-1921	Same characteristics with handle MT-1921-E	30	—
M-9573	Handle alone C and fitting	—	—

Delivered with screws M 12.

