



VPIS and VDS systems for M.V. cubicles

**Interface for integrated voltage detecting system (V.D.S)**

Indicates the voltage presence on M.V cubicles by being installed on the capacitive dividers. For High impedance detecting systems Input impedance: 36/43 MV. Voltage indication by 4 mm standard sockets on the front of the indicator.

**EIC-61243-5**



Reference	Characteristics	 mm	 g
<b>CL-498-00</b>	Delivered with connection set	146 x 30	90




Voltage indicator by 4 mm standard socket.

CL-498-00

**Separable voltage detecting system (V.D.S)**

This device enables to check the absence or presence of voltage on three phases (L1, L2, L3). HR high impedance. Voltage max: 1 080 V rms. 50/60 Hz. Voltage presence: **RED** flashing LED > 1 Hz. Fits in CL-498 devices.

Reference	Characteristics	 mm
<b>CL-499/101</b>	Delivered in plastic bag	145 x 80

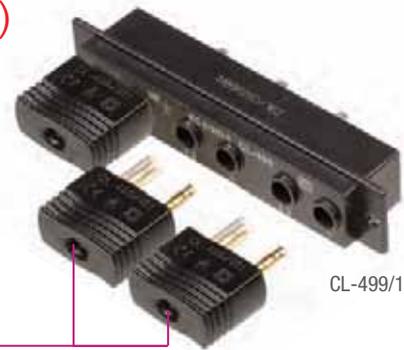

Voltage detector.

CL-499/101

Voltage tester for M.V. separable connectors

**Voltage detectors and indicators**

**CE**

**Voltage tester for M.V. separable connectors 10-36 KV**

Checks the absence of voltage on the capacitive terminals of plug-in M.V. bushings. Sensor in the form of a bent finger enabling removal and reinstallation of the terminal insulating cover. Signal via beeping and bright red flashing of electro-luminescent diodes. Built-in function test via the "TEST" button which covers the entire device. Permanent stand-by state. Power supply: four 1.5 V, R-6 batteries. Mounting on insulating stick via a universal end.

Reference	Characteristics	 g
<b>CC-151-K</b>	Tester in rigid case with batteries 70 x 100 x 165 mm	700
<b>CC-45-K</b>	Stick to use with the CC-151K. L = 1.25 m	600

