

Speedway straight cable ladder is available in standard widths of 150mm, 300mm, 450mm, 600mm, 750mm, 900mm & 1050mm. Other widths from 100mm to 1500mm in 50mm increments are available to order.

Speedway straight cable ladder is available in standard lengths of 3m and 6m. Unless otherwise specified, 3m lengths are supplied as standard. 6m lengths are available to order.

Speedway straight cable ladder is supplied with standard side wall gauges of 1.5mm for SW4 and 2.0 mm for SW5 &

Speedway SW4

Speedway SW4 cable ladder – medium duty ladder for general purpose applications.

Speedway SW4 Cable Ladder		
Height	H	103.5mm
Loading Depth	D	78mm
Ladder Width	W	100mm to 1500mm
Maximum Internal Width	W1	W + 10mm
Overall Width	W2	W + 39mm
Flange Width	F	19.5mm
Standard Gauge	T	1.5mm
Rung Gauge		See 'Technical Data'

Speedway SW5

Speedway SW5 cable ladder – heavy duty ladder suitable for longer spans for general purpose applications.

Speedway SW5 Cable Ladder		
Height	H	125mm
Loading Depth	D	100mm
Ladder Width	W	100mm to 1500mm
Maximum Internal Width	W1	W + 14mm
Overall Width	W2	W + 50mm
Flange Width	F	25mm
Standard Gauge	T	2mm
Rung Gauge		See 'Technical Data'

Speedway SW6

Speedway SW6 cable ladder – extra heavy duty ladder with deeper cable filling capacity, suitable for long span applications.

Speedway SW6 Cable Ladder		
Height	H	150mm
Loading Depth	D	125mm
Ladder Width	W	100mm to 1500mm
Maximum Internal Width	W1	W + 14mm
Overall Width	W2	W + 50mm
Flange Width	F	25mm
Standard Gauge	T	2mm
Rung Gauge		See 'Technical Data'




Order details are as follows:

Ladder Type/SL/Width/Material & Finish

- SW4/SL3/300/GA Speedway SW4 Straight Ladder, 3m Length, 300mm Wide, Hot Dip Galvanized Finish.
- SW5/SL3/900/SS Speedway SW5 Straight Ladder, 3m Length, 900mm Wide, Stainless Steel.
- SW6/SL3/750/GX Speedway SW6 Straight Ladder, 3m Length, 750mm Wide, Deep Galvanized Finish.

SW6. Details of the standard rung gauge configuration are given in 'Technical Data'. Other side wall and rung gauge configurations are available to special order – consult our Sales Team for details. The standard side wall and rung gauge combination will be supplied unless otherwise stated.



Rung spacing on straight ladders is 300mm centres. As standard, the Speedway rung is orientated alternately inverted to allow for cable cleat spacing at 600mm centres. Other orientations such as rungs all facing up or all facing down are available to order.

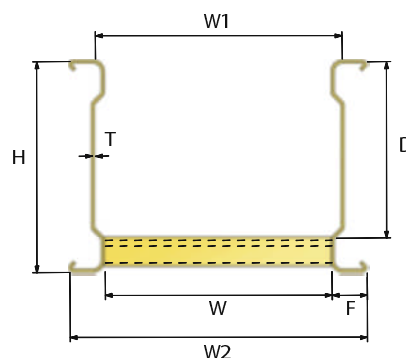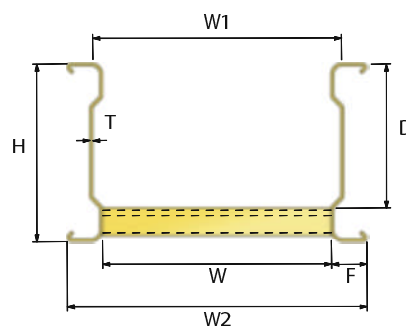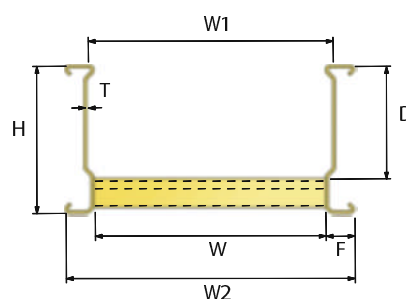


For 6m lengths, change SL3 to SL6:

SW6/SL6/450/GA = Speedway SW6 Straight Ladder, 6m Length, 450mm Wide, Hot Dip Galvanized Finish.


Contact our Sales Team for availability on non-standard straight ladder configurations.

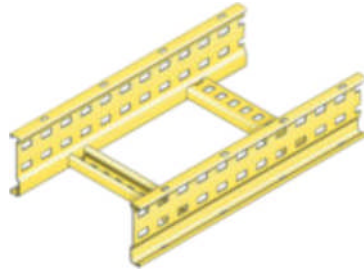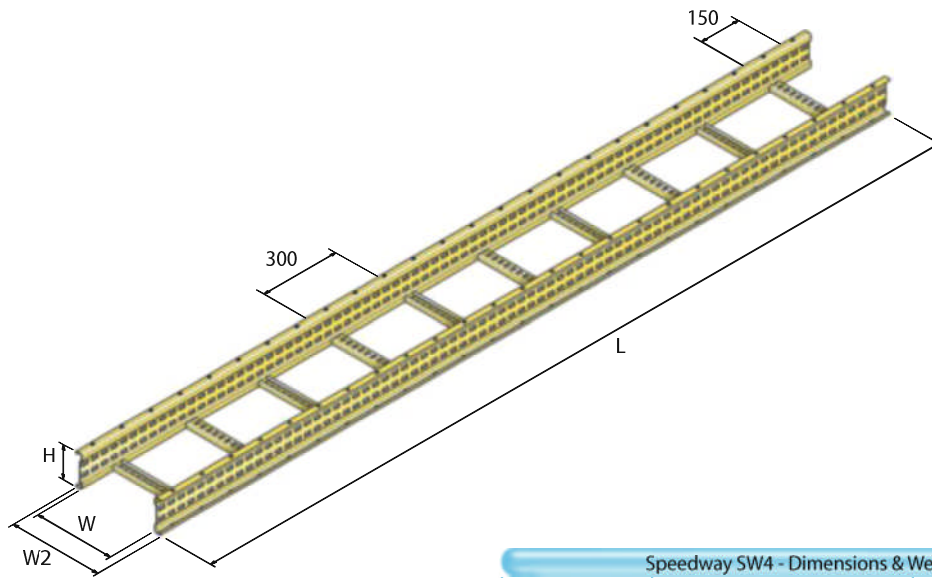

Speedway SW4 Medium Duty Cable Ladder

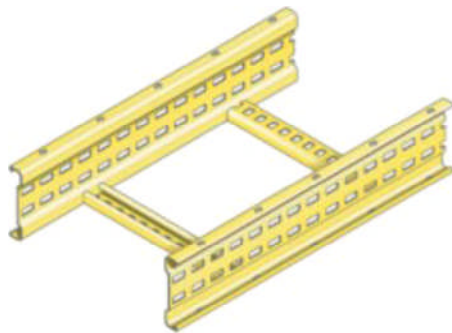

Speedway SW5 Heavy Duty Cable Ladder

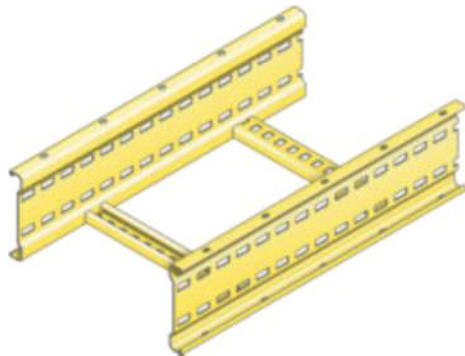

Speedway SW6 Extra Heavy Duty Cable Ladder

Speedway SW4 - Dimensions & Weights

Ladder	Dimensions mm				Weight Each		
	W	W2	L	H	GA	SS	GX
SW4/SL3/150/#	150	189	3000	103.5	11.69	11.13	12.24
SW4/SL3/300/#	300	339			13.32	12.67	14.15
SW4/SL3/450/#	450	489			14.94	14.22	15.88
SW4/SL3/600/#	600	639			16.57	15.77	17.61
SW4/SL3/750/#	750	789			20.90	17.32	19.34
SW4/SL3/900/#	900	939			23.07	18.87	21.06
SW4/SL3/1050/#	1050	1089			25.24	20.41	22.79

- Finish & Material

Speedway SW5 - Dimensions & Weights

Ladder	Dimensions mm				Weight Each		
	W	W2	L	H	GA	SS	GX
SW5/SL3/150/#	150	200	3000	125	18.31	17.94	19.46
SW5/SL3/300/#	300	350			19.94	20.01	21.18
SW5/SL3/450/#	450	500			21.56	22.07	22.91
SW5/SL3/600/#	600	650			23.19	24.14	24.64
SW5/SL3/750/#	750	800			27.53	26.20	26.37
SW5/SL3/900/#	900	950			29.70	28.26	28.10
SW5/SL3/1050/#	1050	1100			31.87	30.33	29.83

- Finish & Material

Speedway SW6 - Dimensions & Weights

Ladder	Dimensions mm				Weight Each		
	W	W2	L	H	GA	SS	GX
SW6/SL3/150/#	150	200	3000	150	21.70	20.33	23.04
SW6/SL3/300/#	300	350			25.01	22.40	25.37
SW6/SL3/450/#	450	500			27.31	24.46	27.71
SW6/SL3/600/#	600	650			29.62	26.53	30.05
SW6/SL3/750/#	750	800			31.92	28.59	32.39
SW6/SL3/900/#	900	950			34.22	30.66	34.73
SW6/SL3/1050/#	1050	1100			36.53	32.72	37.07

- Finish & Material

Weights given above are for 3m lengths of Speedway cable ladder using the standard ladder side and rung gauge combination. Contact our Design Team for weights for other gauges & finishes. ■