

Cable Hanger - 'J' Hanger type 3 Way - Power Cables P93 series

Benefits:


- ◆ London Underground standards compliant
 - ◆ High strength
 - ◆ Chemical resistant
 - ◆ 50 Year effective life
 - ◆ No 'burrs' to snag or damage the cable
 - ◆ Easily manageable lightweight product
 - ◆ Serviceable to 330 Deg. C
 - ◆ Not subject to bimetallic corrosion
 - ◆ Non-metallic & Non-magnetic
 - ◆ 100% recyclable
 - ◆ Low Carbon Footprint
 - ◆ Simple standard 'J' Hanger installation process
 - ◆ None rusting and no maintenance required (no requirement to apply protective coatings)
 - ◆ Choice of raw material compounds for specific applications
 - ◆ Suitable for usage & storage in openly exposed, potentially hazardous & hostile environments
 - ◆ Low Smoke Zero Halogen properties exceeding LUL specification
-
- ◆ Independent Laboratory Tested for Fire, Smoke Emissions, Toxicity, Load Bearing and Impact Performance

Material:

- High Strength smooth surface thermoplastic resin
- Excellent electrical and thermal insulator with high dielectric strength and arc quenching
- Corrosion free stable - not subject to attack by weather, chemical or biological agents
- Dimensionally stable material with no directional 'grain' weakness

Product:

- Standard product colouring in Black and Grey - other colours are available to special order
- Complies with The London Underground Limited Engineering Standard **"Fire safety performance of materials"** specification - Document Reference No. 1-085

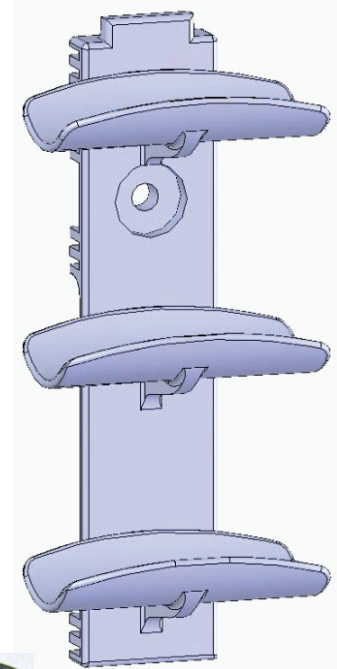

PART NO.	CABLE HANGERS	MAX CABLE Ø (mm)	HANGER SPACING (mm)	WIDTH (mm)	OVER-ALL HEIGHT (mm)	DEPTH (mm)	SAFE WORKING LOAD (SWL) (Kg)	WEIGHT (g)	BOLT SIZE MAX (mm)
M-311/P93	3-WAY	86	120 & 127	150	349	110	900	758	16

- Other recognised London Underground 'J' Hanger formats also supplied

Doc Ref 311P93-AG-01.2