

## Suspension Hooks Data Sheet

Manufactured in mild steel. Hot dipped galvanised after manufacture. Special designs available on request. Used to hand cables on walls or support structures.



Type A




Type B




Type C


Part Number	Max Cable dia mm	Dimensions			Material Size		Pack Qty	Weight g	SWL kgs	
		mm			W	Thickness				
		T	U	V						
SHA1	50	105	25	11	40	6	1	320	200	Type A
SHA2	75	120	25	13	50	6	1	490	250	
SHA3	100	155	25	13	50	6	1	1300	250	
SHB1	50	125	55	11	40	6	1	440	200	Type B
SHB2	75	140	60	13	50	6	1	680	250	
SHB3	100	150	60	13	50	6	1	780	250	
SHC1	50	125	40	13	40	6	1	460	200	Type C
SHC2	75	140	45	13	50	6	1	700	250	
SHC3	100	150	45	13	50	6	1	780	250	



Type A



Type B

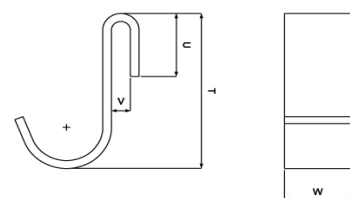

Type C