




HEAVY DUTY COPPER TUBE TERMINALS

2A-M

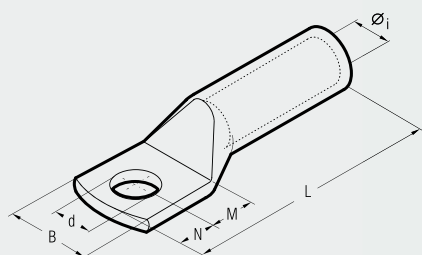

Conductor Size sqmm	Ø Stud mm	Ref.	Dimensions mm						Quantity Box/Bag	Mechanical Tools		Hydraulic Tools			
			Øi	B	M	N	L	d							
16	8	2 A 3-M 8	5,8	15,0	9	8	43,5	8,4	600/100	HN 5		B 15			
	10	2 A 3-M 10	5,8	18,0	11	10	47,5	10,5	500/100						
25	8	2 A 5-M 8	7,0	15,0	9	8	51,0	8,4	400/100						
	10	2 A 5-M 10	7,0	18,0	11	10	55,0	10,5	300/50						
35	12	2 A 5-M 12	7,0	21,0	14	12	60,0	13,2	300/50						
	8	2 A 7-M 8	8,9	17,0	9	8	53,0	8,4	250/50						
50	10	2 A 7-M 10	8,9	19,0	11	10	57,0	10,5	250/50	TN 70 SE					
	12	2 A 7-M 12	8,9	21,0	14	12	62,0	13,2	250/50						
63	10	2 A 10-M 10	10,0	20,0	11	10	63,0	10,5	200/50						
	12	2 A 10-M 12	10,0	21,0	14	12	68,0	13,2	150/50						
70	14	2 A 10-M 14	10,0	25,0	16	14	72,0	15,0	150/50						
	16	2 A 10-M 16	10,0	26,0	18	16	76,0	17,0	150/50						
95	10	2 A 14-M 10	11,3	21,0	11	10	70,0	10,5	100/50	TN 120 SE					
	12	2 A 14-M 12	11,3	22,0	14	12	75,0	13,2	100/50						
120	14	2 A 14-M 14	11,3	25,0	16	14	79,0	15,0	100/50						
	16	2 A 14-M 16	11,3	26,0	18	16	83,0	17,0	100/50						
125	10	2 A 19-M 10	13,5	25,0	11	10	76,5	10,5	75/25						
	12	2 A 19-M 12	13,5	25,0	14	12	81,5	13,2	75/25						
150	14	2 A 19-M 14	13,5	25,0	16	14	85,5	15,0	75/25						
	16	2 A 19-M 16	13,5	27,0	18	16	90,5	17,0	75/25						
185	20	2 A 19-M 20	13,5	29,5	22	20	97,5	21,0	75/25						
	10	2 A 24-M 10	15,2	28,5	11	10	82,0	10,5	50/25						
240	12	2 A 24-M 12	15,2	28,5	14	12	87,0	13,2	50/25						
	14	2 A 24-M 14	15,2	28,5	16	14	91,0	15,0	50/25						
300	16	2 A 24-M 16	15,2	28,5	18	16	95,0	17,0	50/25						
	20	2 A 24-M 20	15,2	30,0	22	20	103,0	21,0	50/25						
400	10	2 A 30-M 10	16,7	31,5	13	11	92,0	10,5	50/25						
	12	2 A 30-M 12	16,7	31,5	16	14	98,0	13,2	30/15						
500	14	2 A 30-M 14	16,7	31,5	18	16	102,0	15,0	30/15						
	16	2 A 30-M 16	16,7	31,5	19	17	104,0	17,0	30/15						
600÷630	20	2 A 30-M 20	16,7	31,5	22	20	110,0	21,0	30/15						
	12	2 A 37-M 12	19,2	35,5	16	14	108,0	13,2	30/15						
800	14	2 A 37-M 14	19,2	35,5	18	16	112,0	15,0	30/15						
	16	2 A 37-M 16	19,2	35,5	19	17	114,0	17,0	30/15						
1000	20	2 A 37-M 20	19,2	35,5	22	20	120,0	21,0	30/15						
	12	2 A 48-M 12	21,1	39,0	16	14	109,0	13,2	20/5						
	14	2 A 48-M 14	21,1	39,0	18	16	113,0	15,0	20/5						
	16	2 A 48-M 16	21,1	39,0	19	17	115,0	17,0	20/5						
	20	2 A 48-M 20	21,1	39,0	22	20	121,0	21,0	25/5						
	12	2 A 60-M 12	23,7	44,0	20	14	129,5	13,2	20/5						
	14	2 A 60-M 14	23,7	44,0	22	16	133,5	15,0	20/5						
	16	2 A 60-M 16	23,7	44,0	22	19	136,5	17,0	20/5						
	20	2 A 60-M 20	23,7	44,0	24	23	142,5	21,0	20/5						
	12	2 A 80-M 12	27,0	51,0	22	19	140,0	13,2	15/5						
	14	2 A 80-M 14	27,0	51,0	22	19	140,0	15,0	10/5						
	16	2 A 80-M 16	27,0	51,0	22	19	140,0	17,0	10/5						
	20	2 A 80-M 20	27,0	51,0	24	23	146,0	21,0	15/5						
	16	2 A 100-M 16	30,3	56,5	22	19	147,0	17,0	10/5						
	20	2 A 100-M 20	30,3	56,5	24	23	153,0	21,0	10/5						
	16	2 A 120-M 16	33,4	61,5	22	19	159,0	17,0	20/5						
	20	2 A 120-M 20	33,4	61,5	24	23	165,0	21,0	20/5						
	800	2 A 160-M 20	38,0	72,0	24	23	187,0	21,0	12/3						
	1000	2 A 200-M 20	44,0	80,0	24	23	202,0	21,0	6/2						

2A-M series are made from high purity copper tube, and are annealed.

They feature a double length barrel for enhanced electrical and mechanical performance in heavy duty applications.

The absence of an inspection hole prevents the entry of water or moisture into the crimped joint making these terminals suitable for outdoor applications.

The terminals are electrolytically tin plated to prevent atmospheric corrosion.

2A-2M series terminals with double stud hole palm are available against specific requirements.