

## HYDRAULIC CRIMPING TOOL

### HT 131-C



This new model, self contained, robust and sturdy, will accept all semi-circular slotted dies, common to most 130 kN tools. The tool features a double speed action: a fast advancing speed for rapid approach of the dies to the connector and a slower more powerful speed for crimping. For ease of operation and comfort of the operator the tool head can be fully rotated through 180 degrees.

### general features

Crimping force kN	Dimensions mm		Weight kg
	length	width	
130	473	144	5,5

#### MAIN APPLICATIONS - max section mm<sup>2</sup>

L.V. lugs and splices	Insulated terminals	"C" sleeve connectors	H.V. lugs and splices
400	240	185	400

#### STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Available upon request
VAL P3*	620x380xh135	2,5	✳	—


\*Suitable for storage of the tool and 14 sets of dies

The built-in safety valve will by-pass the oil supply when the maximum pressure is reached, and the pressure release system can easily be operated at any stage of compression.



## HYDRAULIC PRESSHEADS

### RHC 131

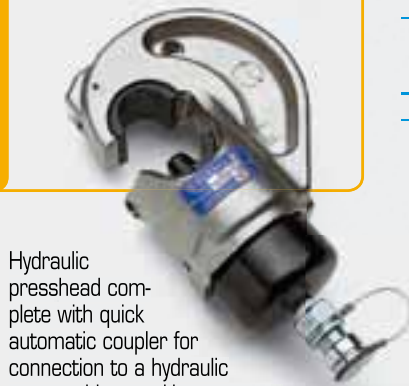

Hydraulic presshead complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 138-140) This new design with improved mechanical features,

### general features

Crimping force kN	Max operating pressure bar	Dimensions mm		Weight kg
		length	width	
130	700	232	124	3,8



is suitable for installing the same range of connectors as HT 131-C.

#### MAIN APPLICATIONS - max section mm<sup>2</sup>

L.V. lugs and splices	Insulated terminals	"C" sleeve connectors	H.V. lugs and splices
400	240	185	400


#### STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Available upon request
VAL P8*	445x290xh115	1,2	—	✳

\*Suitable for storage of the head and 14 sets of dies



### RHM 132

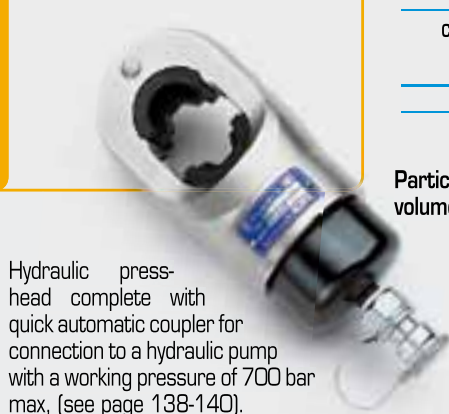

Hydraulic press-head complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 138-140).

### general features

Crimping force kN	Max operating pressure bar	Dimensions mm		Weight kg
		length	width	
130	700	216	80	3,1

Particularly suitable for high volume bench crimping.

#### MAIN APPLICATIONS - max section mm<sup>2</sup>

L.V. lugs	Insulated terminals	H.V. lugs
400	240	400

#### STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Available upon request
VAL P8*	445x290xh115	1,2	—	✳

\*Suitable for storage of the head and 14 sets of dies



These tools are supplied without dies. For die selection, please refer to chart on pages 144 to 150