



Local Control Station - Glass Reinforced Polyester Enclosure



LCP120 - Ex ed Single Mushroom Pushbutton

HAZARDOUS AREA SPECIFICATION			
Marking to 94/9/EC		Ex II 2 GD	
Type of Protection		Ex edm IIC T* Gb Ex tb IIIC T**C Db	
Ambient Temp.*°C		Gas Temperature Class (T*°C)	Dust Temperature Class (T**)(°C)
Min	Max		
-20*	+55	T6	85
* -40°C when used with a plug and gland rated to -40°C			
Ingress Protection		IP66 to EN60529:1992	
Area Classification		Zones 1,2,21,22	
Certification No.		SIRA03ATEX3293, GOST-R POCC GB.Mn14.B00074	

ENCLOSURE SPECIFICATION	
Material Box	Carbon loaded anti-static glass reinforced polyester UL94/V0
Finish	Moulded black
Weight Empty	0.7Kg
Cover Fixing	M6 Stainless Steel hexagon head screws
Gasket	1.2 mm one piece solid nitrile rubber
Earthing	Internal Ex e brass clamps on base
Entries	1x20mm threaded hole in face A, fitted with a nylon Ex e stopping plug. 1x20mm threaded hole in face B, fitted with a nylon Ex e cable gland. 25mm entries are available as an option.
Mounting	Through 7mm holes moulded into base

ELECTRICAL SPECIFICATION		
Operating Voltage	Operating Current	Conductor Size
Volts Max	Amps	mm² Max
420	20	2.5

Walsall Ex de IIC switch. Certification No. SIRA03ATEX1269U

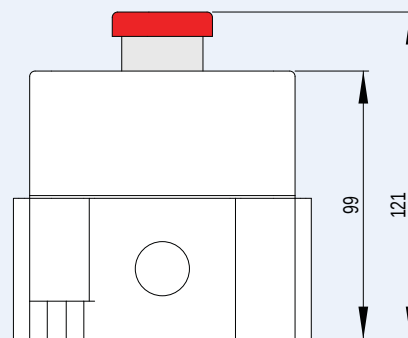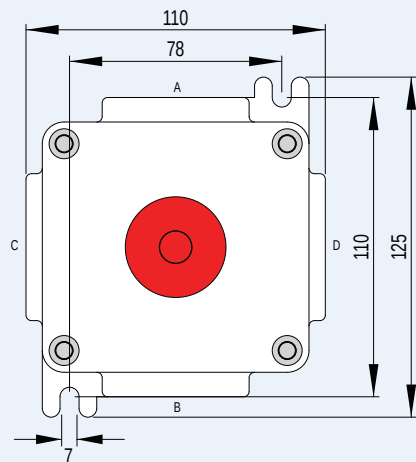

All Dimensions in mm.

ORDERING INFORMATION

Description	Action	Contacts	Labelling	Product Code
Red Mushroom Pushbutton	Spring		0	LCP121
			STOP	LCP122
Green Mushroom Pushbutton	Spring		1	LCP123
			START	LCP124
Red Latching Mushroom Pushbutton	Pull release		0	LCP125
			STOP	LCP126
Red Latching Mushroom Pushbutton	Key Release		0	LCP127
			STOP	LCP128

Notes
1 For 25mm entries add /25 to Product Code e.g. LCP123/25
2 Alternative labelling to order.
3 Alternative handle colour to order.