



FLEXMASTER®

Installation Instructions


The Glasdon 'Flexmaster' Installation tool is only for use with the Glasdon 'Flexmaster' post.




1
Important- position post with red reflector facing the near side of oncoming traffic.




2
Before operating 'Flexmaster' tool, withdraw the safety catch.




3
Place curve of fixing tool blade in ground, matching post position and shape. (see 1)

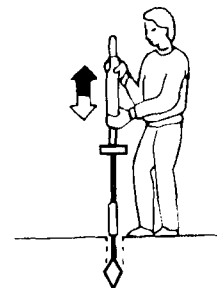


4
Hold main body of tool, raise high and pile drive up and down to required depth, when handgrip meets the ground.

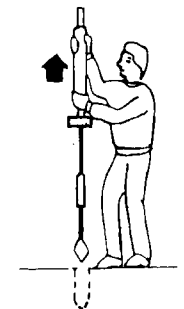


5
To remove tool, reverse pile driving action.

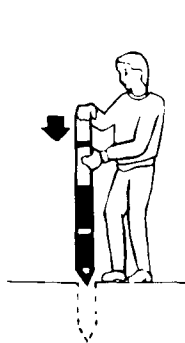


6
Place a 'Flexmaster' post point first into the shaped pilot hole, check that reflectors are facing the correct way (see 1). Push in (lightly).

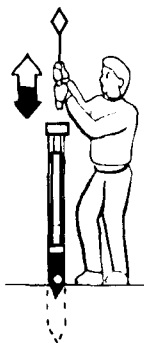

7
Turn tool upside down, holding the main body and hand grip of tool so blade is uppermost.

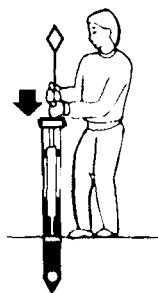


8
Holding the hand grip, raise high and pile drive up and down until the post reaches the correct depth - when the main body of the tool reaches the ground.



9
Installation of 'Flexmaster' is now complete - remove tool and check positioning.



10
For Safety's Sake Please exercise caution when using this tool. Always re-engage the safety catch after use or when transporting.

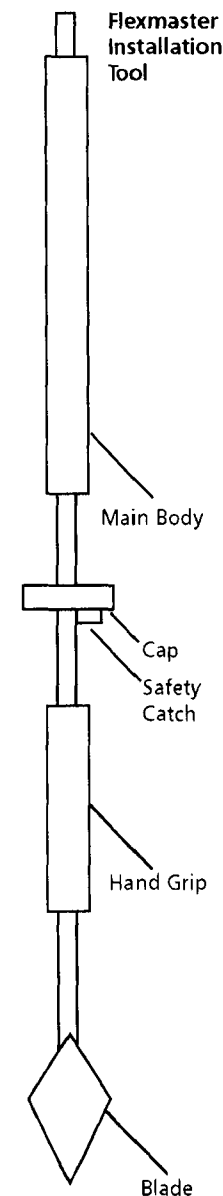

- A planned maintenance schedule of regular inspection is recommended, replacing components as necessary.
- Replacement components are available direct from GLASDON UK LTD
- GLASDON UK LTD. cannot be held responsible for claims arising from incorrect installation, unauthorised modifications or misuse of the product.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK



Glasdon®

